


# Access Control Software Operation Guide

## UHPPOTE

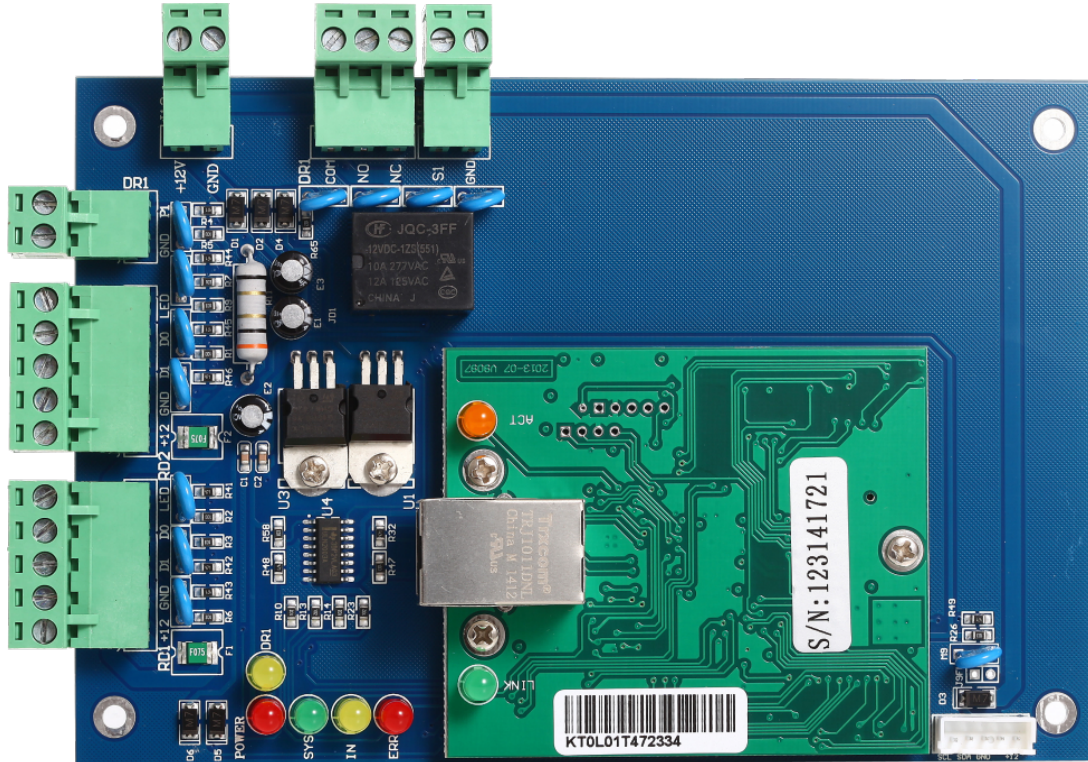

Default User & Password:

User: abc

Password: 123

Extended Function Password: 5678

Register Code: 2004

Remarks: Please install the management software from the accompanying CD or the following download link.

Software Download Link:

[http://www.wiegand.com.cn/soft/soft\\_all\\_32/MJ\\_all\\_en.rar](http://www.wiegand.com.cn/soft/soft_all_32/MJ_all_en.rar)

**Shenzhen Detai E-business Co.,Ltd.**

## CONTENTS

<b>Part 1 Installation and Uninstallation of Software.....</b>	<b>5</b>
1.1 Basic Steps of Installation .....	5
1.2 Basic requirements for hardware of Installation .....	5
1.3 Operating system supported by software.....	5
1.4 Software Setup.....	5
1.5 Software Remove.....	9
<b>Part 2 Basic Operation of Software .....</b>	<b>10</b>
2.1 Login .....	10
2.2 Parameter Settings of Equipment .....	11
2.2.1 Add/Set up Controller .....	11
2.2.2 IP setting of Controller .....	13
2.2.3 Controller Zone Management.....	15
2.3 Operation of Department and Registered User.....	16
2.3.1 Add Department.....	16
2.3.2 Add and Edit a User.....	17
2.3.3 Auto Add the registration card .....	19
2.3.4 Alter Single-user's Privilege.....	22
2.3.5 Card Lost .....	22
2.4 Operation .....	23
2.4.1 Privilege Management.....	23
2.4.1.1 Access Privilege .....	23
2.4.1.2 Edit One User's Privilege .....	24
2.5 Console .....	24
2.5.1 Controller's Info Check .....	25
2.5.2 Upload Setting .....	25
2.5.3 Monitor.....	26
2.5.4 Display More Swipes .....	27
2.5.5 Getting Swipe Records.....	28
2.6 Records Query .....	28
2.7 Tools .....	29
2.7.1 Change Password .....	29
2.7.2 DB Backup.....	30
2.7.3 Option .....	31
<b>Part 3 Extended Function .....</b>	<b>32</b>
3.1 File .....	33
3.1.1 Active Log Query .....	33
3.2 Configuration .....	34
3.2.1 Record Push Button Events .....	34

3.2.2 Record Door Status Events .....	34
3.2.3 Activate Time Profile .....	35
3.2.4 Activate Peripheral Control .....	38
3.2.5 Activate Access Keypad .....	39
3.2.6 Activate Anti Pass Back .....	41
3.2.7 Activate Inter Lock .....	41
3.2.8 Activate MultiCard Access .....	42
3.2.9 Activate First Card Open .....	42
3.2.10 Activate Controller TaskList.....	43
3.3 Operation .....	44
3.3.1 Activate Remote Open Door.....	44
3.4 Multifunction .....	45
3.4.1 Activate Meal .....	45
3.4.1.1 Meal Setup .....	45
3.4.1.1.1 Readers .....	45
3.4.1.1.2 Rules .....	46
3.4.1.1.3 Meal Period .....	46
3.4.1.2 Meal Report.....	48
3.4.1.2.1 Meal Details Report.....	48
3.4.1.2.2 Meal Stat. report of Readers for Meal .....	48
3.4.1.2.3 Meal Stat. report of Subtotal of Department.....	48
3.4.1.2.4 Meal Stat. report of Users .....	49
3.4.2 Activate Patrol.....	49
3.4.2.1 Patrol Setup .....	50
3.4.2.1.1 Patrol Point.....	50
3.4.2.1.2 Patrol Rules.....	50
3.4.2.1.3 Patrolman .....	51
3.4.2.2 Patrol Route .....	51
3.4.2.3 Patrol Task .....	52
3.4.2.4 Patrol Report.....	53
3.4.2.5 Patrol Statistics .....	54
3.4.3 Activate Meeting .....	54
3.4.3.1 Address Setup.....	55
3.4.3.2 Add Meeting .....	56
3.4.3.3 Meeting Stat.....	57
3.4.3.4 Realtime Sign.....	57
3.4.4 Activate One To More .....	57
3.4.4.1 Add One To More Controller.....	58
3.4.4.2 One To More Management .....	58
3.4.4.2.1 Door Management.....	59

- 3.4.4.2.2 Set user up to door ..... 60
- 3.5 Tools ..... 61
  - 3.5.1 Activate Operator Management ..... 62
- Part 4 Attendance ..... 62**
  - 4.1 Normal Shift Rules ..... 63
  - 4.2 Holiday ..... 63
  - 4.3 Leave/Business Trip ..... 64
  - 4.4 Manual Sign In ..... 64
  - 4.5 Attendance Report ..... 65
- Part 5 Appendix ..... 66**
  - 5.1 How to display user's photo when Monitoring ..... 66
  - 5.2 SQL Server Configuration ..... 67
  - 5.3 Import consumer's information from Excel ..... 69



# Part 1: Installation and Uninstallation of Software

## 1.1 Basic Steps of Installation

- 1、 If you system is Windows XP, it's required to install patch Windows XP SP3.
- 2、 Install software Access Control.

## 1.2 Basic requirements for hardware of Installation

Memory: 1GB. Hard Disk: 1GB above of free space.

## 1.3 Operating system supported by software


Windows XP SP3 / Windows 7 / Windows Server 2003 SP2 / Windows Server 2008 / Windows Server 2008 R2

## 1.4 Software Setup


First puts in the CD to CD-ROM, then run the applications of "setup.exe".




Click "English"

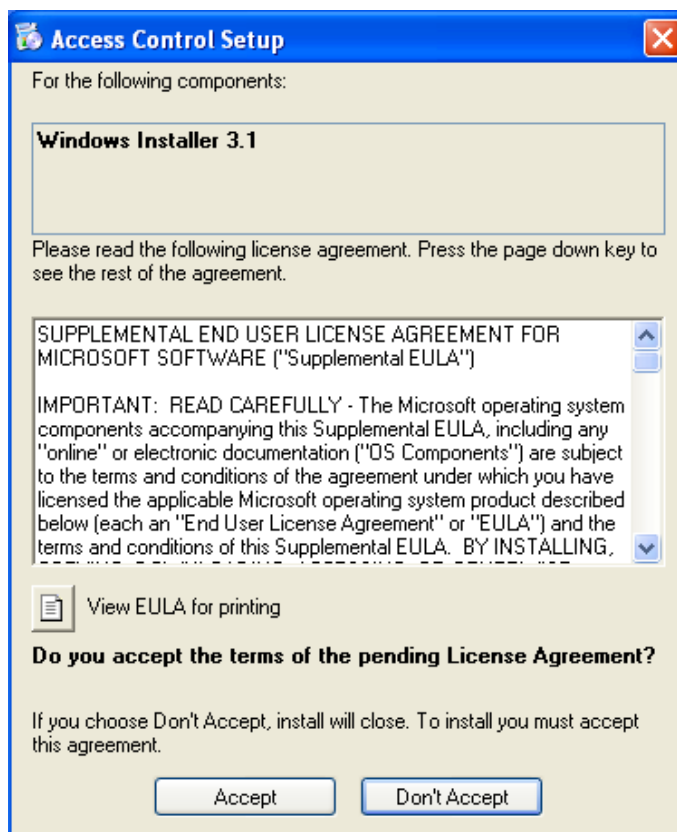


Click "Accept"

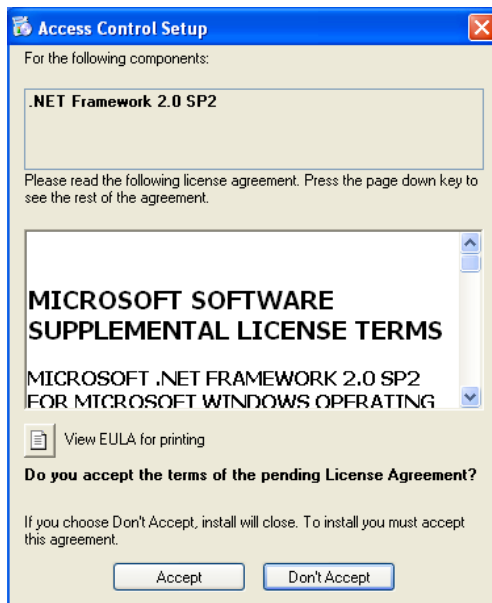

Click "Accept"

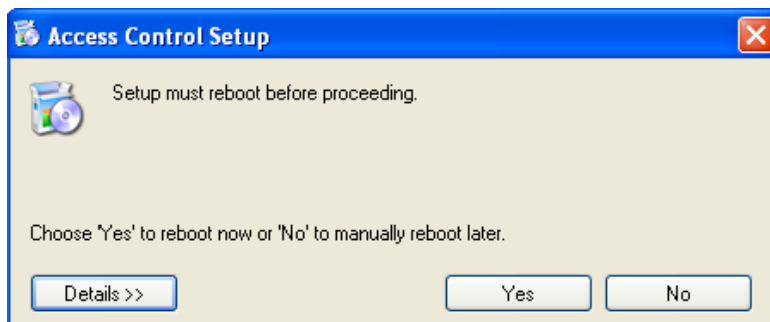


Click "Yes"

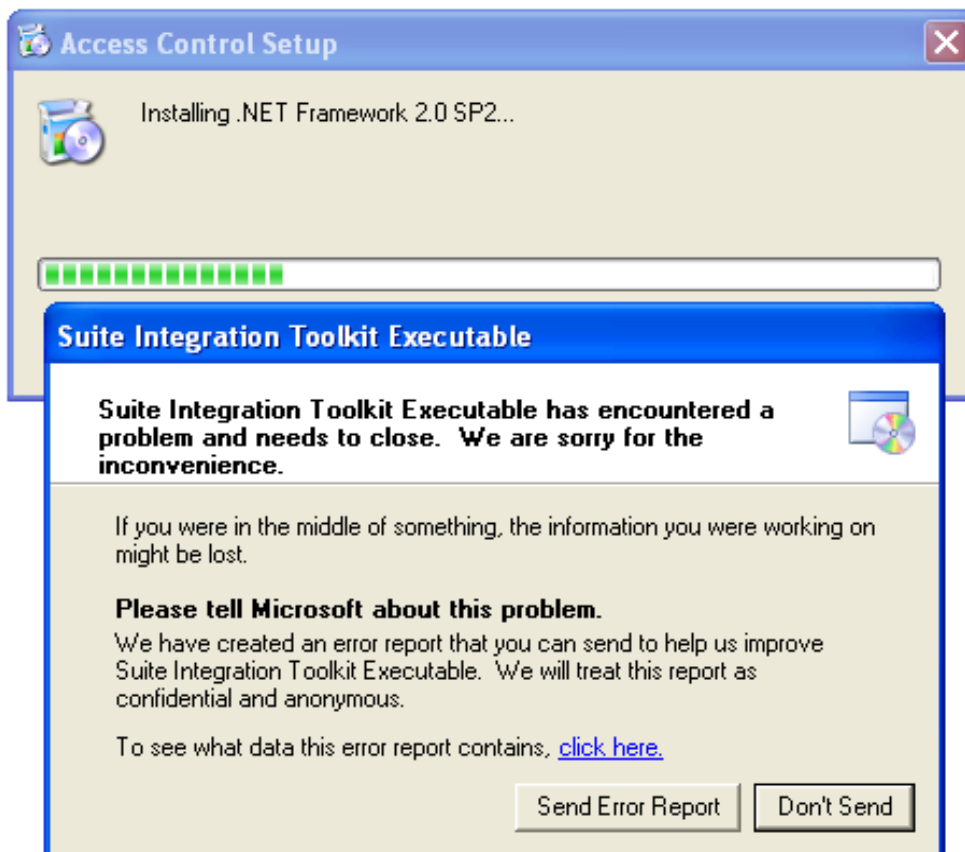


If the error occurs, need to install xp sp3. then install the software.

“Microsoft . NET Framework” is required to install, please do not skip. If you do not install “Microsoft . NET Framework”, the program will not work correctly.


The system will enter into next step for you to install Access Control , if your computer has installed it.

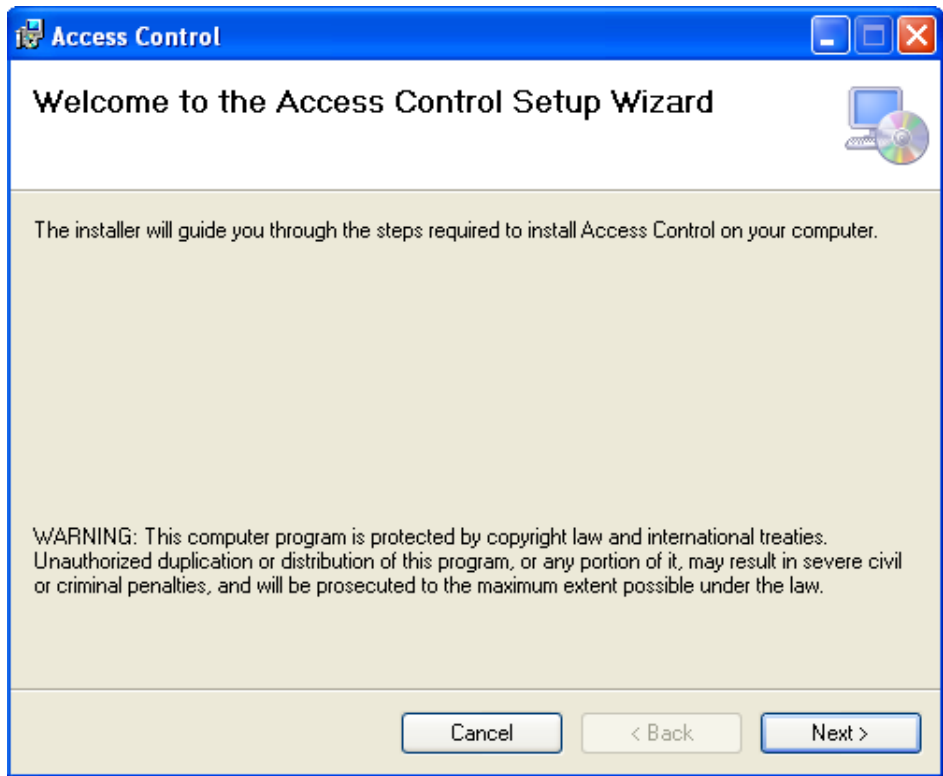


Click “Next”

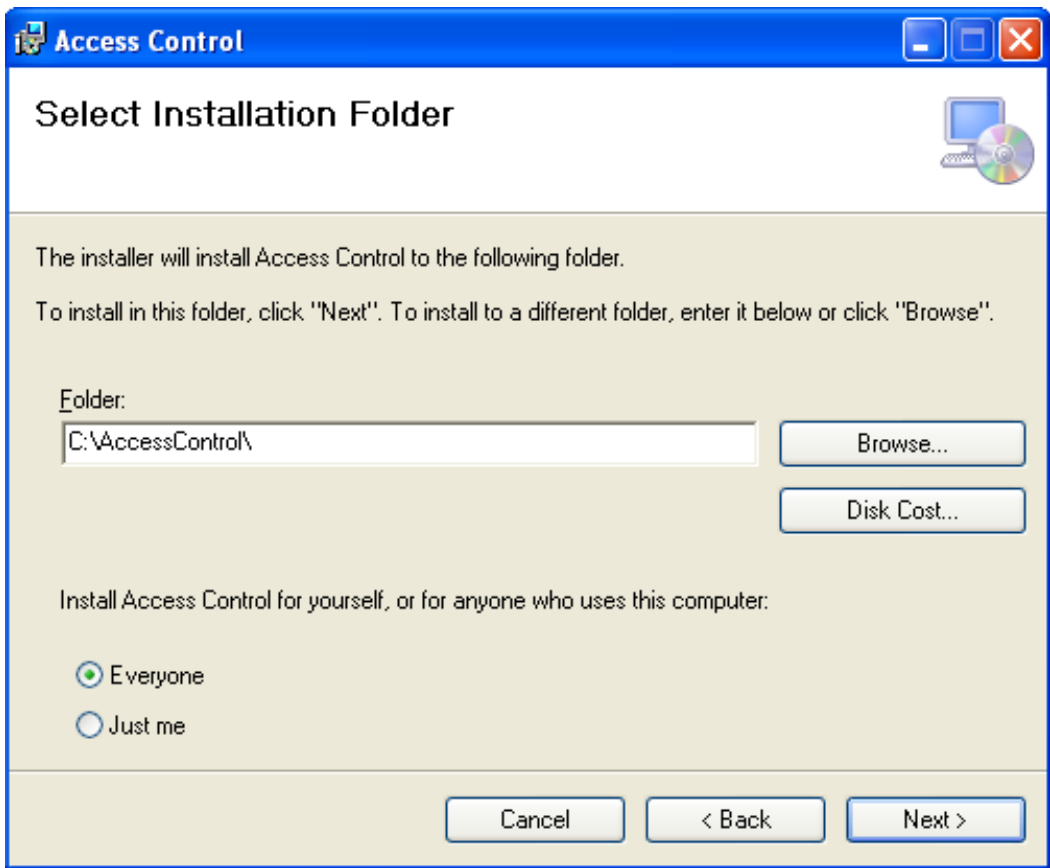


Click "Next"

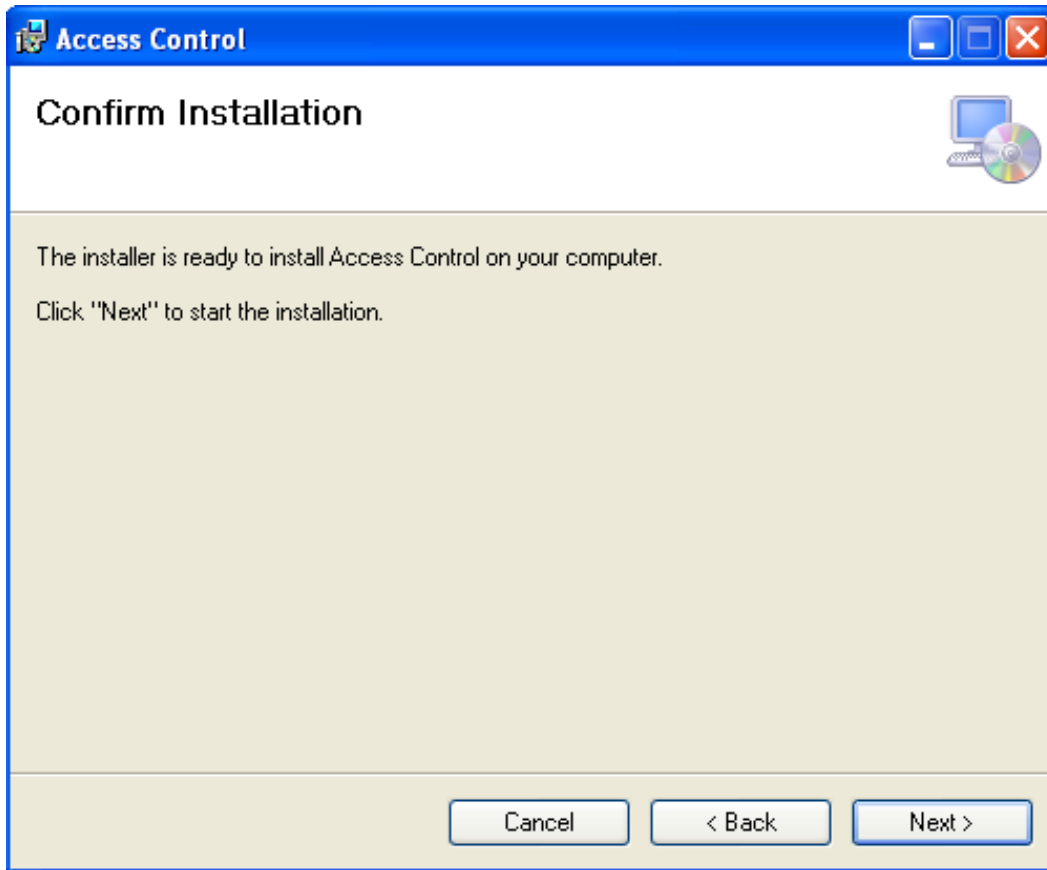

Click "Next"

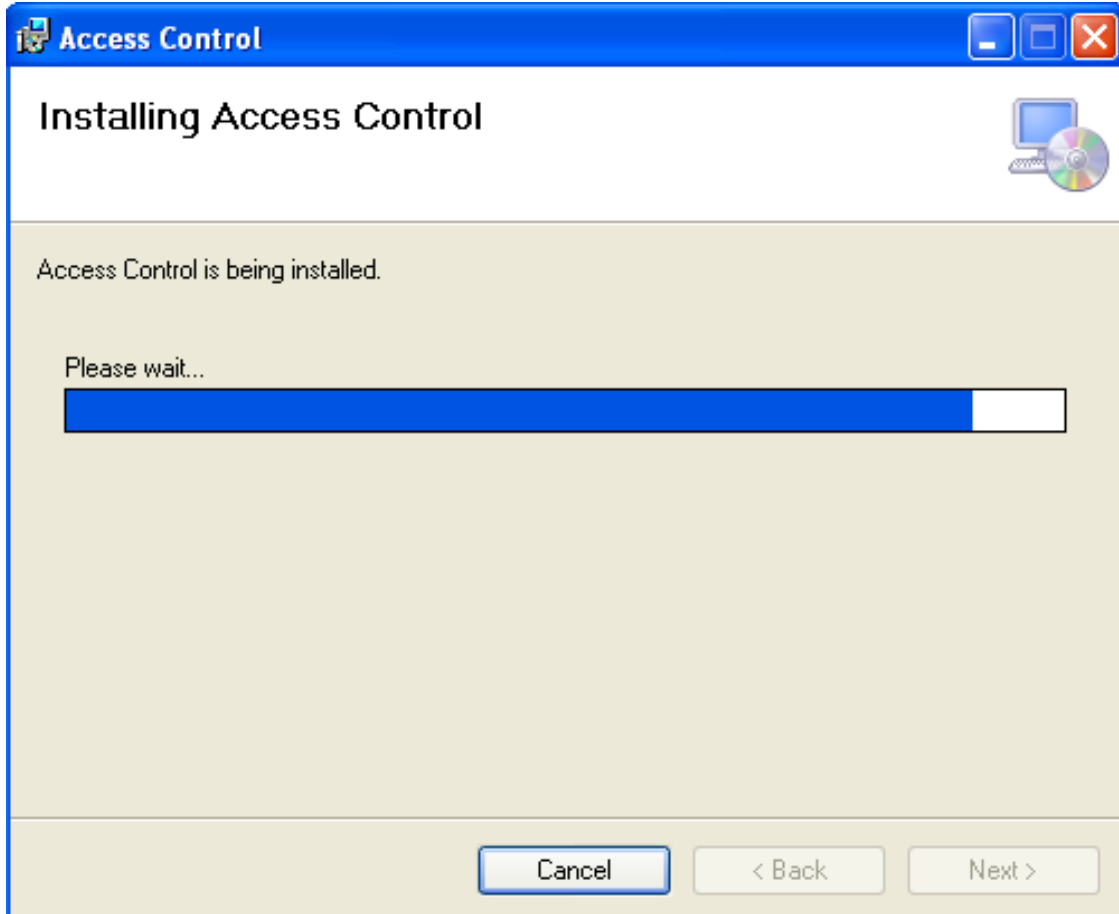

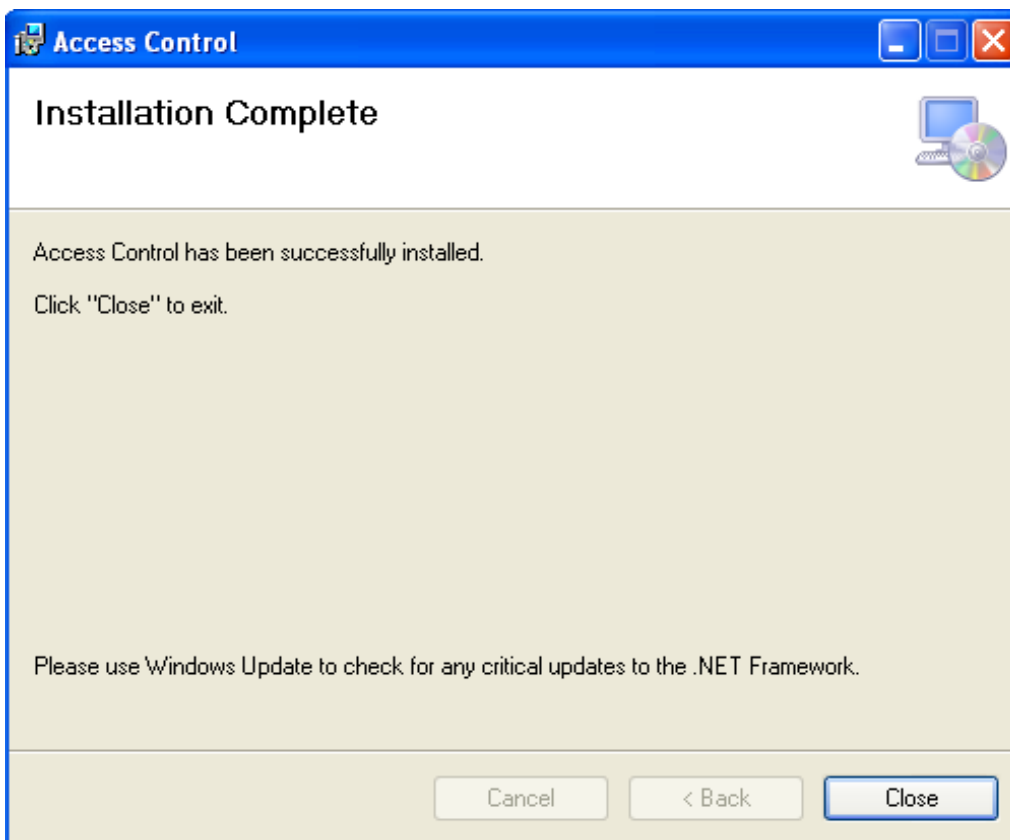


Click "Close"


After the installation completes, The   will be created automatically and display in the computer screen.

## 1.5 Software Remove


Click **【start】 > 【Settings】 > 【Control Panel】**

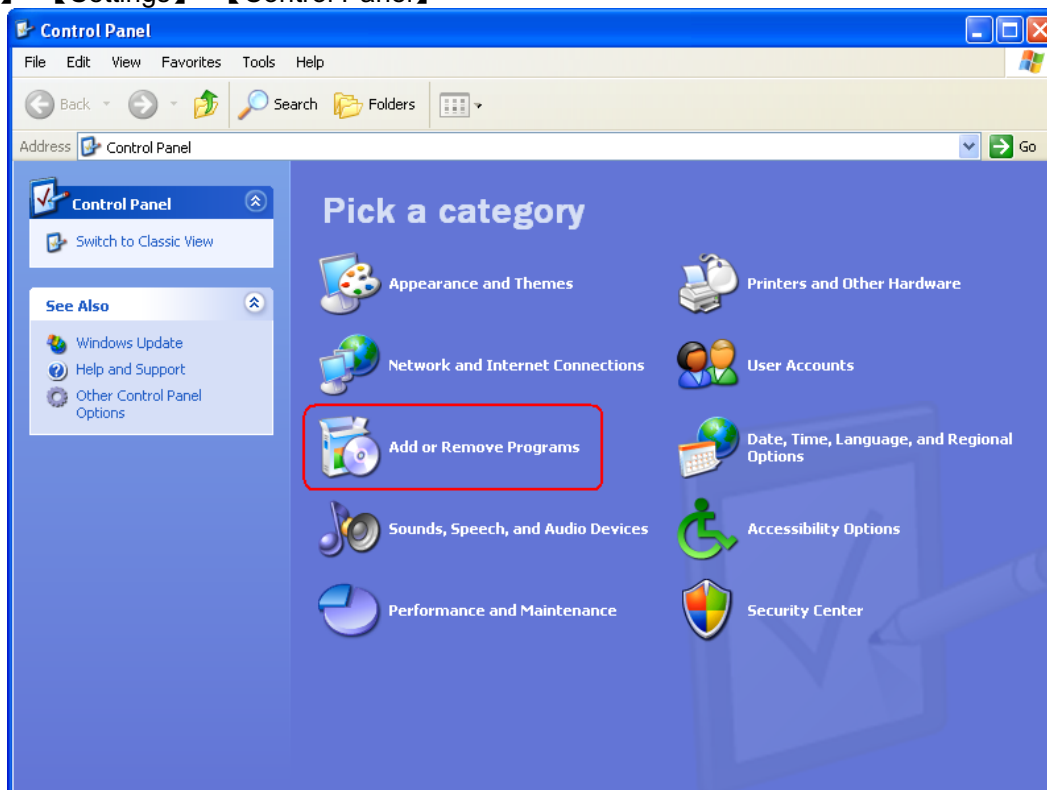


Click "Add or Remove Programs"

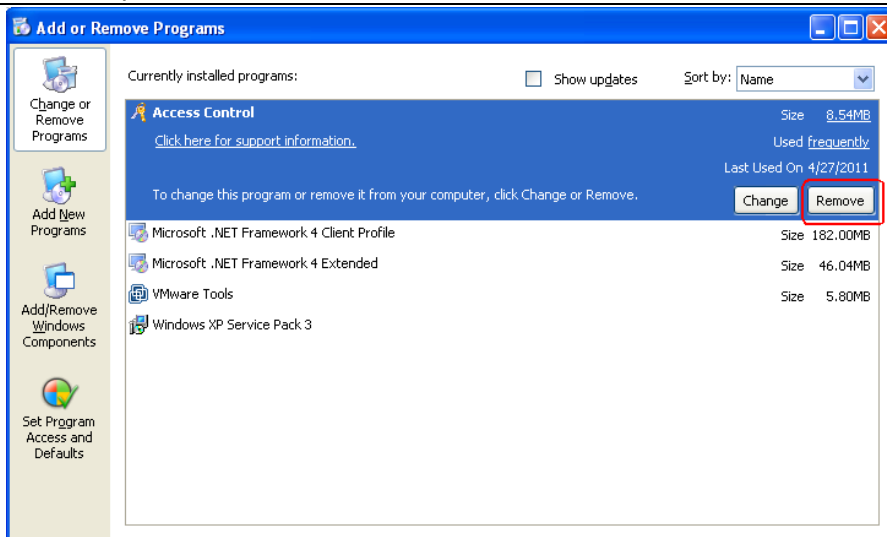

Find software “Access Control” in “Currently installed programs”, Click “Remove”.

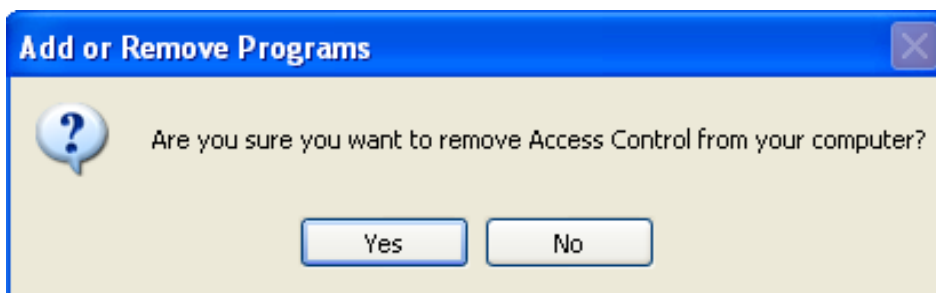


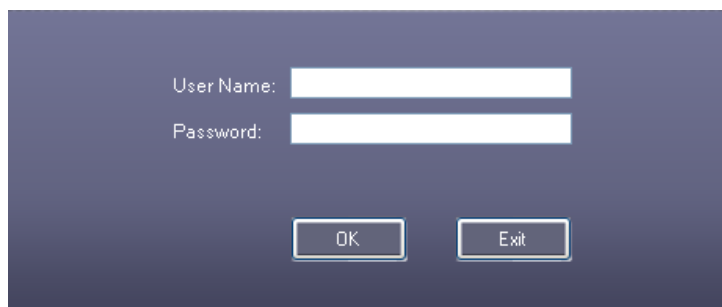
Click “Yes”

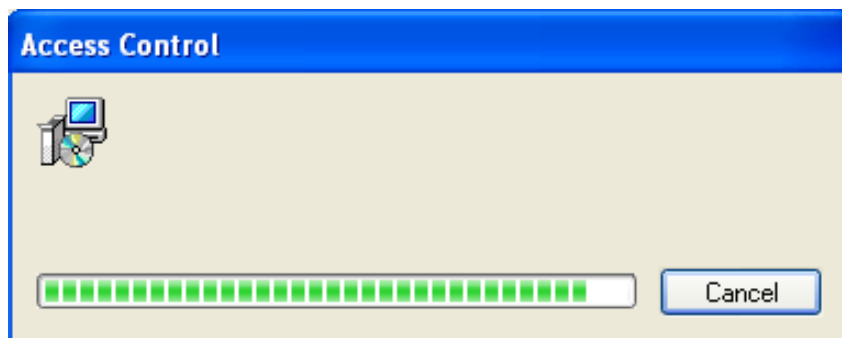

## Part 2: Basic Operation of Software

### 2.1 Login


Click the  or run **【start】 > 【Programs】 > 【Access Control】 > 【Access Control】** ,it will open up the Login windows as follows:



The default user name is “ abc ”, the password is “123”.


It is recommended to change the user name and password at the first use.

If the SQL Server connection fails, there will appear a dialog box as follows:

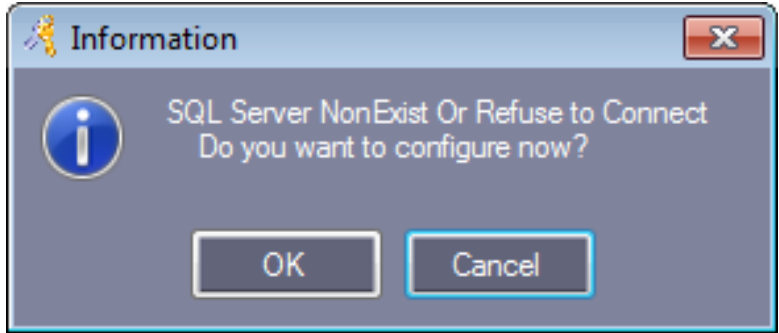

Click “OK”, Please consult the Appendix [5.2 SQL Server Configuration](#).


After login, it will show the main windows as follows:

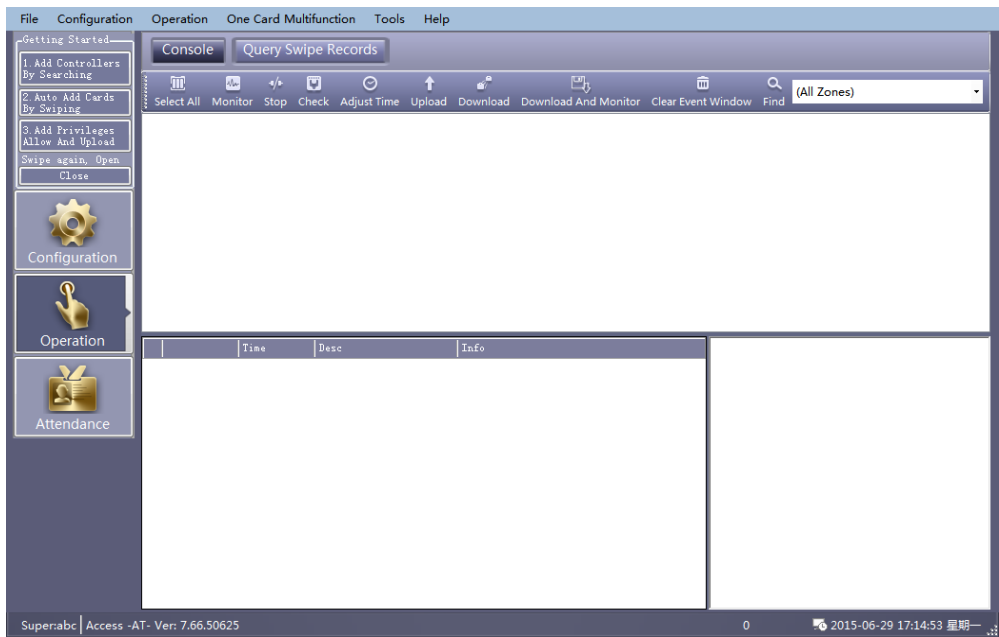


## 2.2 Parameter Settings of Equipment

### 2.2.1 Add/Set up Controller

Click **【Configuration】** > **【Controllers】** from the menu bar

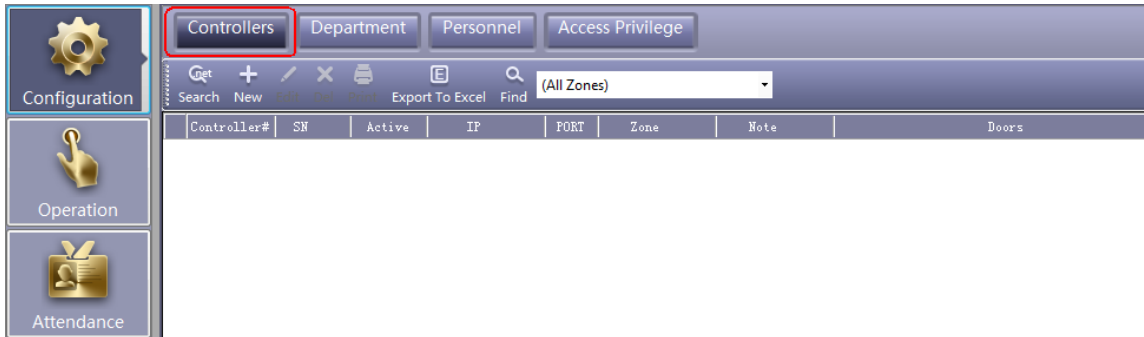

Click the **New** to add the controllers into system.

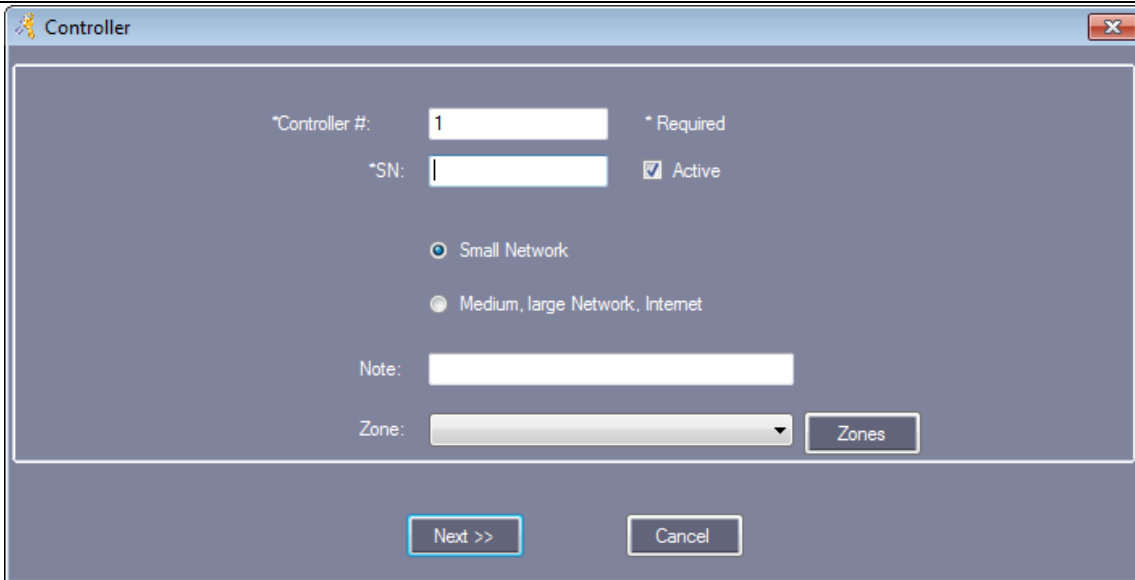


\*Controller # (namely each controller serial number) may check on the label S/N:\*\*\*\*\* of the controller, please fills that nine numerals.

Attention: If the controller S/N which you wrote is not same as the label S/N:\*\*\*\*\* the software can't communicate with the controller.

Small Network: Support TCP/IP communication, all controllers are in the same network segment

Medium, large Network, or Internet: Support TCP/IP communication for different network segment controllers.

Click "Next"

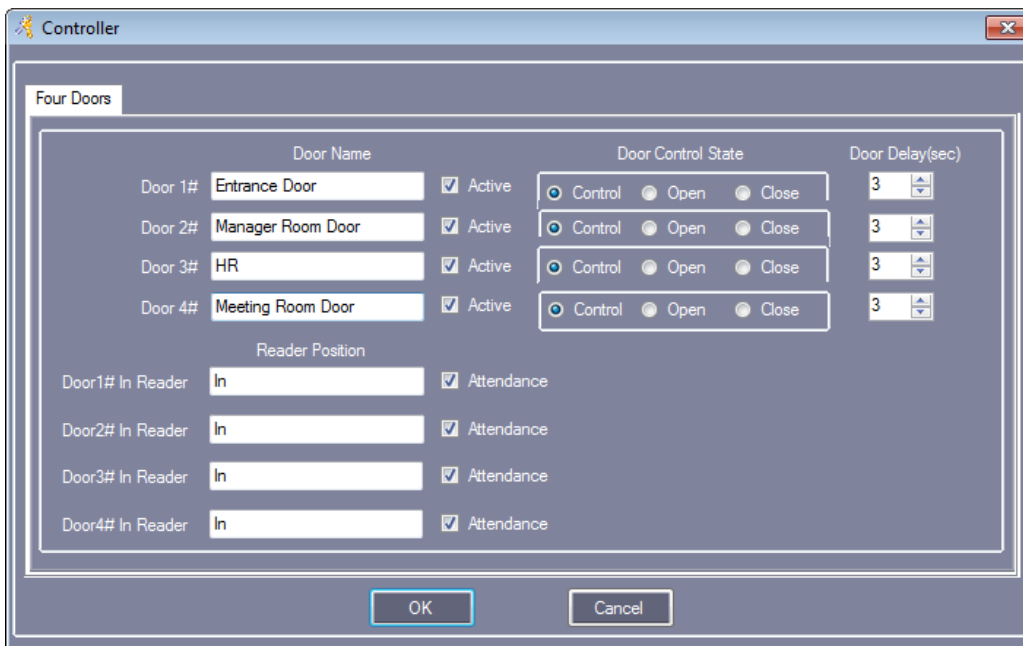


"Door Name" and "Reader Position" can be modified

Mark "Active": by , the console will display the door; otherwise, it won't display.

Mark "Attend": by , the records on the card reader can be used as attendance records; otherwise, it can't.


Click "OK"

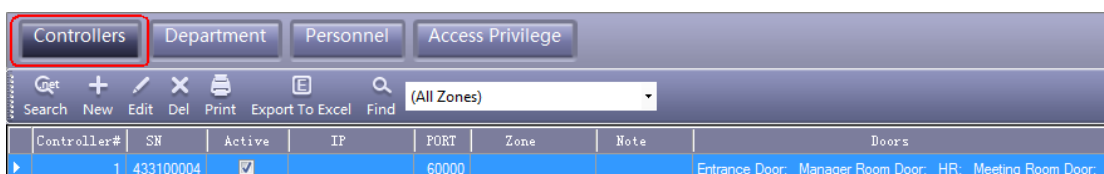




## 2.2.2 IP setting of Controller

Click **【Configuration】 > 【Controllers】 > 【Search】** .

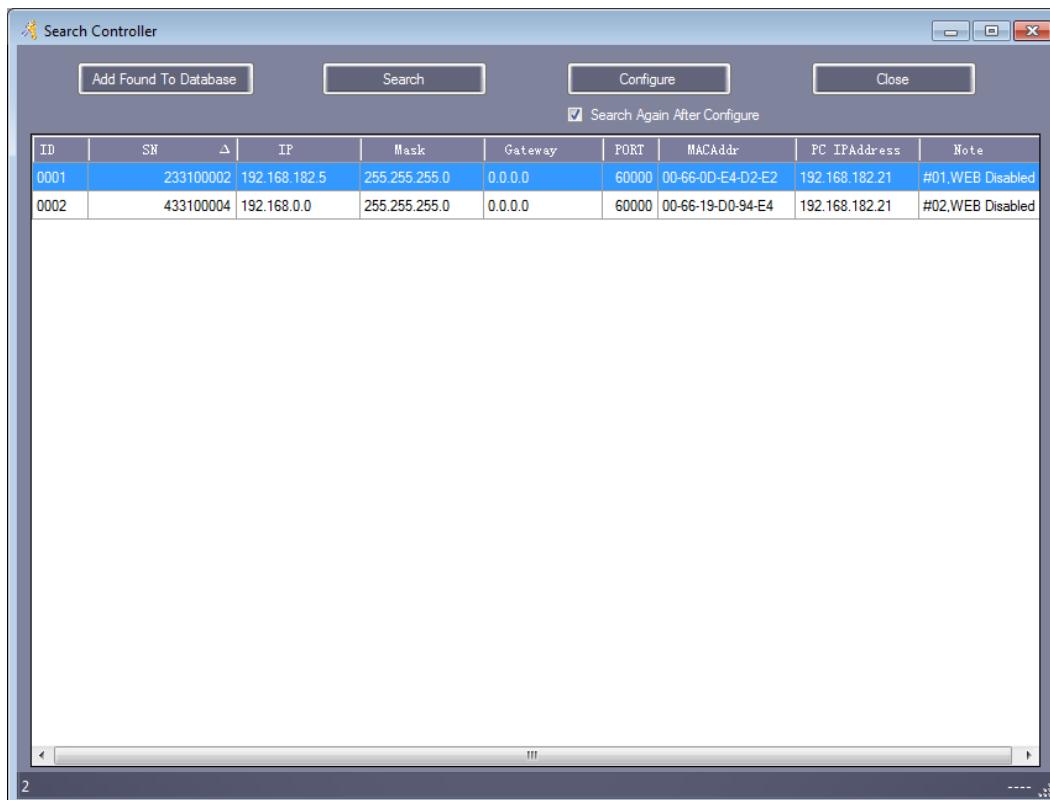


Search need take around 5 Seconds.


Click “Configure”

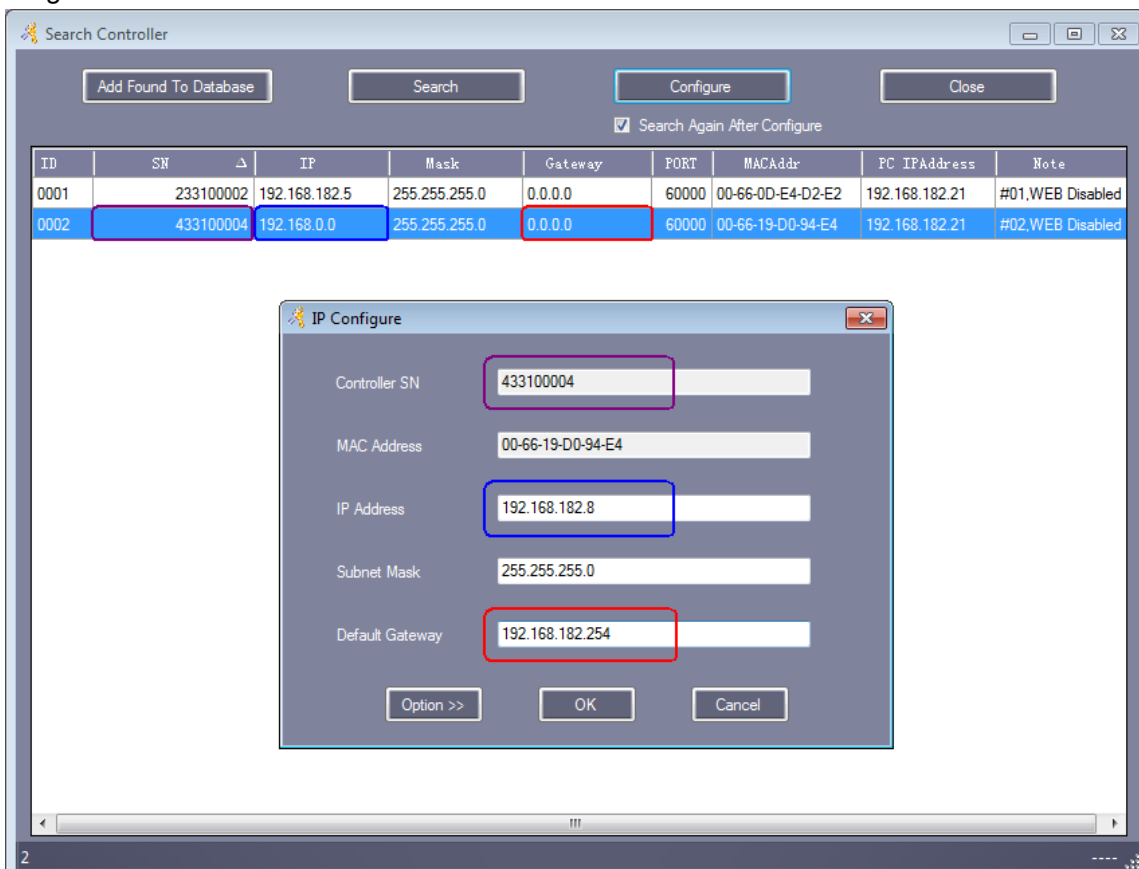


Click "OK"

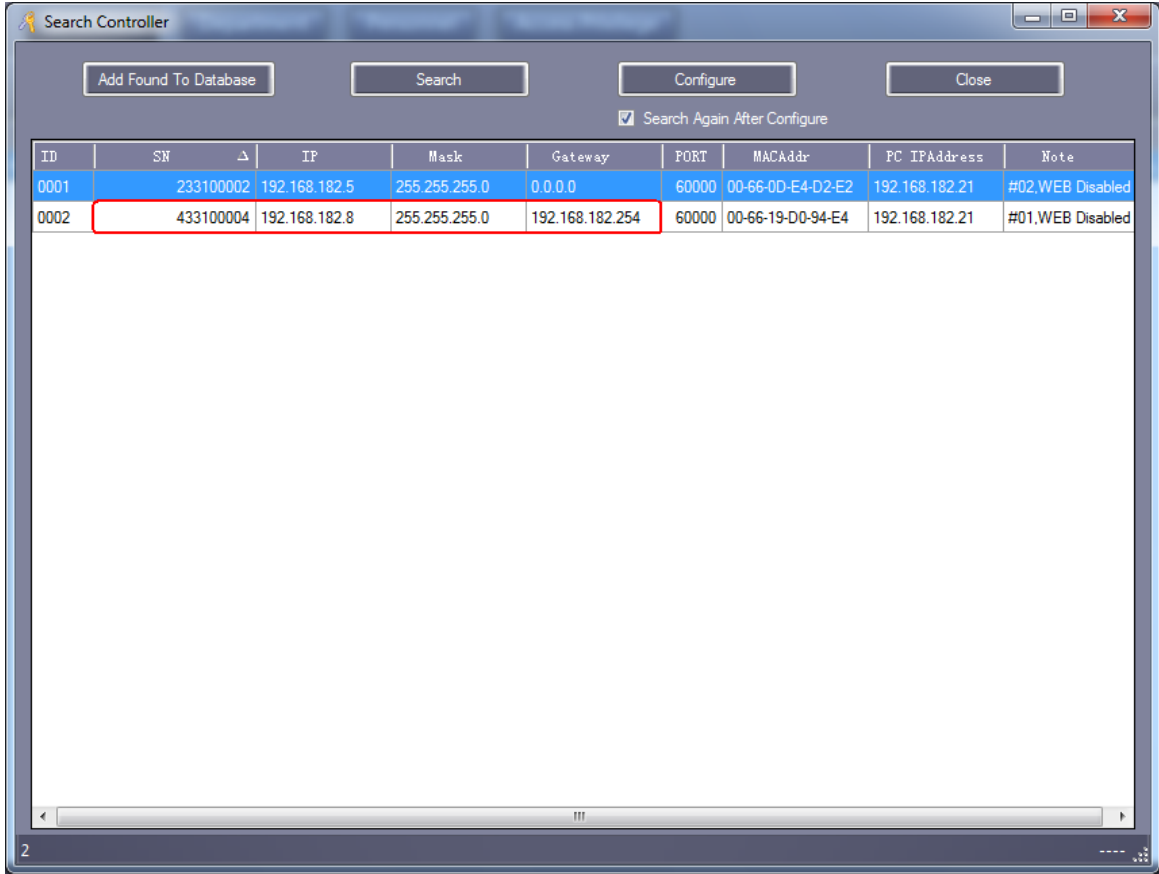

After IP address setting, you can move to chapter [2.2.1 Add/Set up Controller](#) to set the controller parameters, the IP address should be assigned to the corresponding Controller.

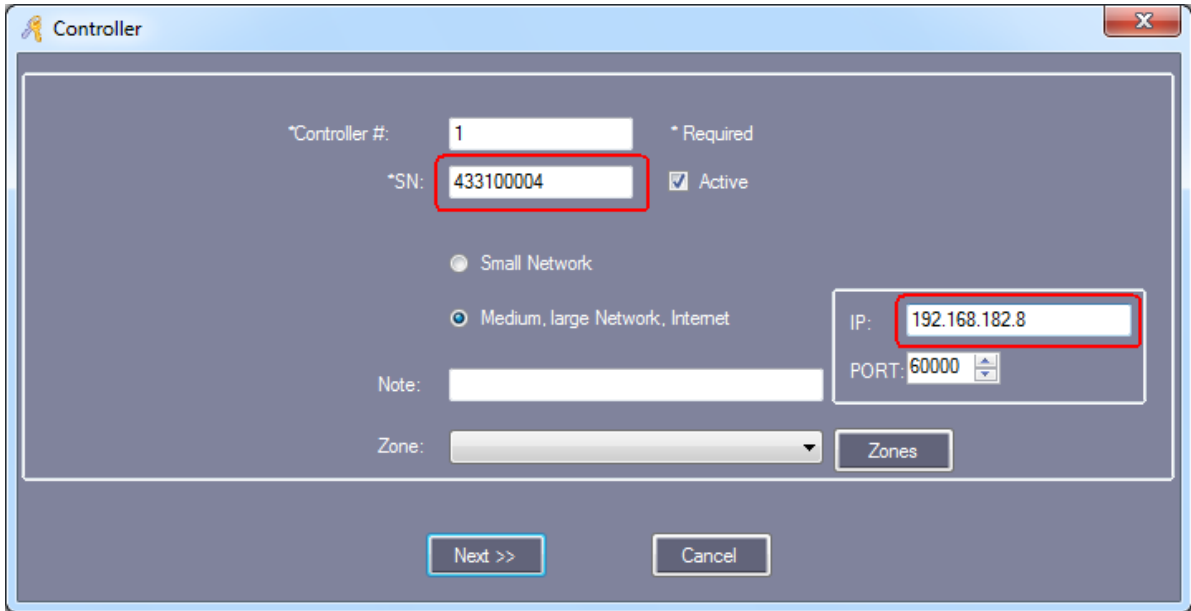


Result, You can see IP address.

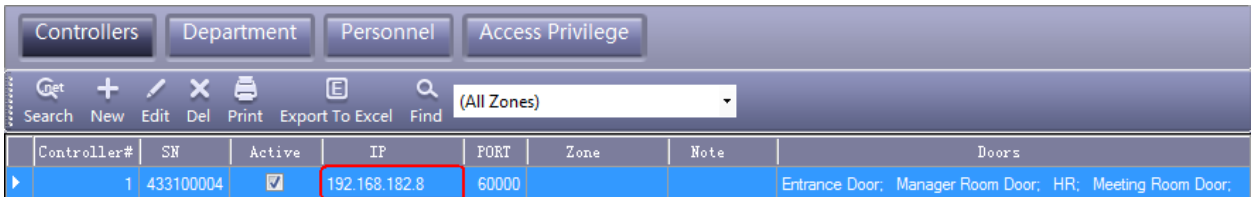


The controllers are separated into different network . Each controller must be assigned a unique IP address .

## 2.2.3 Controller Zone Management


Click **【Configuration】** > **【Zones】**

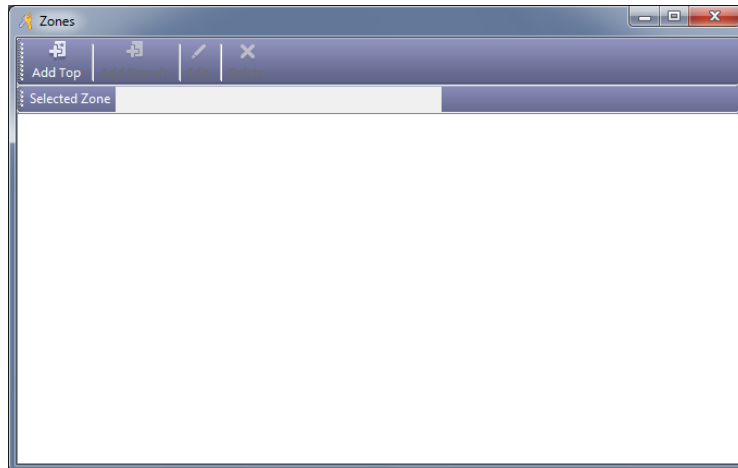


Click “Add Top”

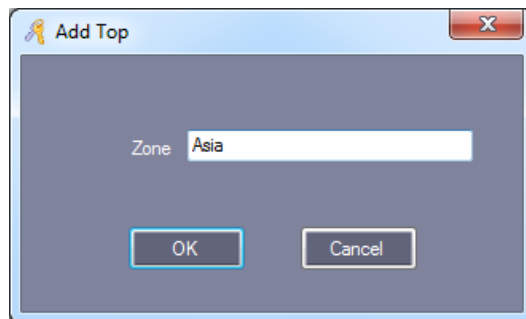


Click “OK”

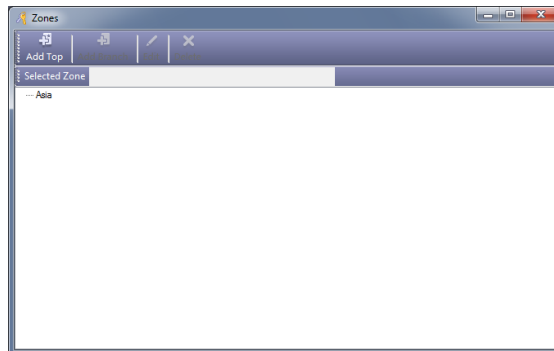


Click the “Add Branch” to add a new Branch under the Top.

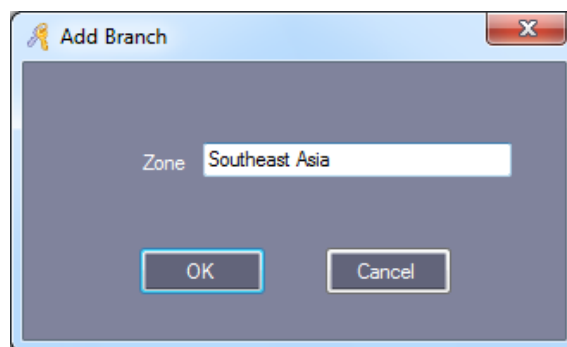

Click “OK”

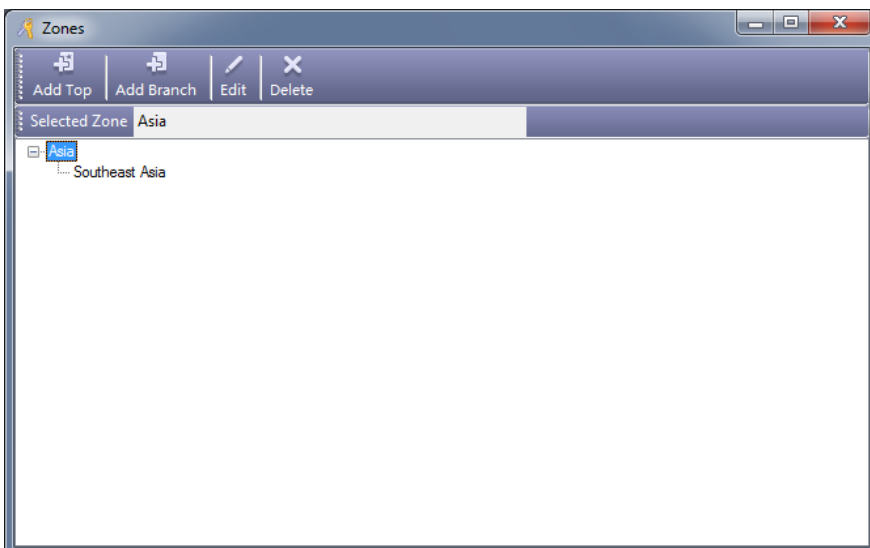


Click , Click **【Configuration】 > 【Controllers】 > 【New】** .

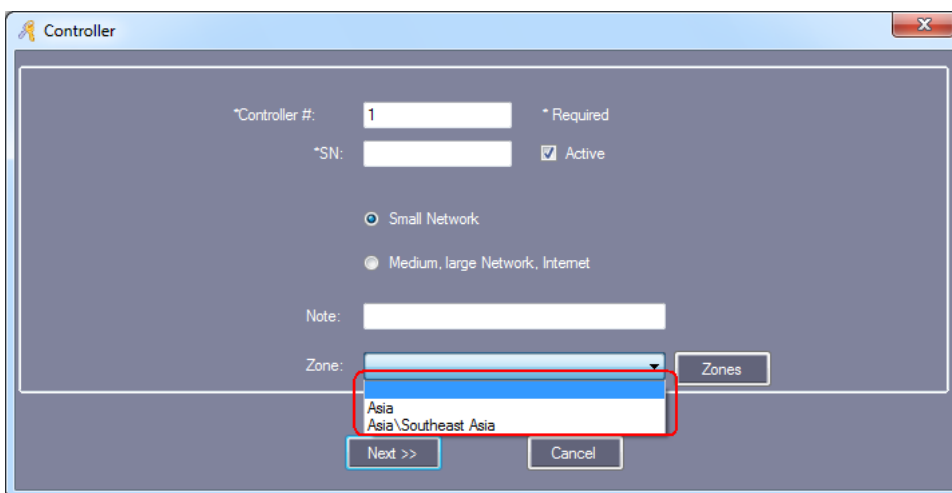


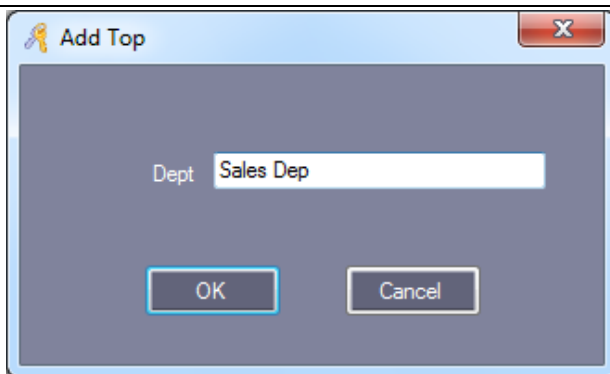
## 2.3 Operation of Department and Registered User

### 2.3.1 Add Department


Click **【Configuration】 > 【Department】** from the menu bar

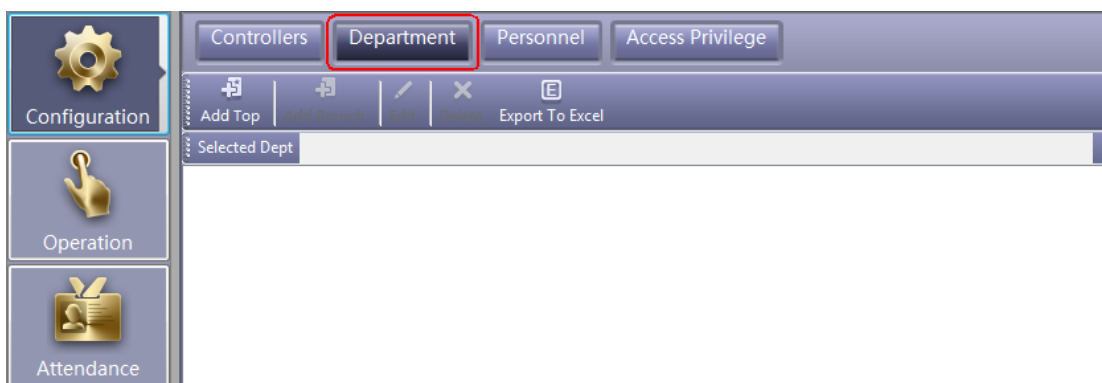


Click the  **Add Top** to create a new department.




Click "OK"

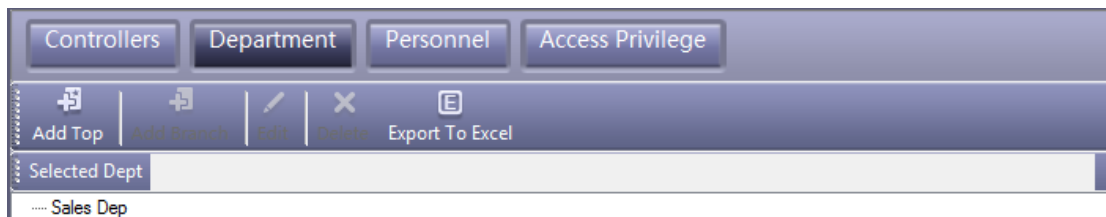

Click the **Add Branch** to add a new Branch under the Top.

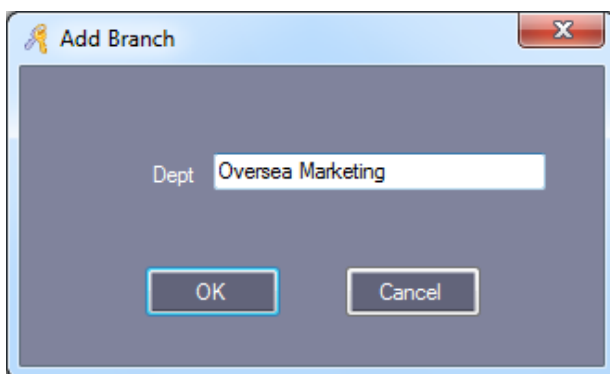


Click "OK"

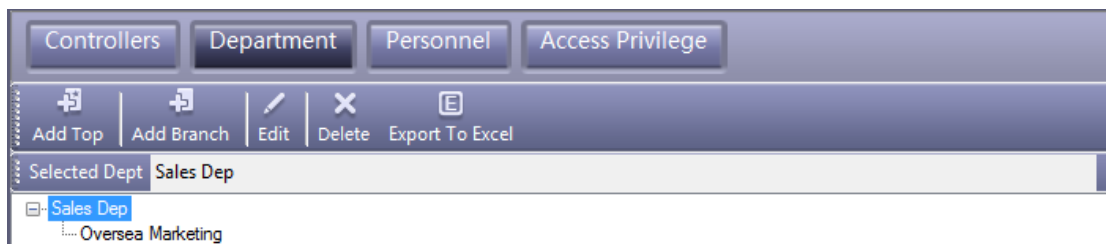


### 2.3.2 Add and Edit a User

Click **Configuration** > **Personnel** from the menu bar

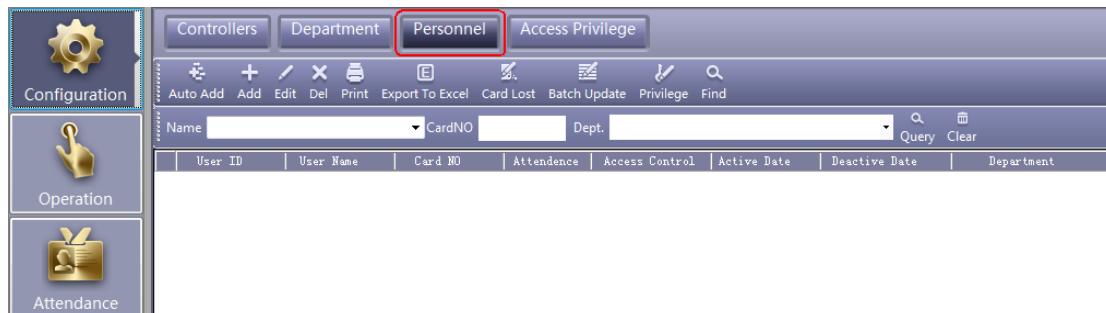

Click "Add" to add users.

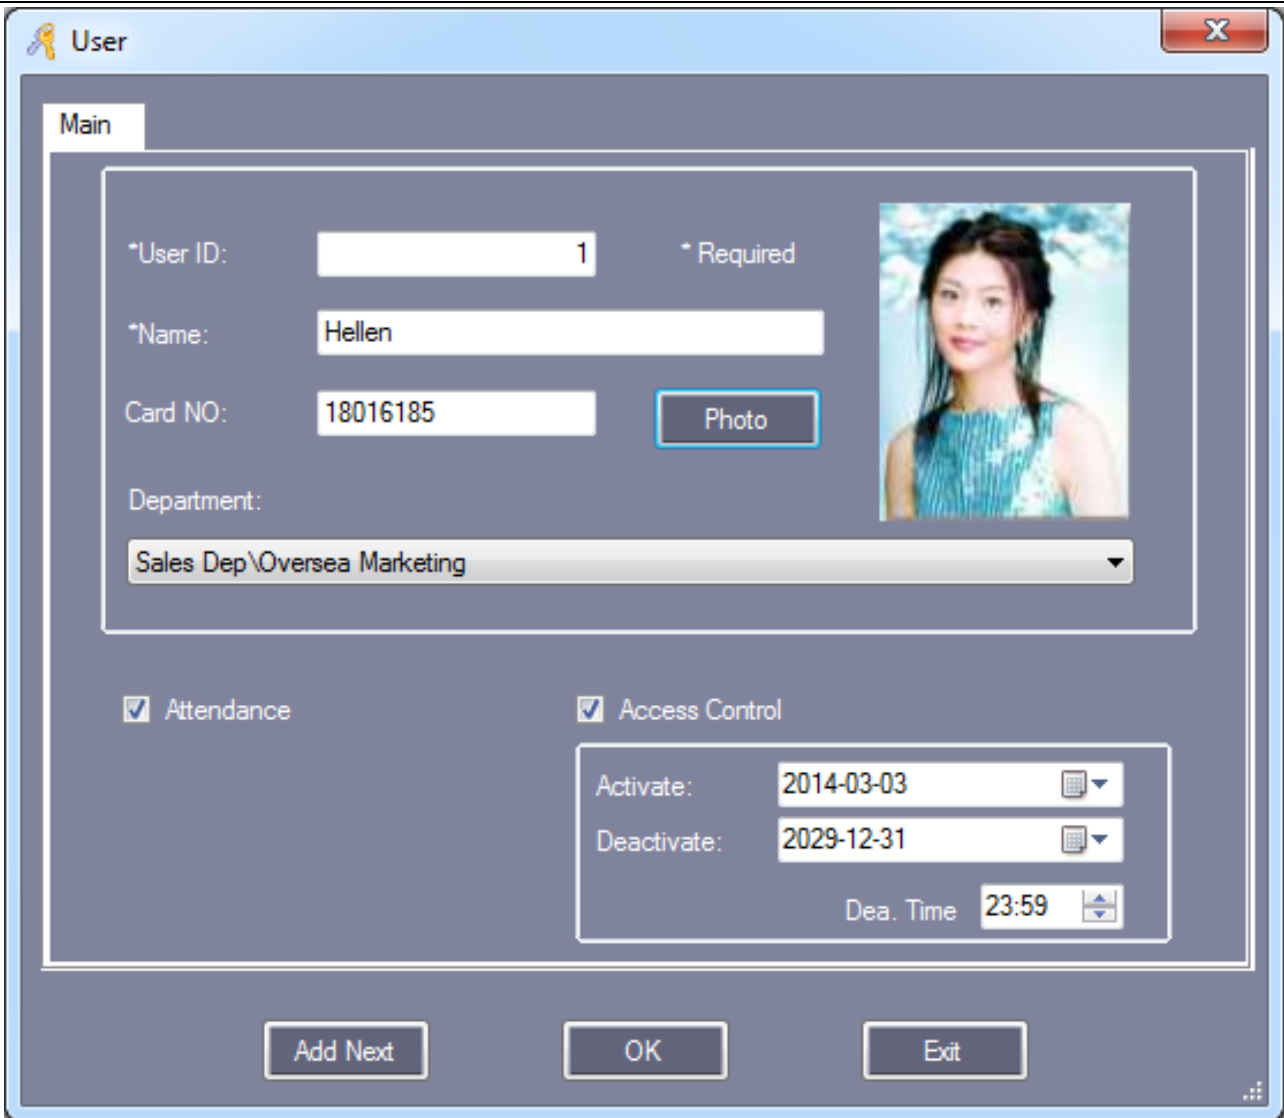

Remark: "User No." and "Name" must be input.


**Add Next** After you input all information of the user, click this button, you complete adding a user to the system, Meanwhile it will remain showing the user windows and wait for you inputing the next user's information.

Add photo, please consult the Appendix [5.1 How to display user's photo at Monitor](#).

Click "OK", This user has been added to the System.


Controllers		Department		Personnel		Access Privilege													
Auto Add		Add		Edit		Del		Print		Export To Excel		Card Lost		Batch Update		Privilege		Find	
Name		CardNO		Dept.		Query		Clear											
User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department												
1	Hellen	18016185	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31	Sales Dep\Oversea Marketing												

User "Others" information

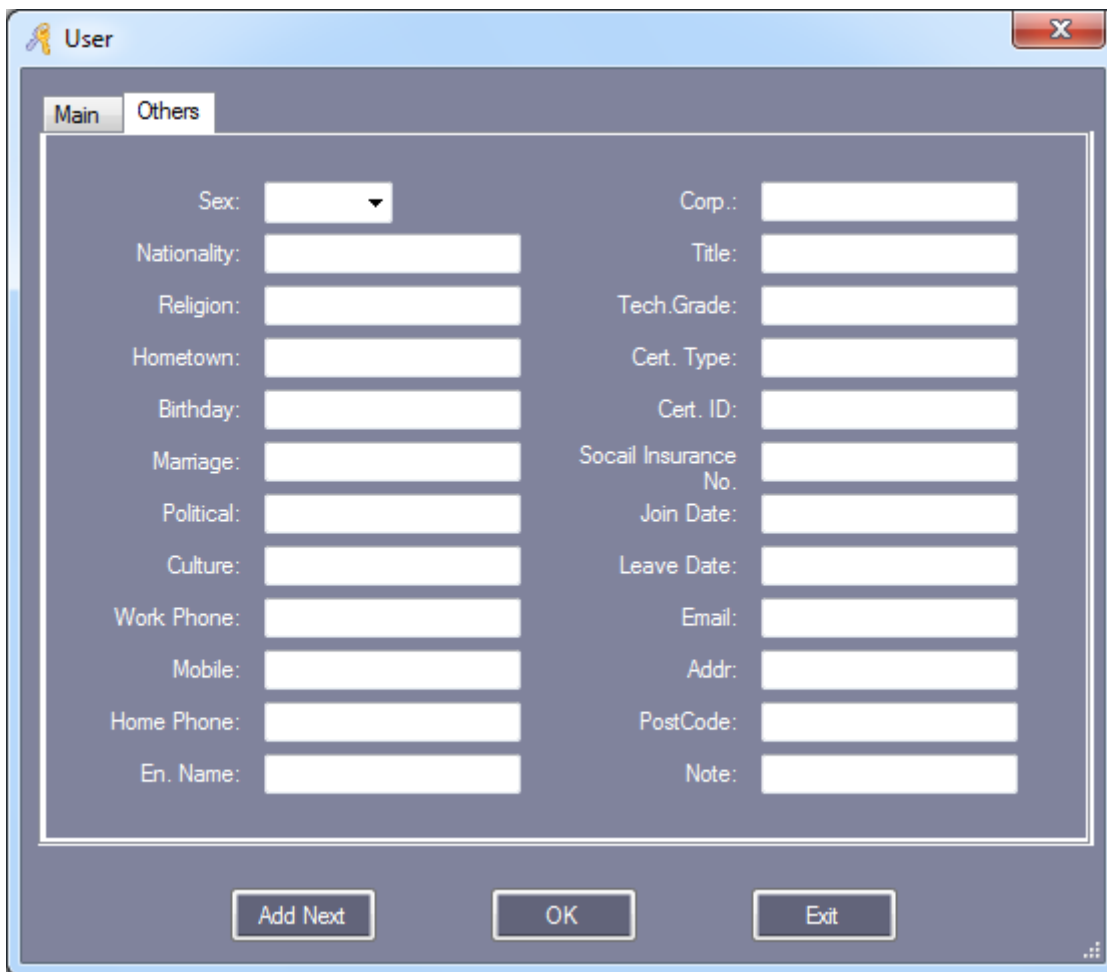


### 2.3.3 Auto Add the registration card


Click **【Configuration】** > **【Personnel】** > **【Auto Add】**

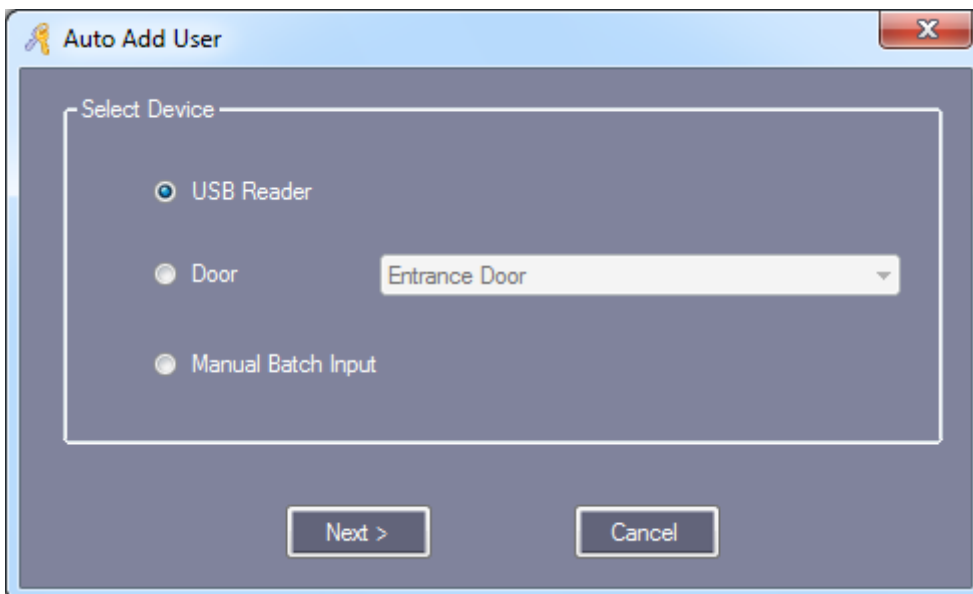

If you selected “USB Reader”, you must connect the USB card reader (The model # for wiegand product is WG1028) with the computer .  
Click “USB Reader” or “Controller”, Click “Next”

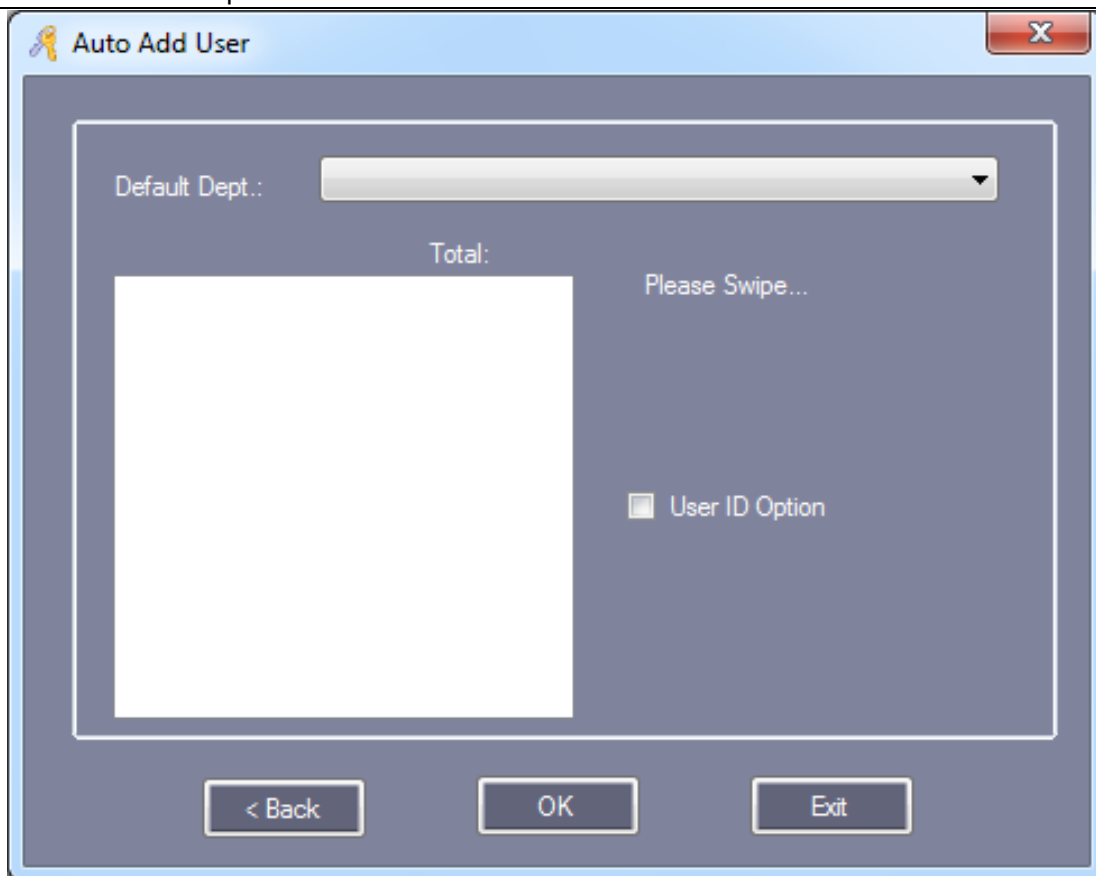


After swiping

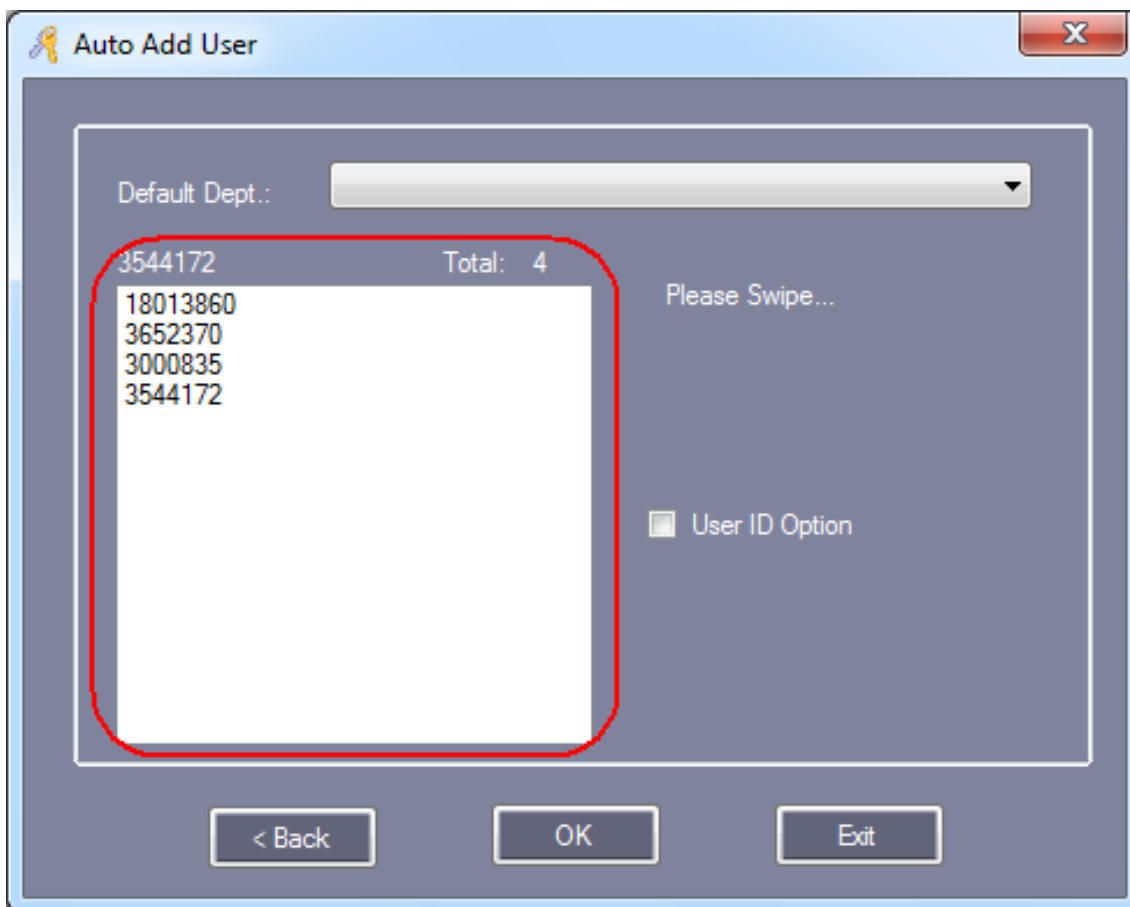


Click "OK", Auto added to the Software.  
Click "Manual Batch Input" ,Click "Next"



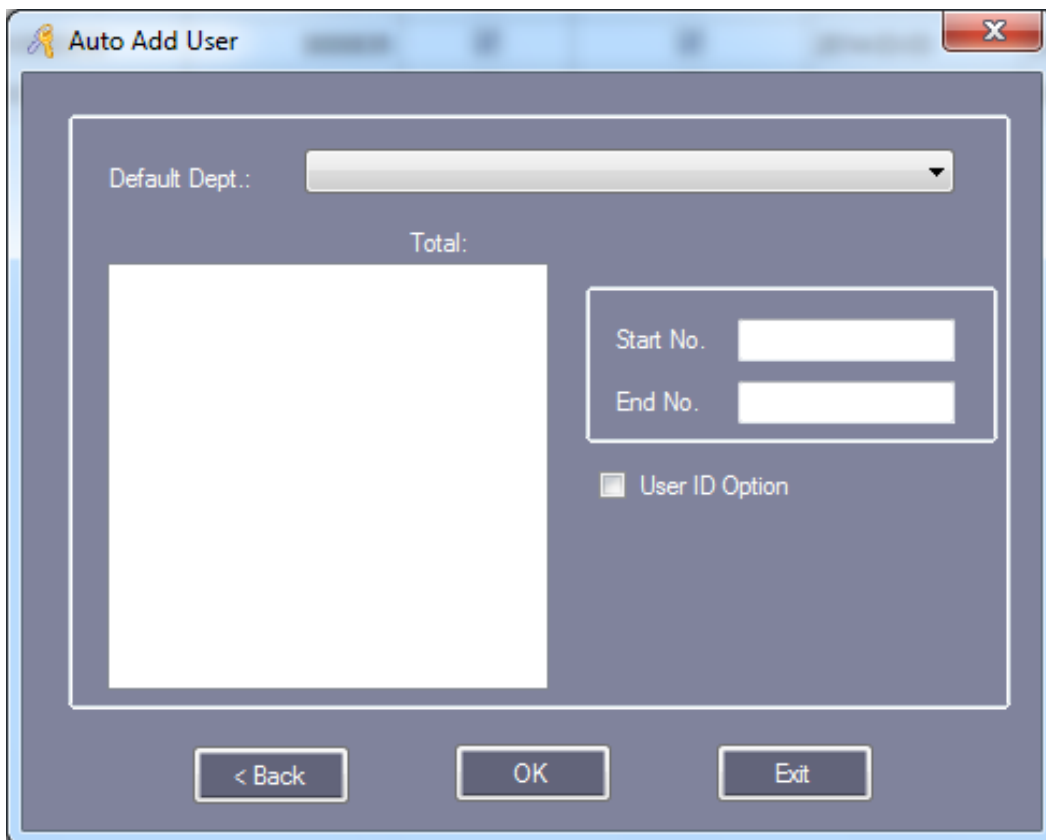

Manual Input "Start NO." and "End NO."

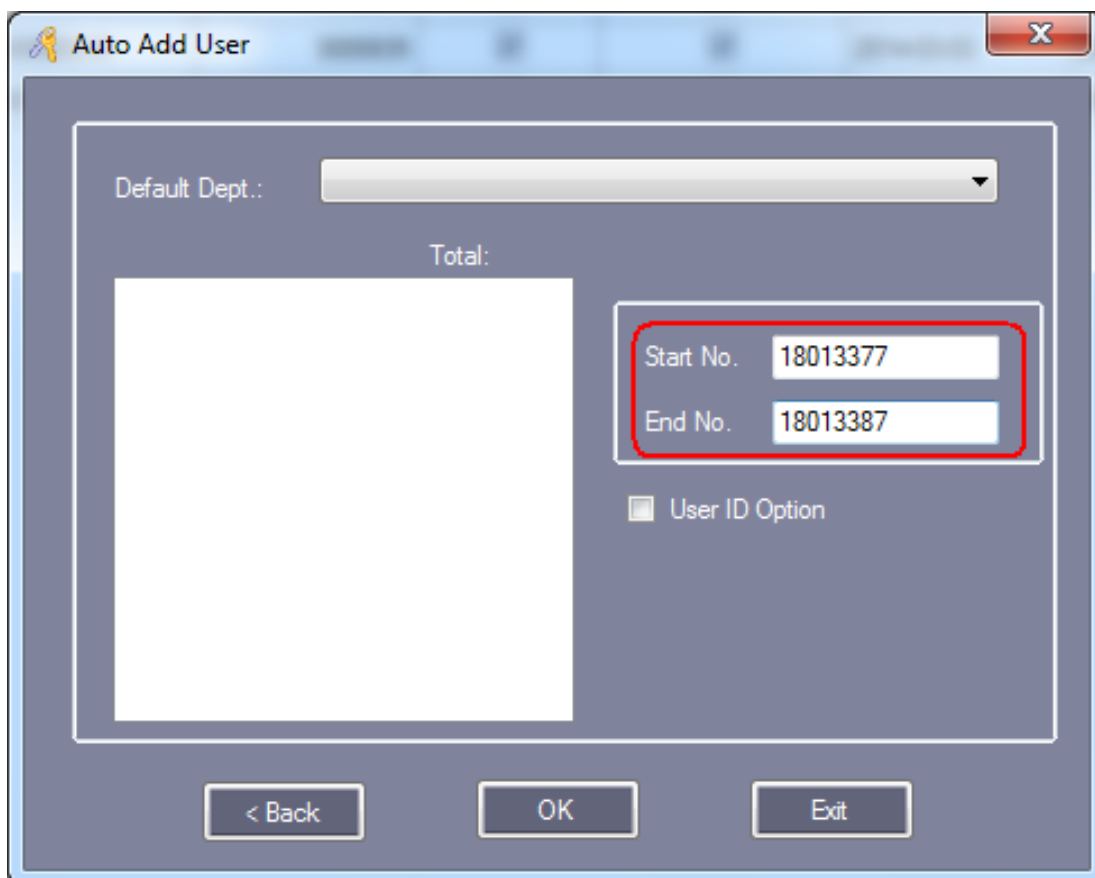

Click "OK", All users card auto added to the Software.

Controllers								Department								Personnel								Access Privilege																																																							
Auto Add								Add								Edit								Del								Print								Export To Excel								Card Lost								Batch Update								Privilege								Find							
Name																CardNO																Dept.																Query				Clear																											
User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department	User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department	User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department	User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department																																																
1	Hellen	18016185	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31	Sales Dep\Oversea Marketing																																																																								
2	N18013860	18013860	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
3	N3652370	3652370	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
4	N3000835	3000835	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
5	N3544172	3544172	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
6	N18013377	18013377	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
7	N18013378	18013378	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
8	N18013379	18013379	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
9	N18013380	18013380	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
10	N18013381	18013381	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
11	N18013382	18013382	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
12	N18013383	18013383	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
13	N18013384	18013384	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
14	N18013385	18013385	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
15	N18013386	18013386	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									
16	N18013387	18013387	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31																																																																									

Attention: Auto add users, Name default is “N + Card Number”

### 2.3.4 Alter Single-user’s Privilege

Please consult the chapter [2.4.1.2 Edit One User’s Privilege](#).

### 2.3.5 Card Lost

If someone has lost his card, he must register the lost card, and then redistributes a new card to him .The steps as follows:


Click **【Configuration】 > 【Personnel】 > 【Card Lost】**

Input “New Card ID” :20806866

Click “OK”

If the user card has privilege, after report the loss, Meanwhile upload to the controller.

If the controller communication failure, display information “Upload Failed. Please upload on the Console, Show as follows:

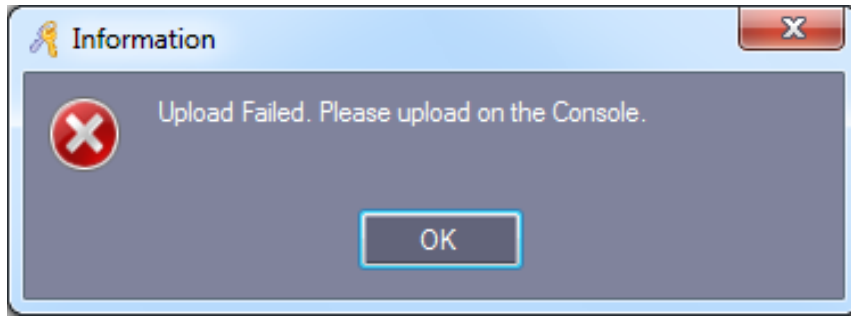


## 2.4 Operation


### 2.4.1 Privilege Management

#### 2.4.1.1 Access Privilege

Click **【Configuration】** > **【Access Privilege】** from the menu bar or shortcut.

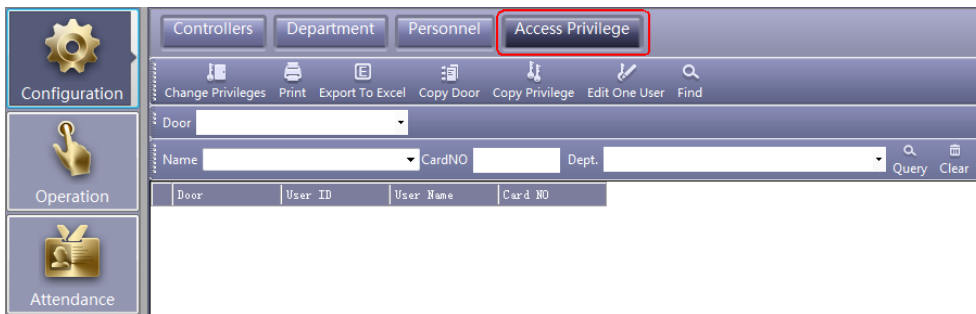

Click  Change Privileges

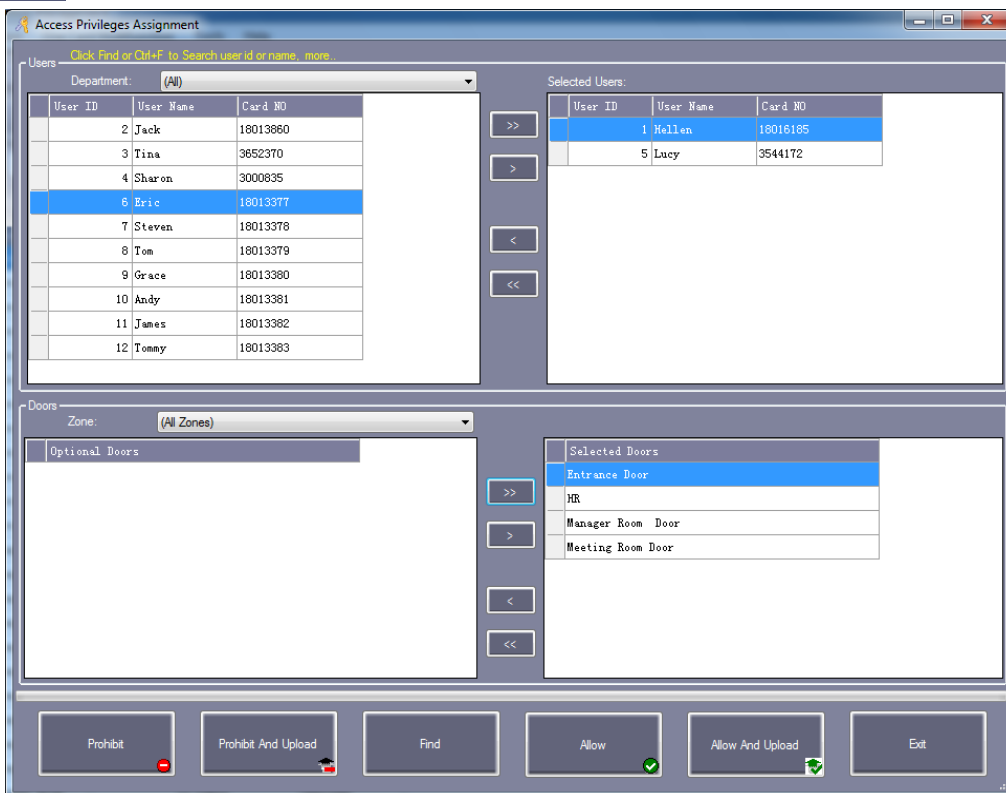


">>":Select all "Users" or all "Optional Doors"


">":Select one "Users" or one "Optional Doors".

"<": Cancel one "Selected Users" or one "Selected Doors".


"<<":Cancel all "Selected Users" or all "Selected Doors".




After clicking this button, and then **Operation -> Upload**, the selected users can pass through the selected doors.



After clicking this button, the selected users can pass through the selected doors.



After clicking this button, and then **Operation -> Upload**, the selected users can't pass through the selected doors.



After clicking this button, the selected users can't pass through the selected doors.

Door	User ID	User Name	Card NO
Entrance Door	1	Hellen	18016185
Manager Room Door	1	Hellen	18016185
HR	1	Hellen	18016185
Meeting Room Door	1	Hellen	18016185
Entrance Door	5	Lucy	3544172
Manager Room Door	5	Lucy	3544172
HR	5	Lucy	3544172
Meeting Room Door	5	Lucy	3544172


After adding all privileges into the system, you must go to the **Operation << Upload** the operation, please consult (Chapter [2.5.2 Upload Setting](#)).

### 2.4.1.2 Edit One User's Privilege

- ">>": Select all "Optional Doors"
- ">": Select one "Optional Doors"
- "<": Cancel one "Selected Doors"
- "<<": Cancel all "Selected Doors"




If you add "Optional Doors" or cancel "Selected Doors", Click this button, and Upload to the controller, you can pass through "Selected Doors".

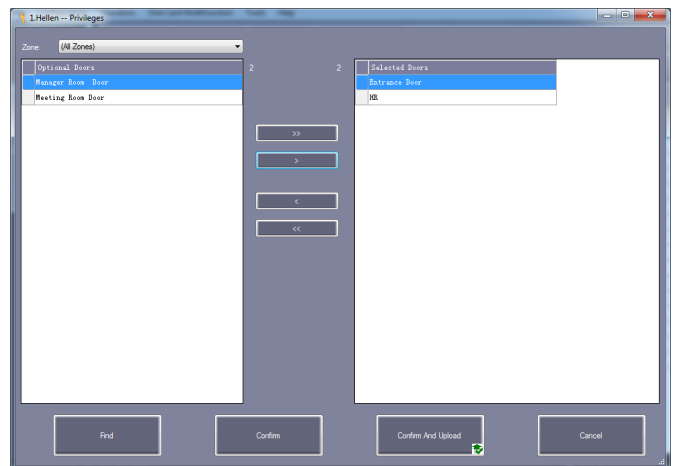


## 2.5 Console

Click **【Operation】 > 【Console】** from the menu bar .The console window contains many basic operations. For example, "Monitor", "Check", "Adjust Time", "Upload", " Download" and "Download And Monitor".

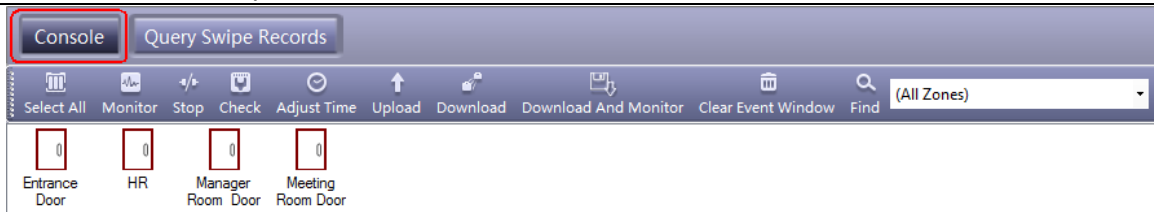


### 2.5.1 Controller's Info Check

Click **【Operation】 > 【Console】 > 【Check】** from the menu bar.

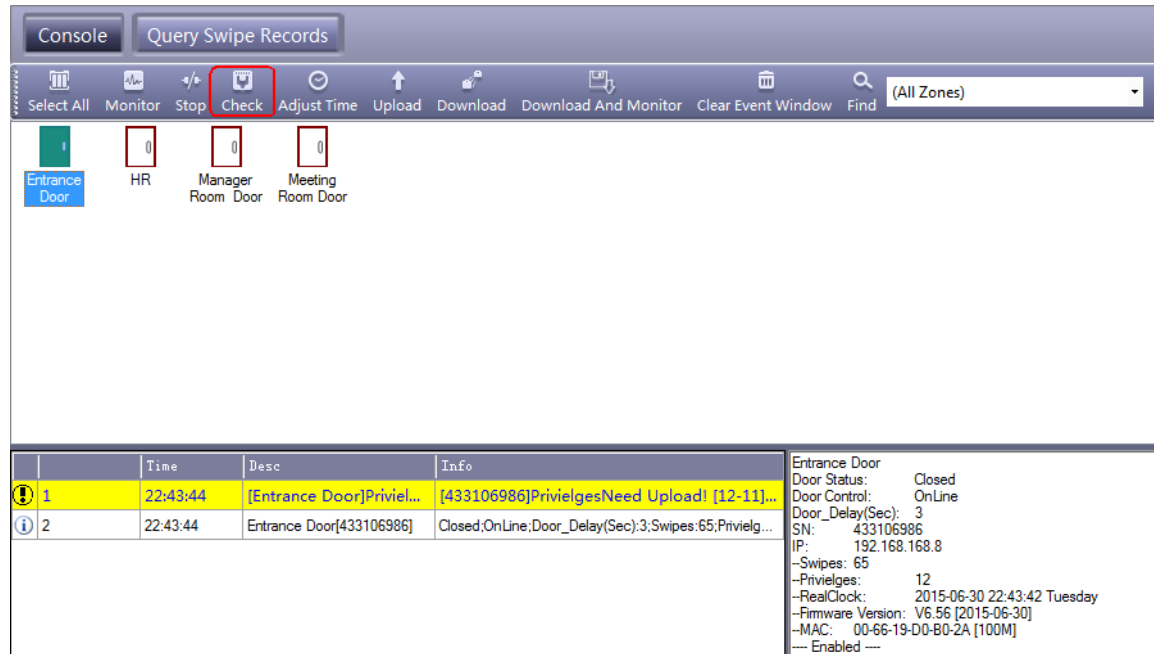


It will show the controller's basic information .such as the amount of swipings and privileges, Door status, control status, open delay (sec) .If the controller is well communicated with computer, the door label's color is green , otherwise the color is red.

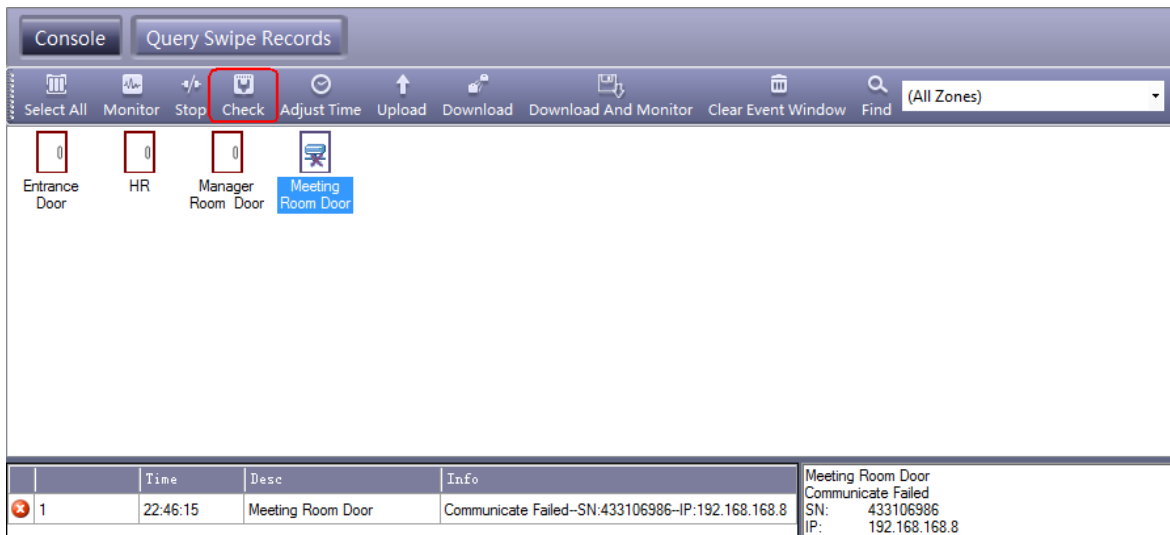


### 2.5.2 Upload Setting

Click **【Operation】 > 【Console】 > 【Upload】** from the menu bar.

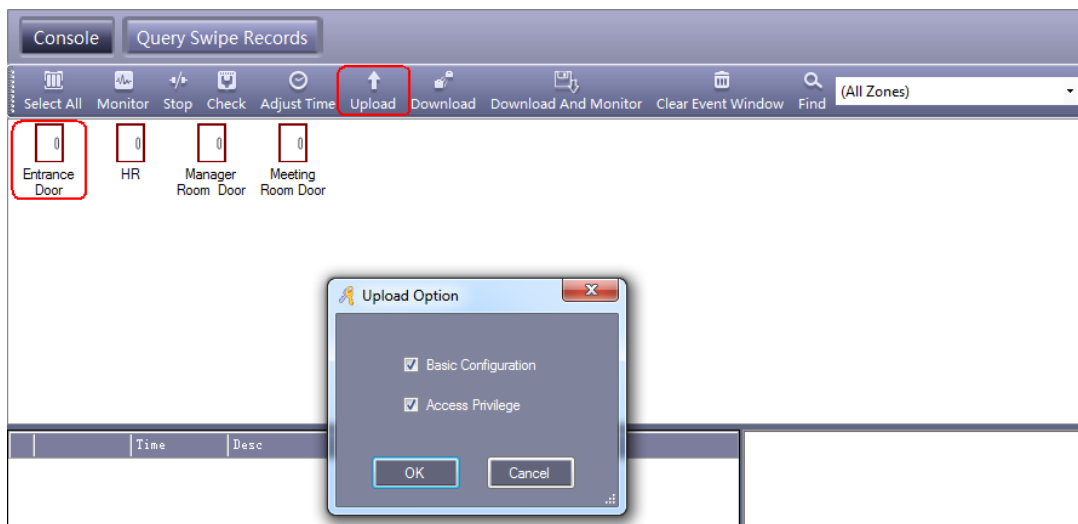


Click “OK”

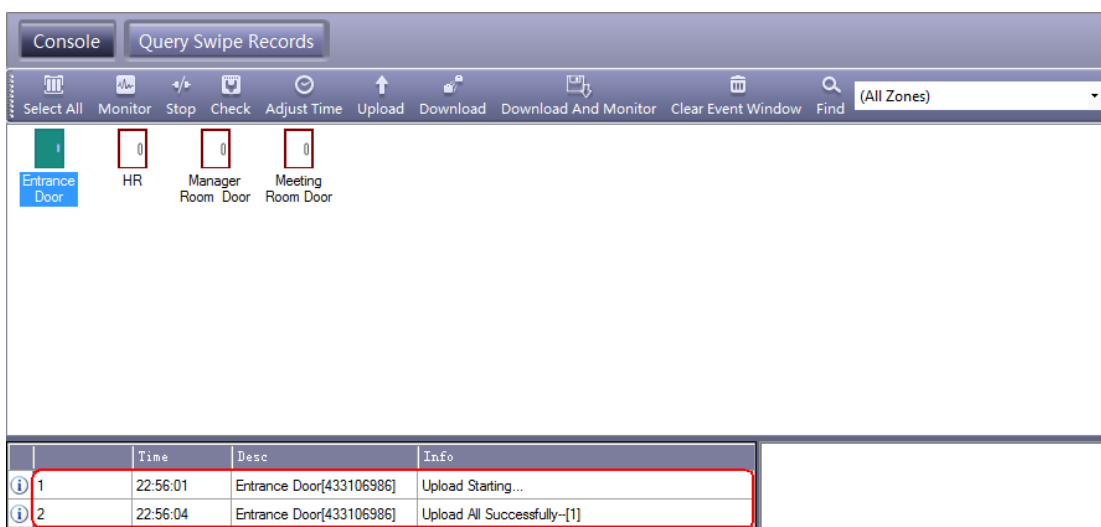

If you update the controllers configuration such as privileges or door-delay etc., you must upload to the controllers.


### 2.5.3 Monitor

Click **【Operation】** > **【Console】** > **【Monitor】** from the menu bar

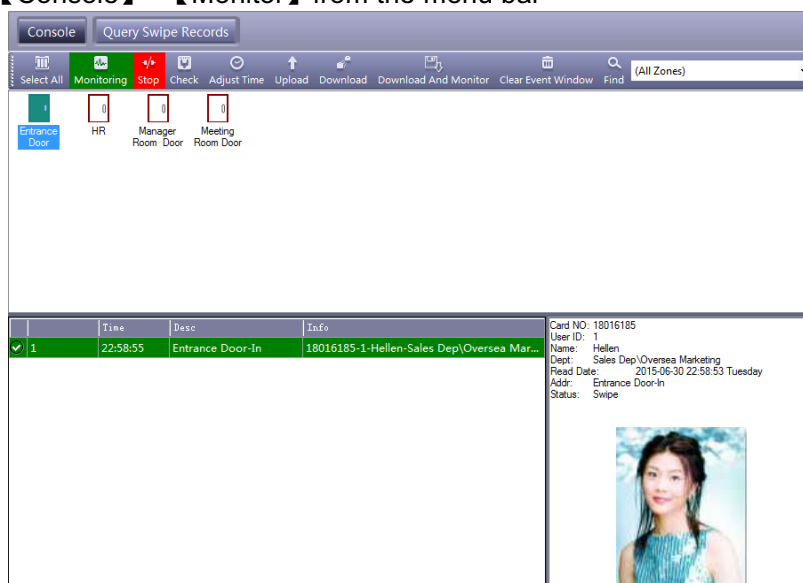

## 2.5.4 Display More Swipes

Only display swipe card records.

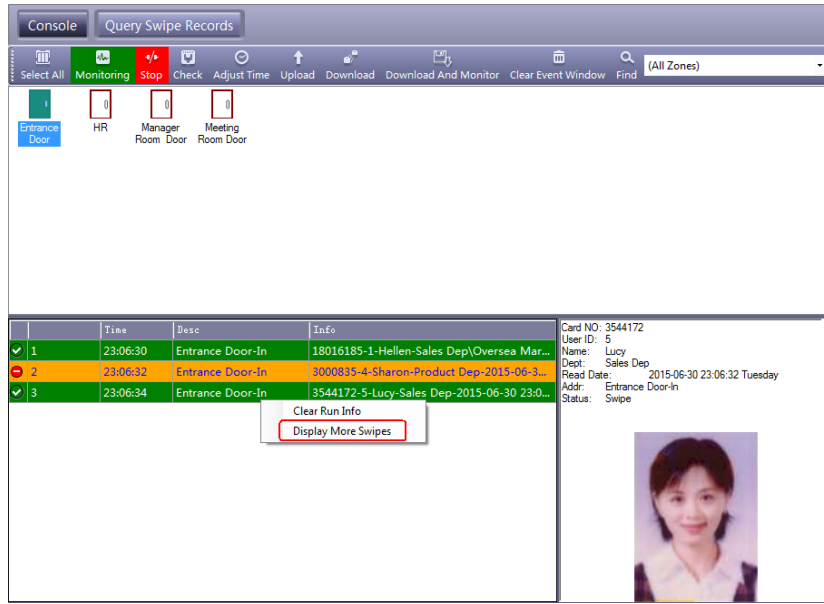

Right click card records, select "Display More Swipes".




Right click "Photo". You can adjust the display of information.



## 2.5.5 Getting Swipe Records

Click **【Operation】 > 【Console】 > 【Download】** from the menu bar.

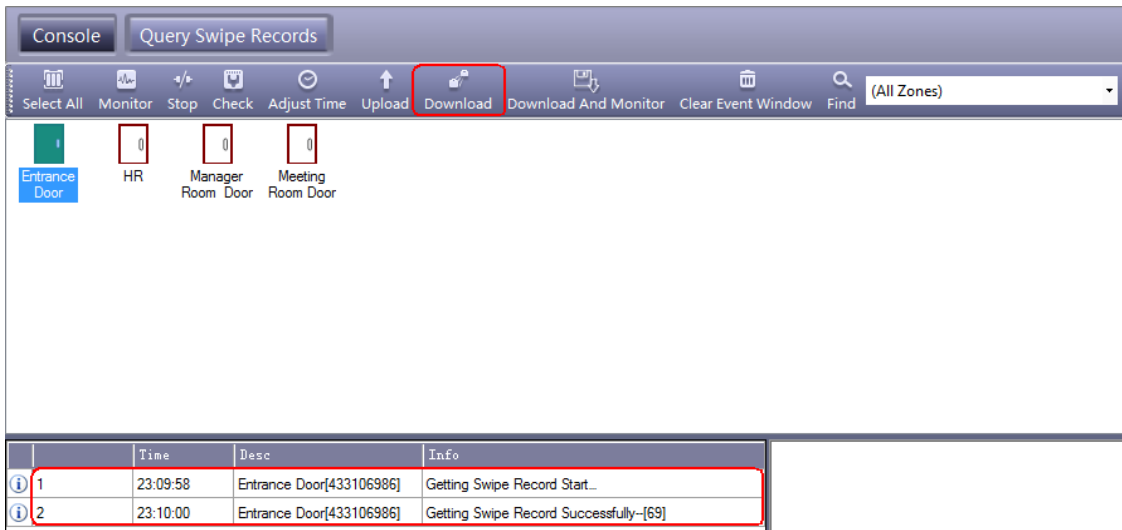


**Download:** Collect the controller's records to database.

## 2.6 Records Query


Please "Download" Records and then query.

Click **【Operation】 > 【Query Swipe Records】** from the menu bar

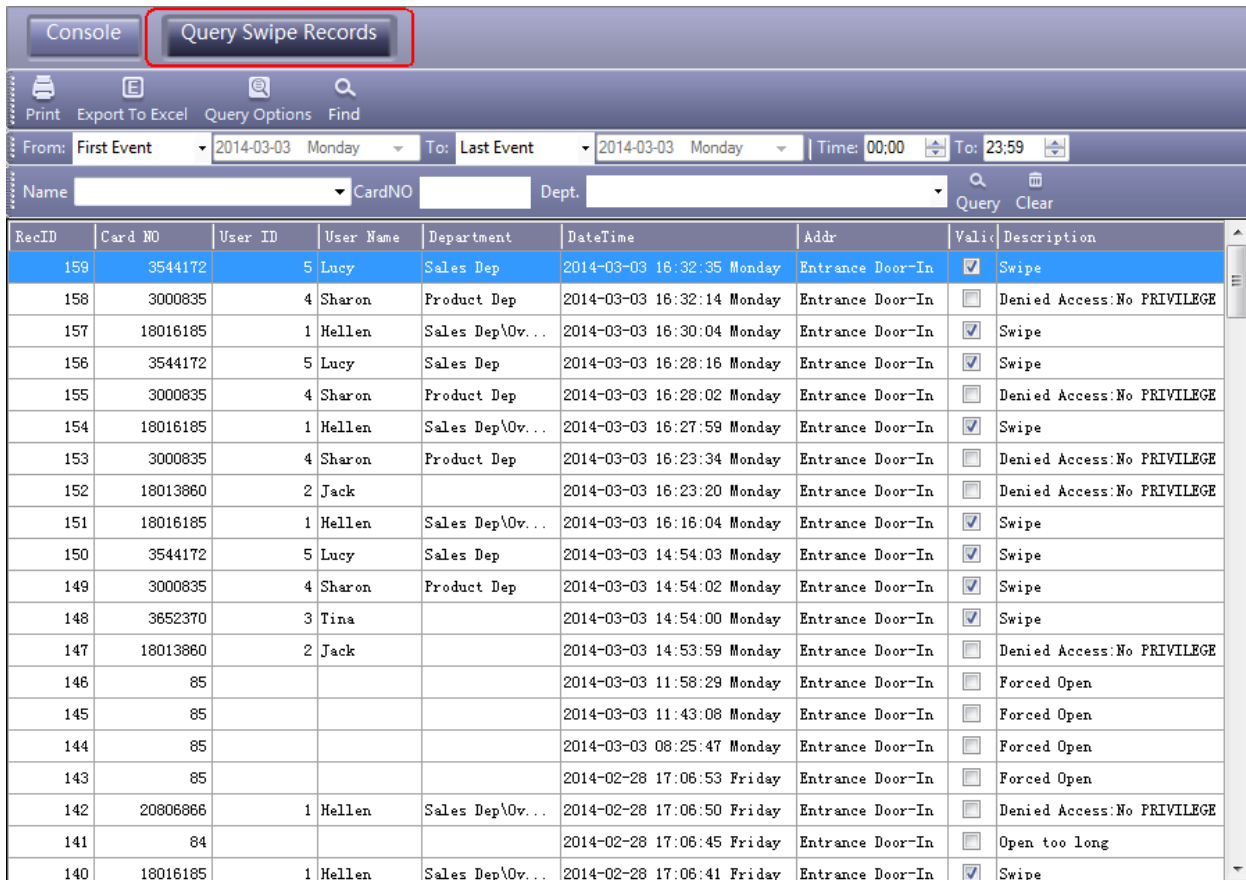

If you want to query by "Addr", Click "Query Option"



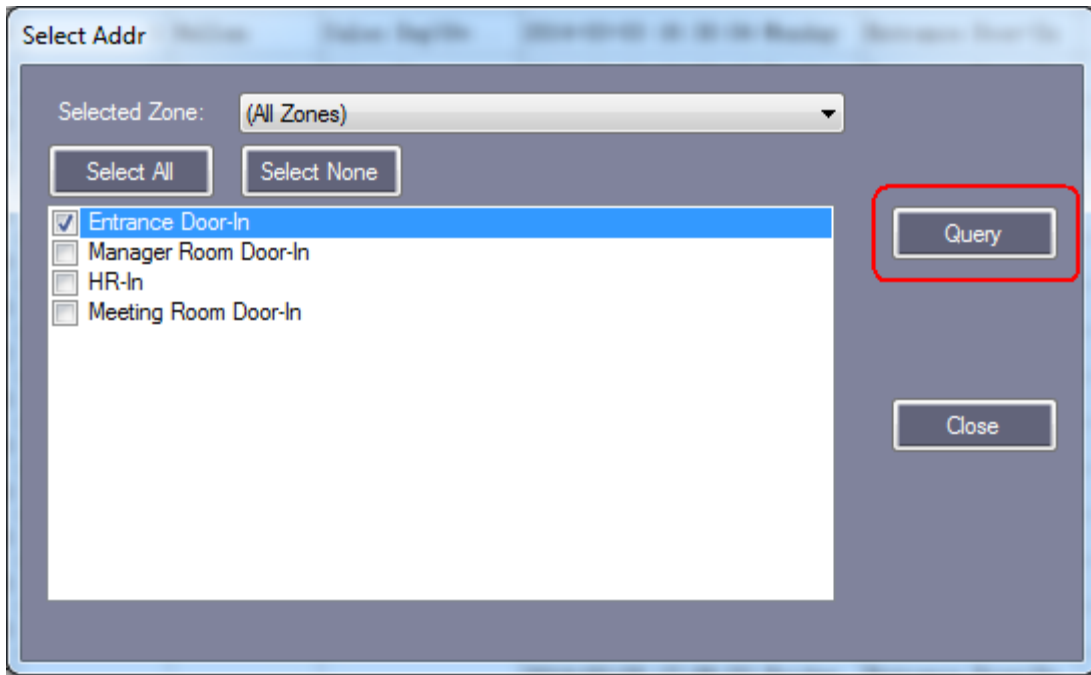

Query result as follows:


RecID	Card NO	User ID	User Name	Department	DateTime	Addr	Valid	Description
159	3544172	5	Lucy	Sales Dep	2014-03-03 16:32:35 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
158	3000835	4	Sharon	Product Dep	2014-03-03 16:32:14 Monday	Entrance Door-In	<input type="checkbox"/>	Denied Access:No PRIVILEGE
157	18016185	1	Hellen	Sales Dep\Ov...	2014-03-03 16:30:04 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
156	3544172	5	Lucy	Sales Dep	2014-03-03 16:28:16 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
155	3000835	4	Sharon	Product Dep	2014-03-03 16:28:02 Monday	Entrance Door-In	<input type="checkbox"/>	Denied Access:No PRIVILEGE
154	18016185	1	Hellen	Sales Dep\Ov...	2014-03-03 16:27:59 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
153	3000835	4	Sharon	Product Dep	2014-03-03 16:23:34 Monday	Entrance Door-In	<input type="checkbox"/>	Denied Access:No PRIVILEGE
152	18013860	2	Jack		2014-03-03 16:23:20 Monday	Entrance Door-In	<input type="checkbox"/>	Denied Access:No PRIVILEGE
151	18016185	1	Hellen	Sales Dep\Ov...	2014-03-03 16:16:04 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
150	3544172	5	Lucy	Sales Dep	2014-03-03 14:54:03 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
149	3000835	4	Sharon	Product Dep	2014-03-03 14:54:02 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
148	3652370	3	Tina		2014-03-03 14:54:00 Monday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe
147	18013860	2	Jack		2014-03-03 14:53:59 Monday	Entrance Door-In	<input type="checkbox"/>	Denied Access:No PRIVILEGE
146	85				2014-03-03 11:58:29 Monday	Entrance Door-In	<input type="checkbox"/>	Forced Open
145	85				2014-03-03 11:43:08 Monday	Entrance Door-In	<input type="checkbox"/>	Forced Open
144	85				2014-03-03 08:25:47 Monday	Entrance Door-In	<input type="checkbox"/>	Forced Open
143	85				2014-02-28 17:06:53 Friday	Entrance Door-In	<input type="checkbox"/>	Forced Open
142	20806866	1	Hellen	Sales Dep\Ov...	2014-02-28 17:06:50 Friday	Entrance Door-In	<input type="checkbox"/>	Denied Access:No PRIVILEGE
141	84				2014-02-28 17:06:45 Friday	Entrance Door-In	<input type="checkbox"/>	Open too long
140	18016185	1	Hellen	Sales Dep\Ov...	2014-02-28 17:06:41 Friday	Entrance Door-In	<input checked="" type="checkbox"/>	Swipe

## 2.7 Tools

### 2.7.1 Change Password

Change operator and operator's password.


Click **【Tools】** > **【Edit Operator】**

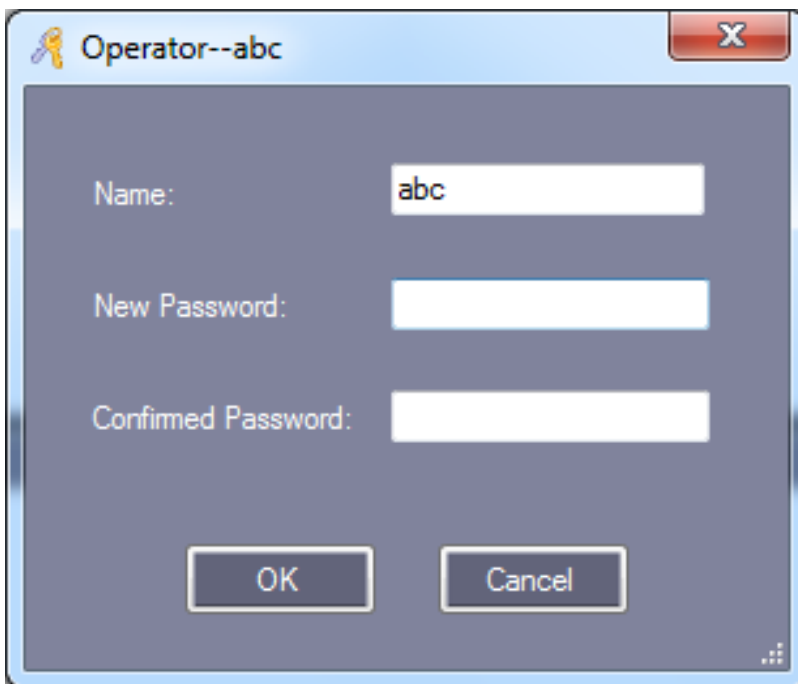


Modify operator Name, input the new name in “Name”.  
Input “New Password” and “Confirm Password” must be the same, After the modify current password, Re-login to take effect.

### 2.7.2 DB Backup

Click **【File】 > 【DB Backup】**

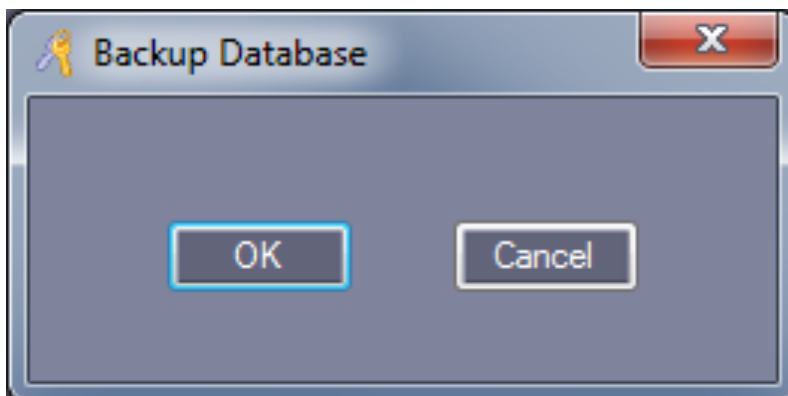


Click “OK”.  
This backup file is saved in software under the default installation path “C:\AccessControl”.  
If Backup is SQL DB.

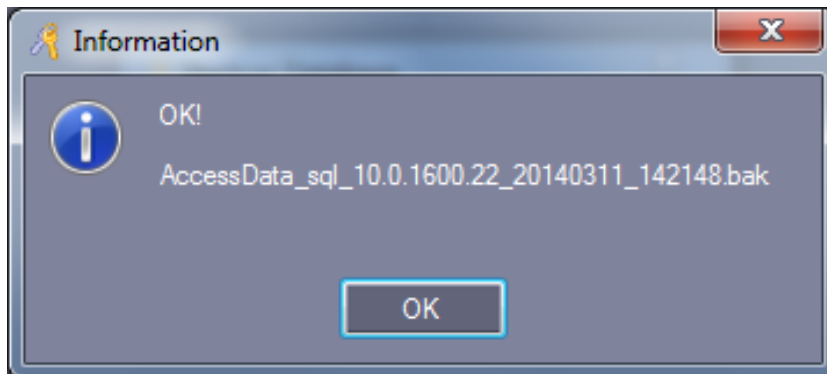


Click “OK”, This backup file is saved in database under the default installation path.  
“C:\Program Files\Microsoft SQL Server\MSSQL10.MSSQLSERVER\MSSQL\Backup”

### 2.7.3 Option

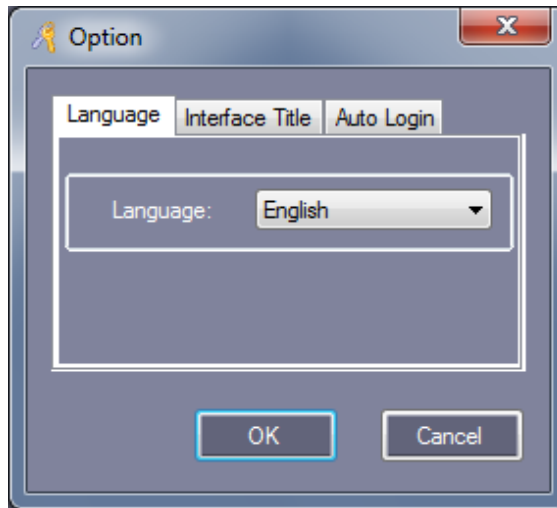


#### 【Language】

Click **【Tools】** > **【Language】** from menu bar.

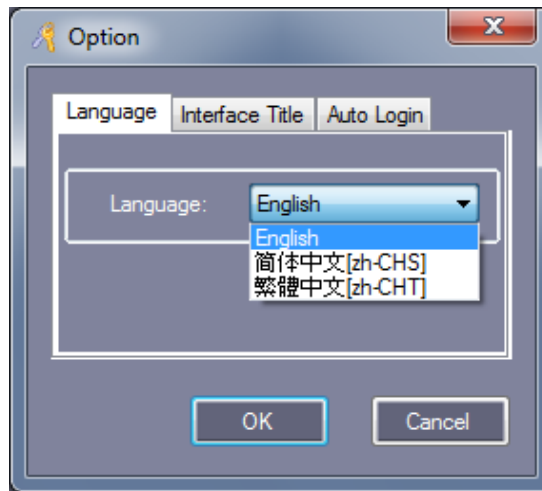

#### 【Interface Title】

Click **【Tools】** > **【Interface Setting】** from menu bar.

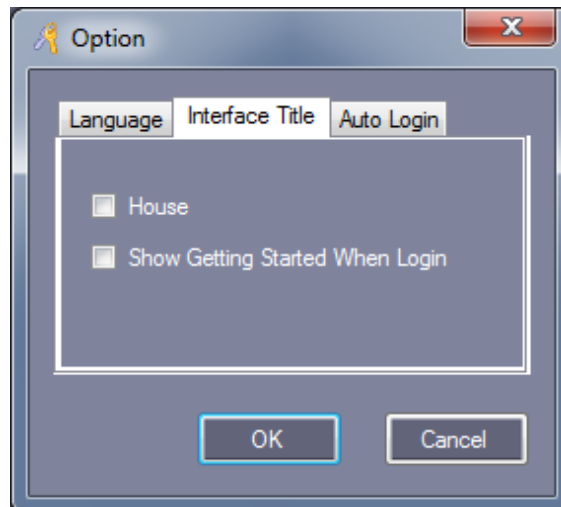


**【House】** : Used in community management.

**【Show Getting Started When Login】** : To guide the operation software.

**【Auto Login】**


Click **【Tools】** > **【Auto Login】** from menu bar.

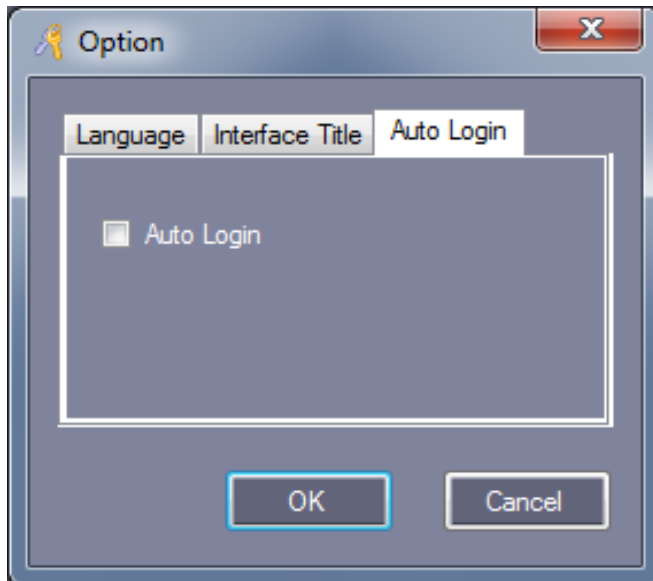

**【Auto Login】** : Select “Auto Login”, In “Login” windows, you don’t need to input “User Name” and “Password”.

### Part 3: Extended Function


Click **【Tools】** > **【Extended Functions】** from the menu bar

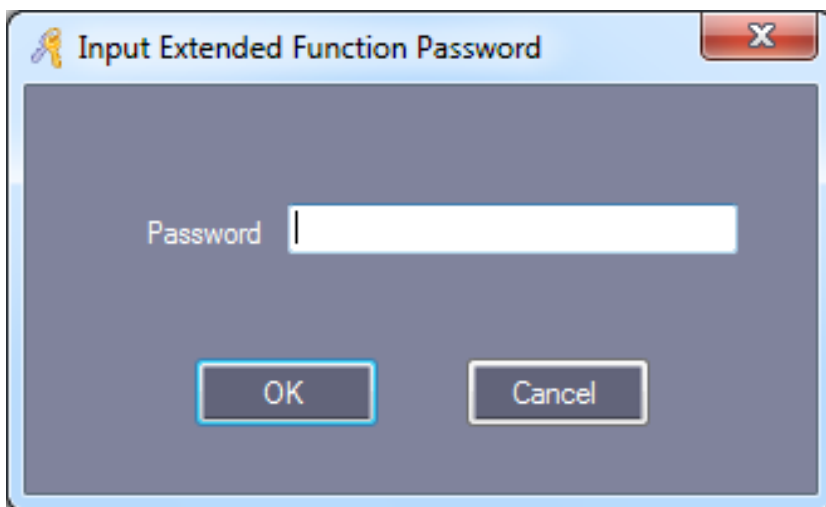

If you want to Activate the Extended Function . please input the password .


Please ask provider for password.

Active the Extended Functions, must Re-Login the software.

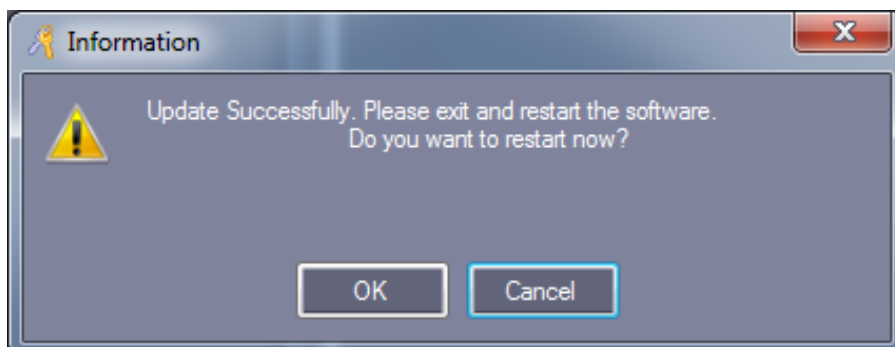

Extended Functions introduced as follows:

### 3.1 File

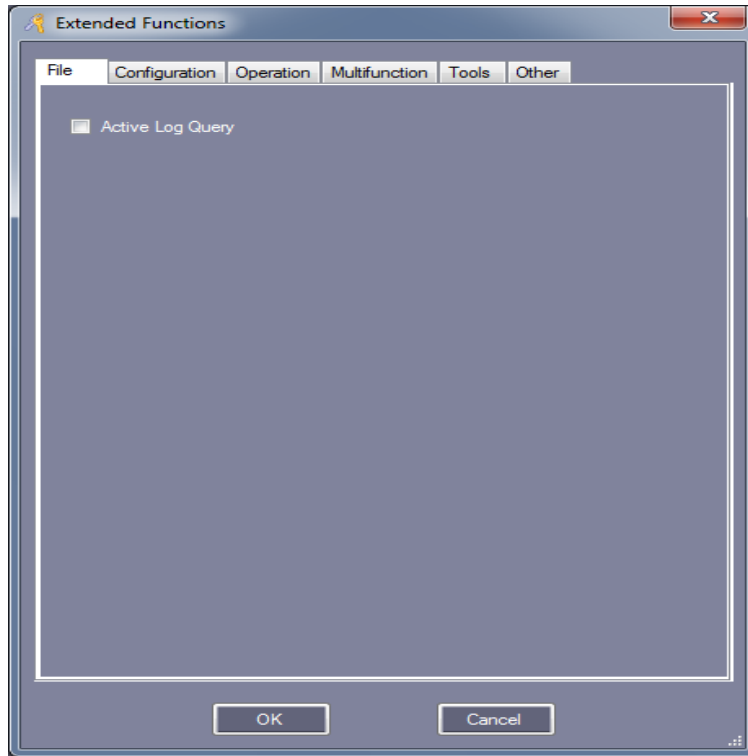


#### 3.1.1 Active Log Query

Click **【File】** > **【Log Query】**


Rec ID	DateTime	EventType	Event Description
626	2014-03-04 09:32:19 Tuesday	Information	1.abc.Adrotlor Professional Door Control Management_Ver 7.53.81.40228.Superabc:MsAccess.
625	2014-03-04 09:32:17 Tuesday	Information	1.abc.Exit
624	2014-03-04 09:29:53 Tuesday	Information	1.abc.13.Meeting Room Door,2014-03-04 09:29:49 Tuesday-Meeting Room Door-Door Open,Read Date: 2014-03-04 09:29...
623	2014-03-04 09:29:50 Tuesday	Information	1.abc.12.Meeting Room Door,2014-03-04 09:29:47 Tuesday-Meeting Room Door-Door Closed,Read Date: 2014-03-04 09:2...
622	2014-03-04 09:29:48 Tuesday	Information	1.abc.11.Manager Room Door,2014-03-04 09:29:44 Tuesday-Manager Room Door-Door Open,Read Date: 2014-03-04 09:...
621	2014-03-04 09:29:46 Tuesday	Information	1.abc.10.Manager Room Door,2014-03-04 09:29:43 Tuesday-Manager Room Door-Door Closed,Read Date: 2014-03-04 09:...
620	2014-03-04 09:29:44 Tuesday	Information	1.abc.9.HR,2014-03-04 09:29:40 Tuesday-HR-Door Open,Read Date: 2014-03-04 09:29:40 TuesdayAddr: HRStatus: Door ...
619	2014-03-04 09:29:41 Tuesday	Information	1.abc.8.HR,2014-03-04 09:29:37 Tuesday-HR-Door Closed,Read Date: 2014-03-04 09:29:37 TuesdayAddr: HRStatus: Doo...
618	2014-03-04 09:29:35 Tuesday	Information	1.abc.7.Entrance Door,2014-03-04 09:29:31 Tuesday-Entrance Door-Door Open,Read Date: 2014-03-04 09:29:31 Tuesday...
617	2014-03-04 09:29:32 Tuesday	Information	1.abc.6.Entrance Door,2014-03-04 09:29:28 Tuesday-Entrance Door-Door Closed,Read Date: 2014-03-04 09:29:28 Tuesd...
616	2014-03-04 09:28:43 Tuesday	Information	1.abc.5.Meeting Room Door[433100004],Already Upload..
615	2014-03-04 09:28:43 Tuesday	Information	1.abc.4.Manager Room Door[433100004],Already Upload..
614	2014-03-04 09:28:43 Tuesday	Information	1.abc.3.HR[433100004],Already Upload..
613	2014-03-04 09:28:43 Tuesday	Information	1.abc.2.Entrance Door[433100004],Upload Basic configure Successfully-[1]..
612	2014-03-04 09:28:43 Tuesday	Information	1.abc.1.Entrance Door[433100004],Upload Starting.....
611	2014-03-04 09:26:10 Tuesday	Information	1.abc.9.Meeting Room Door,2014-03-04 09:26:07 Tuesday-Meeting Room Door-Push Button,Read Date: 2014-03-04 09:26...
610	2014-03-04 09:26:06 Tuesday	Information	1.abc.8.Manager Room Door,2014-03-04 09:26:02 Tuesday-Manager Room Door-Push Button,Read Date: 2014-03-04 09:...
609	2014-03-04 09:26:04 Tuesday	Information	1.abc.7.HR,2014-03-04 09:26:00 Tuesday-HR-Push Button,Read Date: 2014-03-04 09:26:00 TuesdayAddr: HRStatus: Pus...
608	2014-03-04 09:25:59 Tuesday	Information	1.abc.6.Entrance Door,2014-03-04 09:25:56 Tuesday-Entrance Door-Push Button,Read Date: 2014-03-04 09:25:56 Tuesd...
607	2014-03-04 09:25:54 Tuesday	Information	1.abc.5.Meeting Room Door[433100004],Already Upload..
606	2014-03-04 09:25:54 Tuesday	Information	1.abc.4.Manager Room Door[433100004],Already Upload..
605	2014-03-04 09:25:54 Tuesday	Information	1.abc.3.HR[433100004],Already Upload..
604	2014-03-04 09:25:54 Tuesday	Information	1.abc.2.Entrance Door[433100004],Upload Basic configure Successfully-[1]..
603	2014-03-04 09:25:53 Tuesday	Information	1.abc.1.Entrance Door[433100004],Upload Starting.....
602	2014-03-04 09:25:46 Tuesday	Information	1.abc.8.HR,2014-03-04 09:25:42 Tuesday-HR-Push Button,Read Date: 2014-03-04 09:25:42 TuesdayAddr: HRStatus: Pus...
601	2014-03-04 09:25:38 Tuesday	Information	1.abc.7.Manager Room Door,2014-03-04 09:25:35 Tuesday-Manager Room Door-Push Button,Read Date: 2014-03-04 09:...
600	2014-03-04 09:25:34 Tuesday	Information	1.abc.6.Entrance Door,2014-03-04 09:25:30 Tuesday-Entrance Door-Push Button,Read Date: 2014-03-04 09:25:30 Tuesd...
599	2014-03-04 09:24:25 Tuesday	Information	1.abc.5.Meeting Room Door[433100004],Already Upload..
598	2014-03-04 09:24:24 Tuesday	Information	1.abc.4.Manager Room Door[433100004],Already Upload..

## 3.2 Configuration

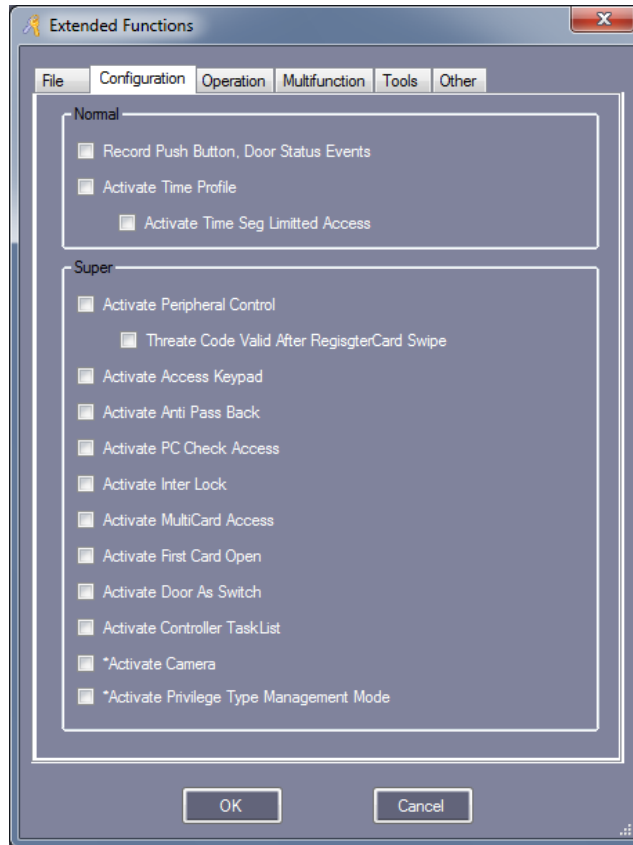

### 3.2.1 Record Push Button Events

Record each time the button operation, active this function, you must upload on the console.

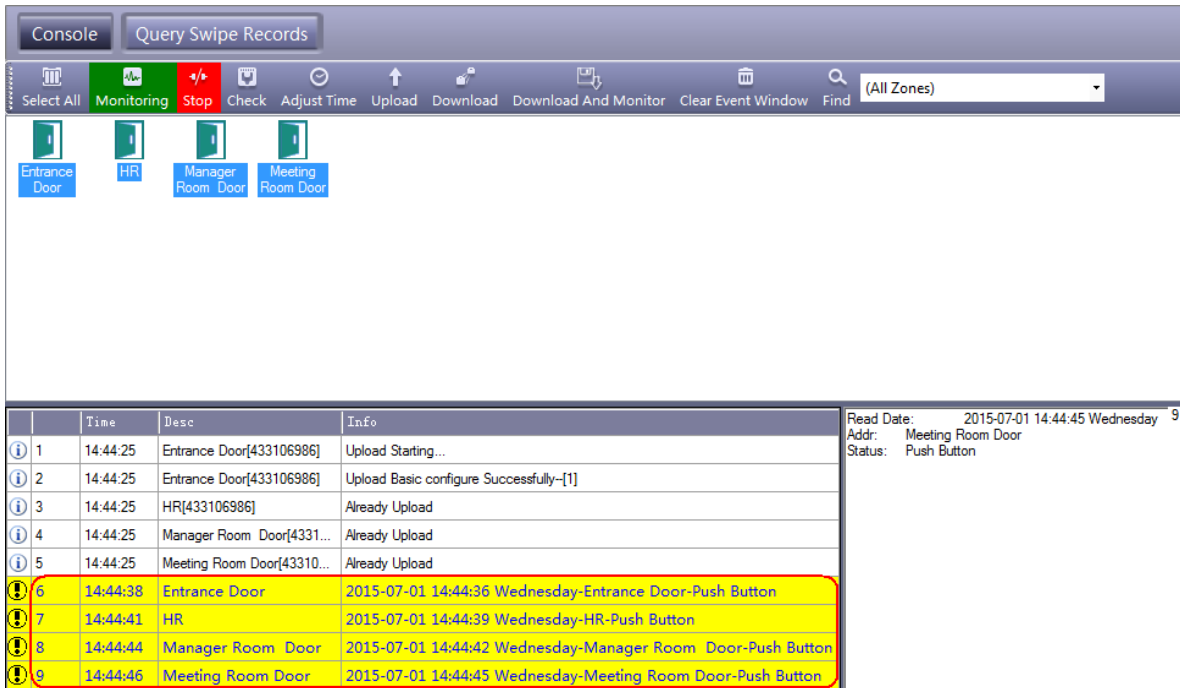

### 3.2.2 Record Door Status Events

Record “Door Open” and “Door Closed” time. Must connect door sensor. Active this function, you must upload on the console.

Console Query Swipe Records

Select All Monitoring Stop Check Adjust Time Upload Download Download And Monitor Clear Event Window Find (All Zones)

Entrance Door HR Manager Room Door Meeting Room Door

	Time	Desc	InFo
1	14:54:29	Entrance Door[433106986]	Upload Starting...
2	14:54:30	Entrance Door[433106986]	Upload Basic configure Successfully-[1]
3	14:54:30	HR[433106986]	Already Upload
4	14:54:30	Manager Room Door[4331...	Already Upload
5	14:54:30	Meeting Room Door[43310...	Already Upload
6	14:54:35	Entrance Door	2015-07-01 14:54:34 Wednesday-Entrance Door-Door Closed
7	14:54:37	Entrance Door	2015-07-01 14:54:35 Wednesday-Entrance Door-Door Open
8	14:54:40	HR	2015-07-01 14:54:39 Wednesday-HR-Door Closed
9	14:54:42	HR	2015-07-01 14:54:41 Wednesday-HR-Door Open
10	14:54:46	Manager Room Door	2015-07-01 14:54:45 Wednesday-Manager Room Door-Door Closed
11	14:54:47	Manager Room Door	2015-07-01 14:54:46 Wednesday-Manager Room Door-Door Open
12	14:54:50	Meeting Room Door	2015-07-01 14:54:49 Wednesday-Meeting Room Door-Door Closed
13	14:54:52	Meeting Room Door	2015-07-01 14:54:51 Wednesday-Meeting Room Door-Door Open

Read Date: 2015-07-01 14:54:51 Wednesday 13  
 Addr: Meeting Room Door  
 Status: Door Open

### 3.2.3 Activate Time Profile

Click **【Configuration】** > **【Time Profile】**

Configuration

Controllers Department Personnel Access Privilege Time Profile


New Edit Delete Import Export To Excel Holiday Control Find

Profile 1 for allowing any time to come in or go out; Profile 0 for no admittance.

Time Profile ID	Mon	Tue	Wed	Thu	Fri	Sat	Sun	No. 1 Begin	End1	No. 2 Begin	End2	No. 3 Begin	End3	Linked Time Profile	Activate	Deactive
1																

Configuration Operation Attendance

Click “New” to add new Time Profile and setting.

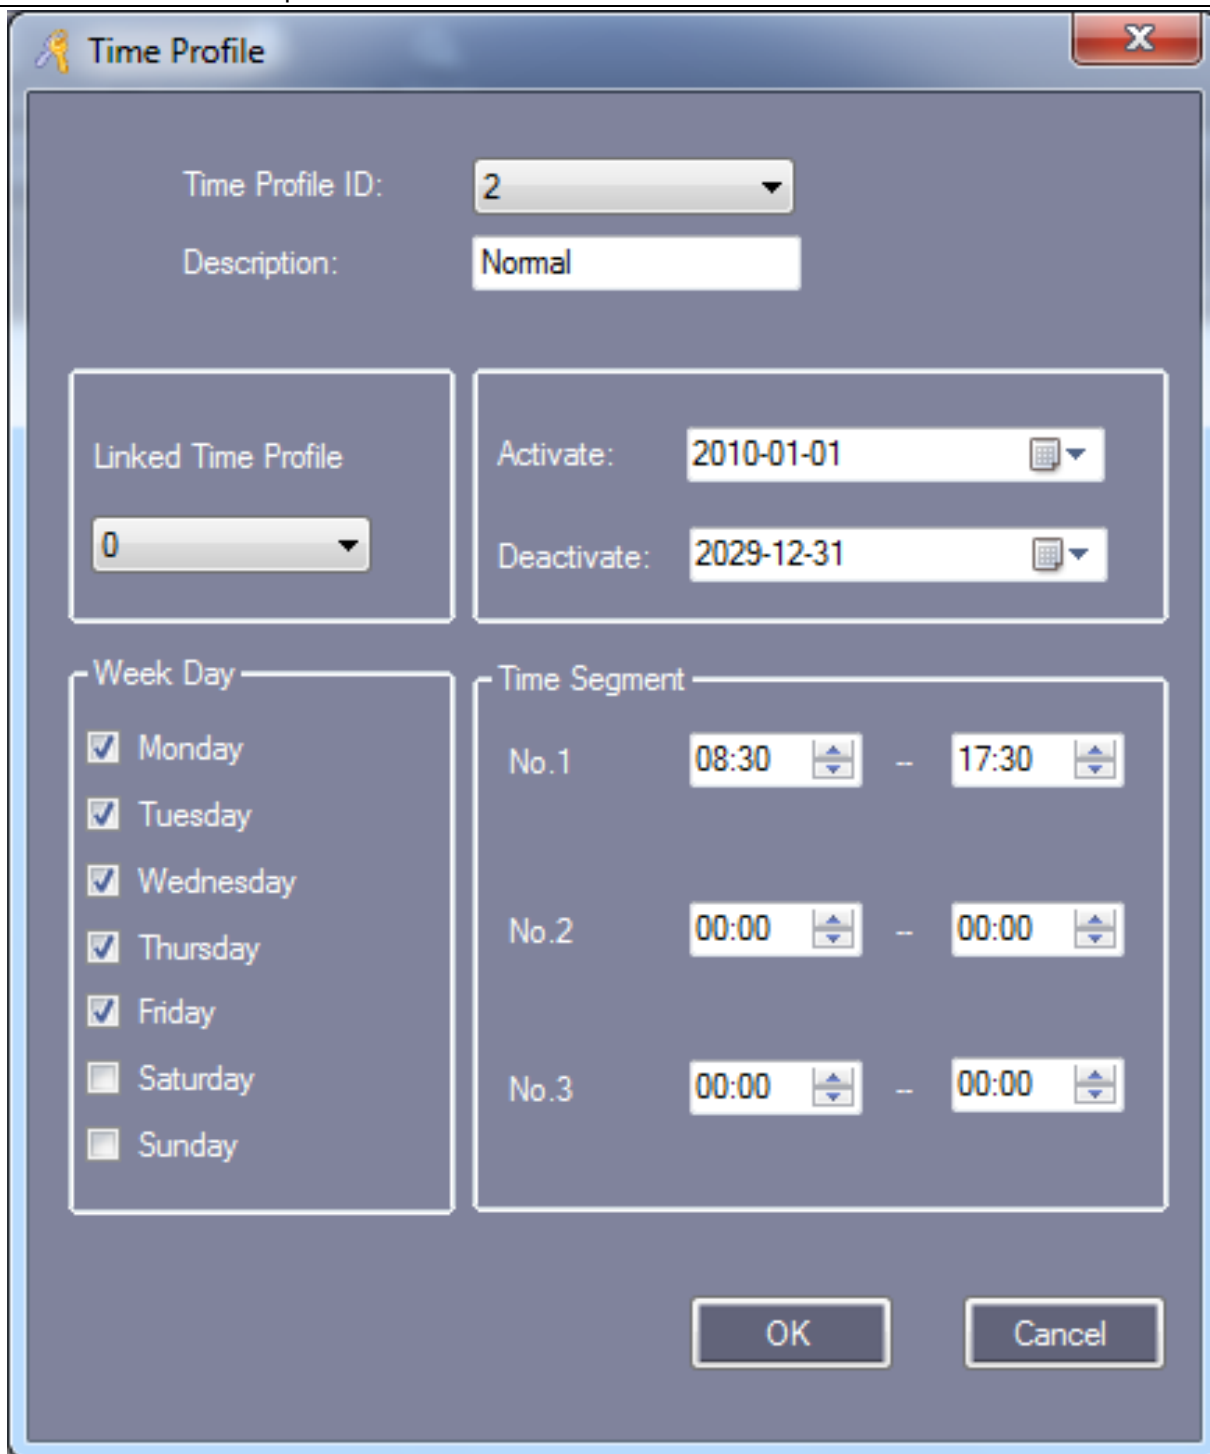

Click "OK"

Time Profile ID	Mon	Tue	Wed	Thu	Fri	Sat	Sun	No. 1 Begin	End1	No. 2 Begin	End2	No. 3 Begin	End3	Linked Time Profile	Activate	Deactive
2 [Normal]	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	08:30	17:30	00:00	00:00	00:00	00:00	0	2010-01-01	2029-12-31

If you assign the user card "Normal", authority that work from Monday to Friday at 08:30-17:30, it has permissions to get in or out during this time range.

If you need to work on Saturday, First write 3 in "Time Profile ID", Then the "Time Profile ID" 2 linked "Time Profile ID"3.



Add new "Time Profile 3"

Click "OK"

Controllers Department Personnel Access Privilege Time Profile

New Edit Del Print Export To Excel Holiday Control Find

Profile 1 for allowing any time to come in or go out; Profile 0 for no admittance.


Time Profile ID	Mon	Tue	Wed	Thu	Fri	Sat	Sun	No.1 Begin	End1	No.2 Begin	End2	No.3 Begin	End3	Linked Time Profile	Activate	Deactive
2 [Normal]	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	08:30	17:30	00:00	00:00	00:00	00:00	0	2010-01-01	2029-12-31
3 [Weekend]	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	08:30	12:30	00:00	00:00	00:00	00:00	0	2010-01-01	2029-12-31

"Time Profile 2" link "Time Profile 3"

## Access Control Software Operation Guide

After setting “Time Profile”, you need to assign permissions to the corresponding user in the Access Privilege, and then the users can pass in and out at the specified “Time Profile”.


Click **【Configuration】 > 【Access Privilege】 > 【Change Privileges】**

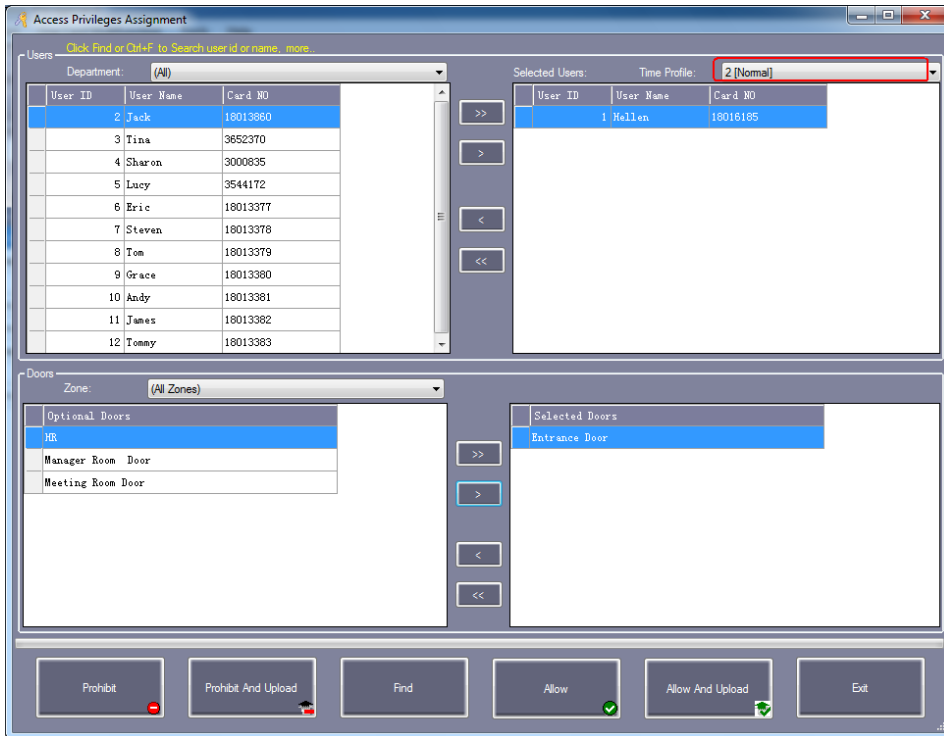

After setting privilege, please select **【Operation】 > 【Console】 > 【Upload】**

### 3.2.4 Activate Peripheral Control


Click **【Configuration】 > 【Peripheral】**

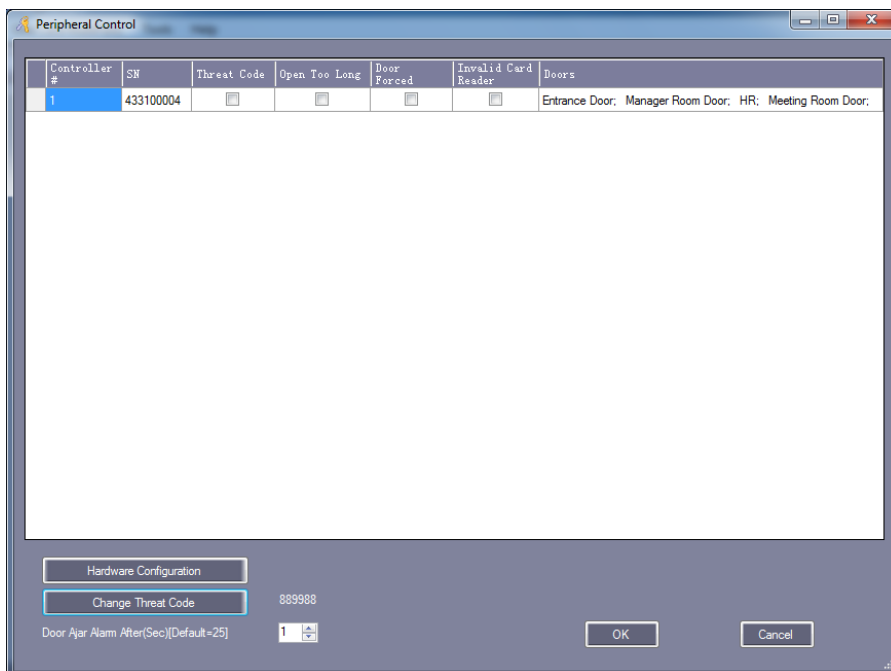

“Threat Code”: Must be used with the PIN keyboard Card Reader.


“Thrust In”: Must be connect with door sensor.

**【Hardware Configuration】**

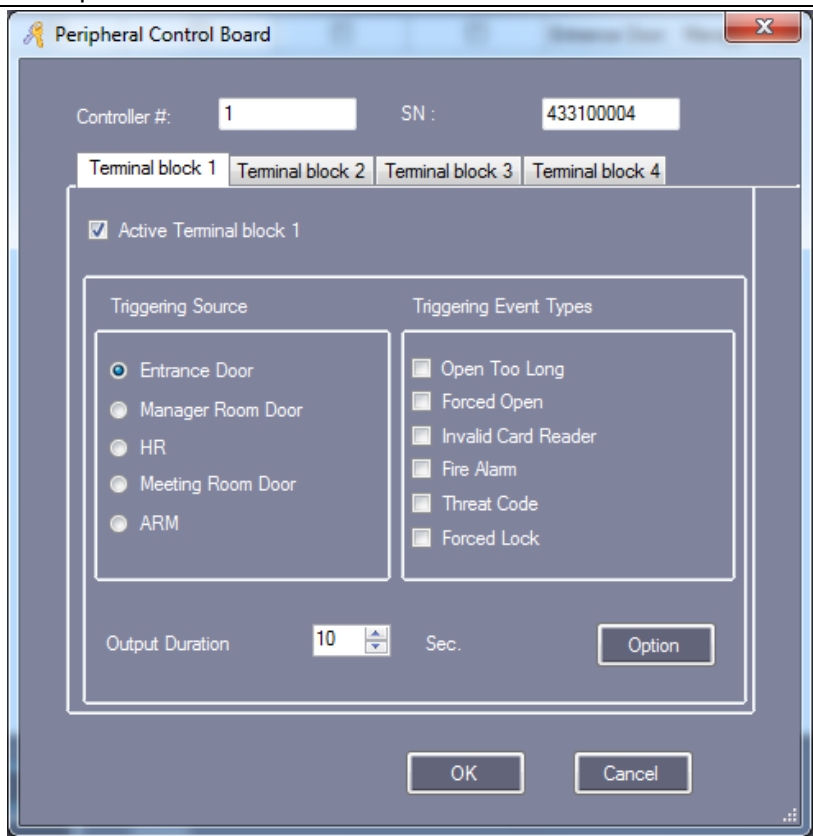


### 3.2.5 Activate Access Keypad

Click **【Configuration】 > 【Pwd MGT】**  
**【Card + PIN】**

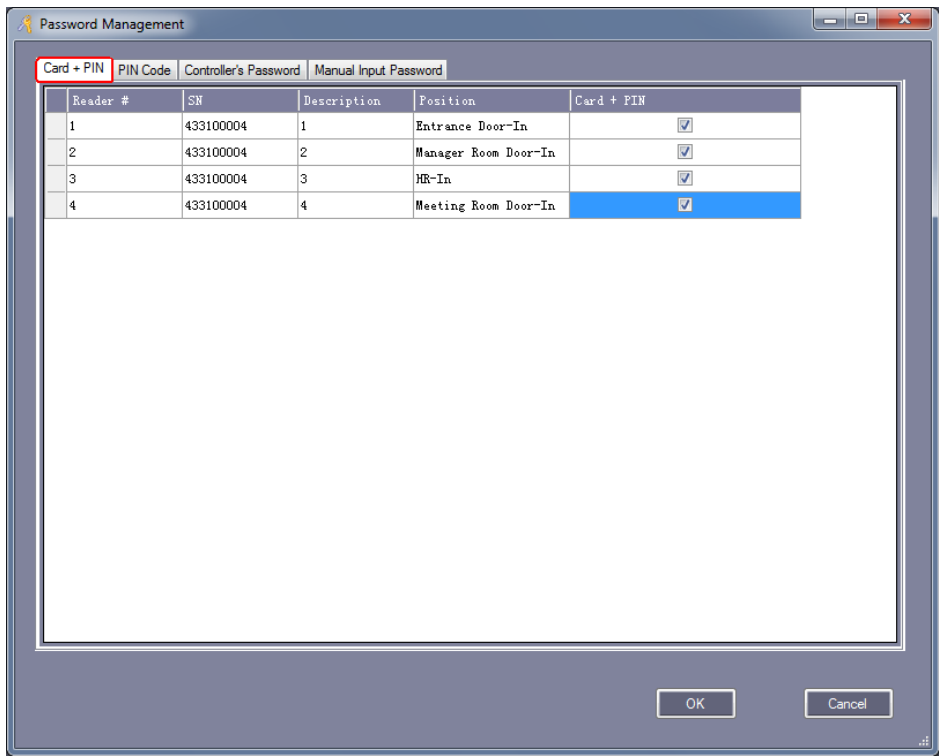


**【PIN Code】**

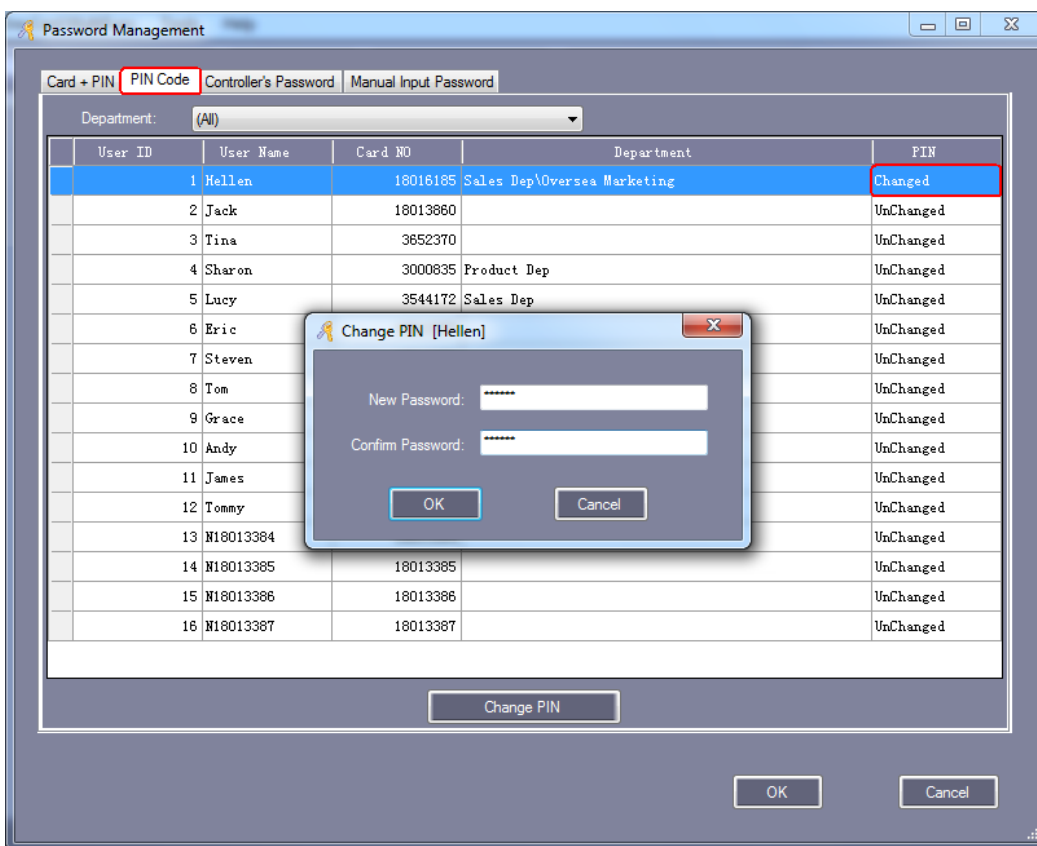


User's default password is 345678.

**【Controller's Password】**

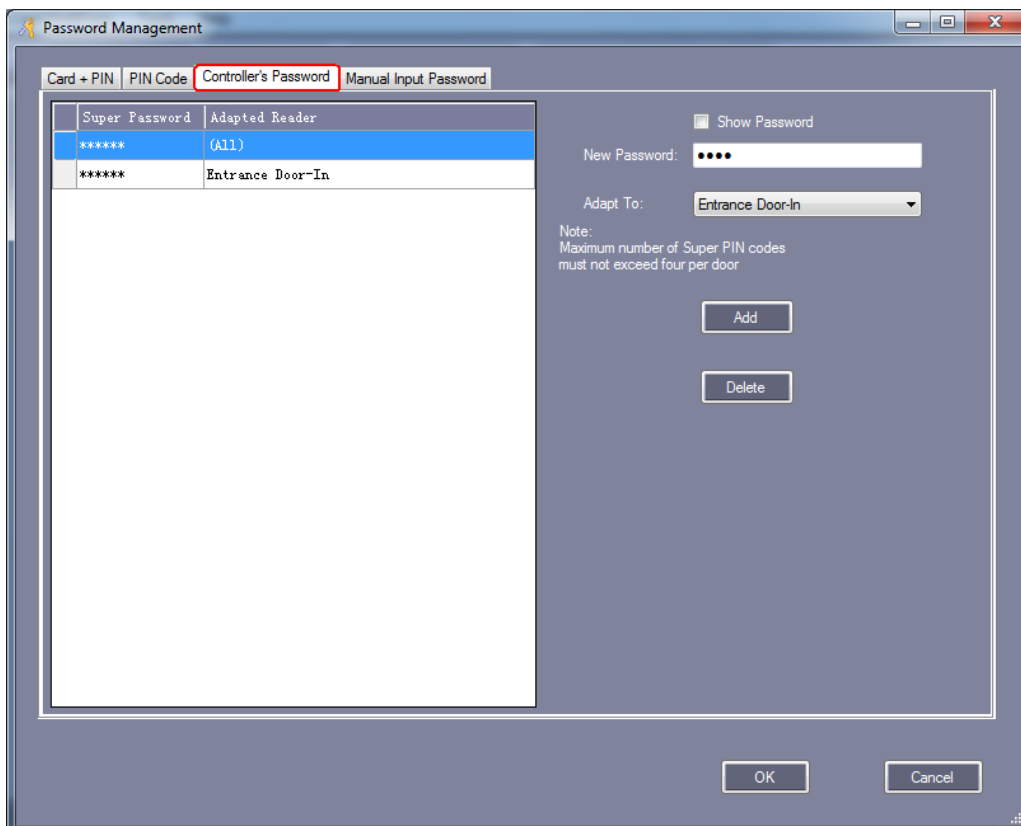


**【Manual Input Password】**

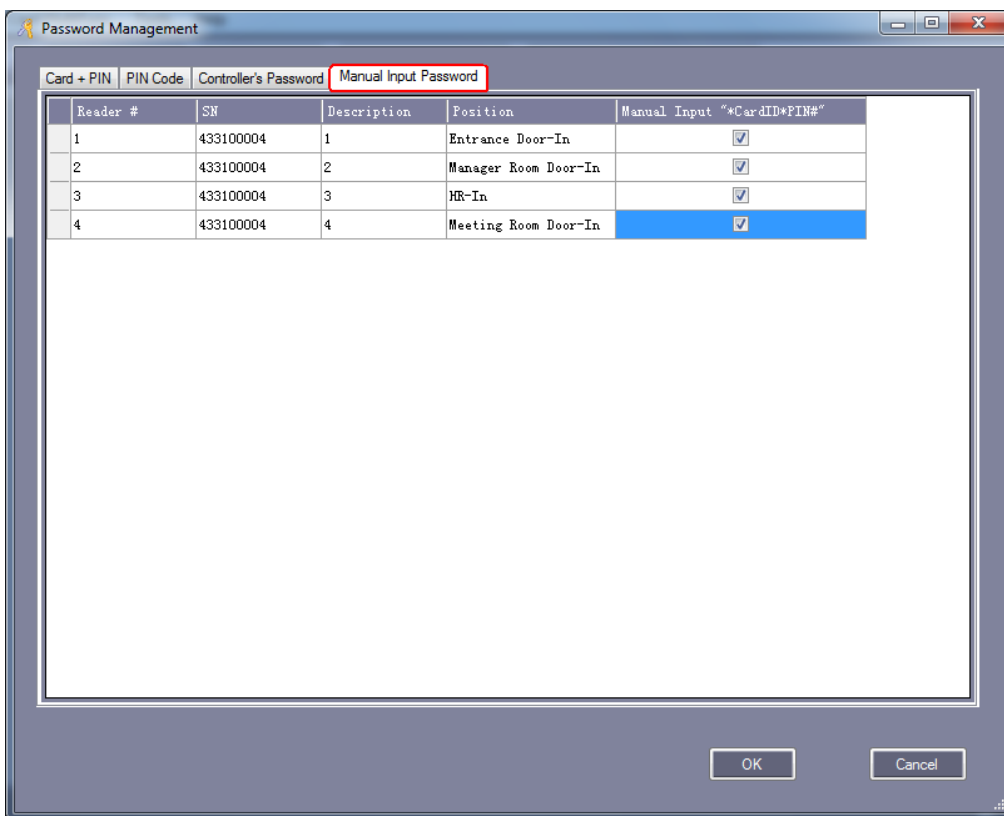


### 3.2.6 Activate Anti Pass Back

Click **【Configuration】 > 【Anti-passback】**

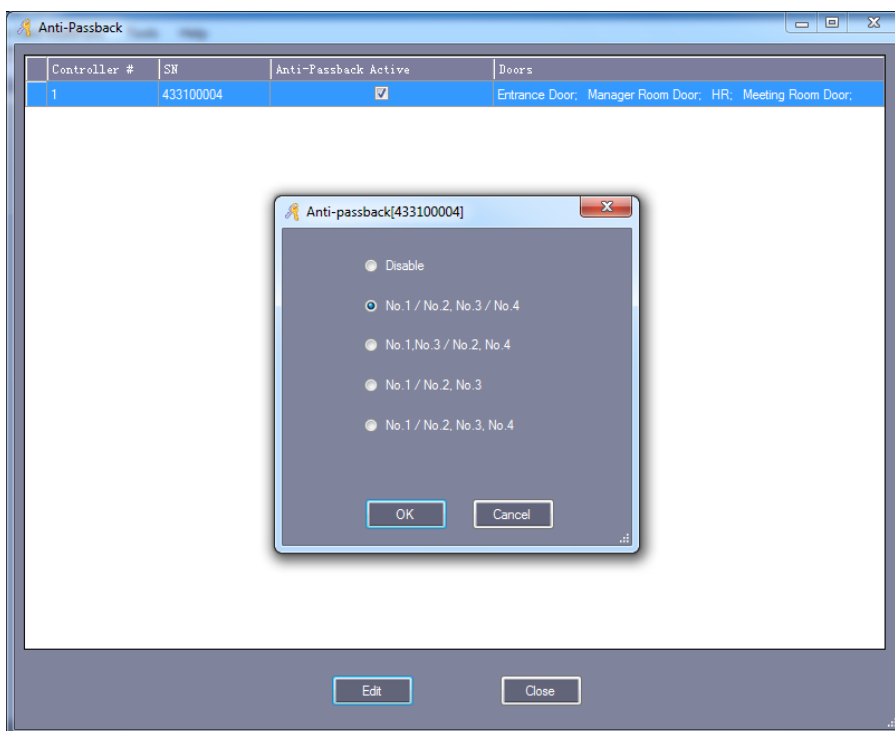


### 3.2.7 Activate Inter Lock

Click **【Configuration】 > 【Inter Lock】**

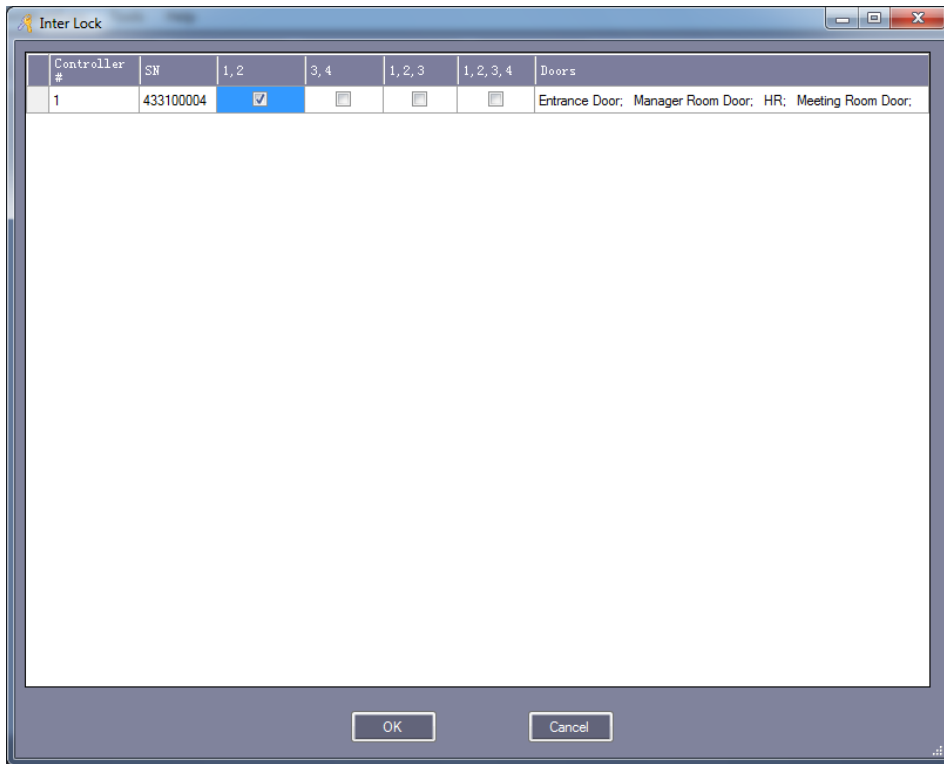

### 3.2.8 Activate MultiCard Access


Click **【Configuration】** > **【Multi-card】**

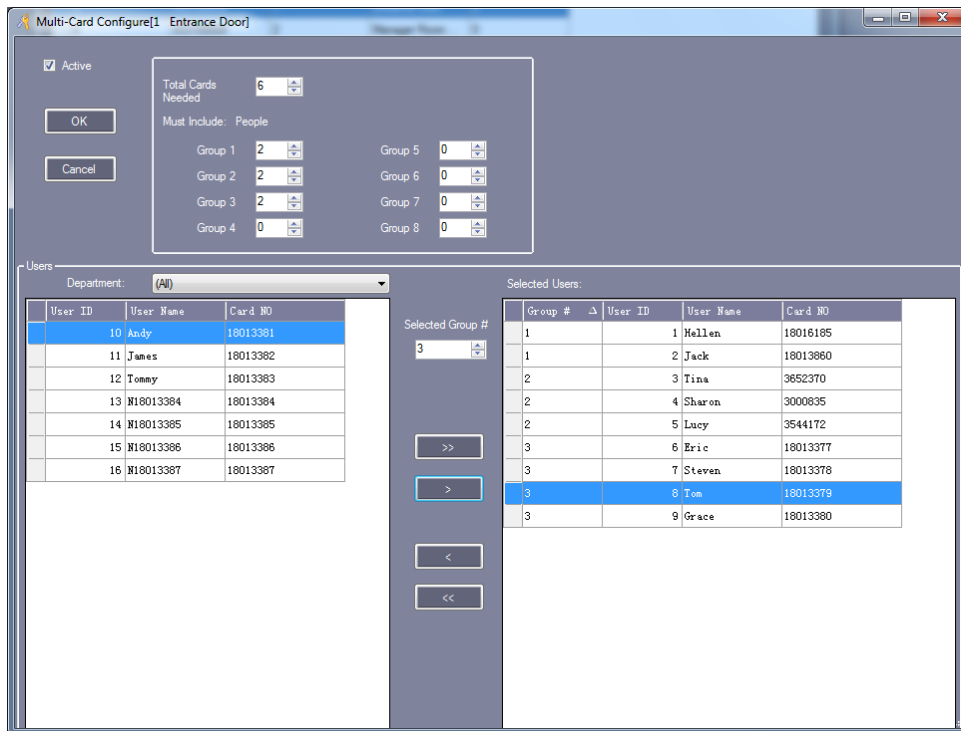

The first group has two persons, the second group has two persons, and the third group has two persons. Each group comes two persons read the card together then allowed to open the door.


### 3.2.9 Activate First Card Open

Click **【Configuration】** > **【First Card】**

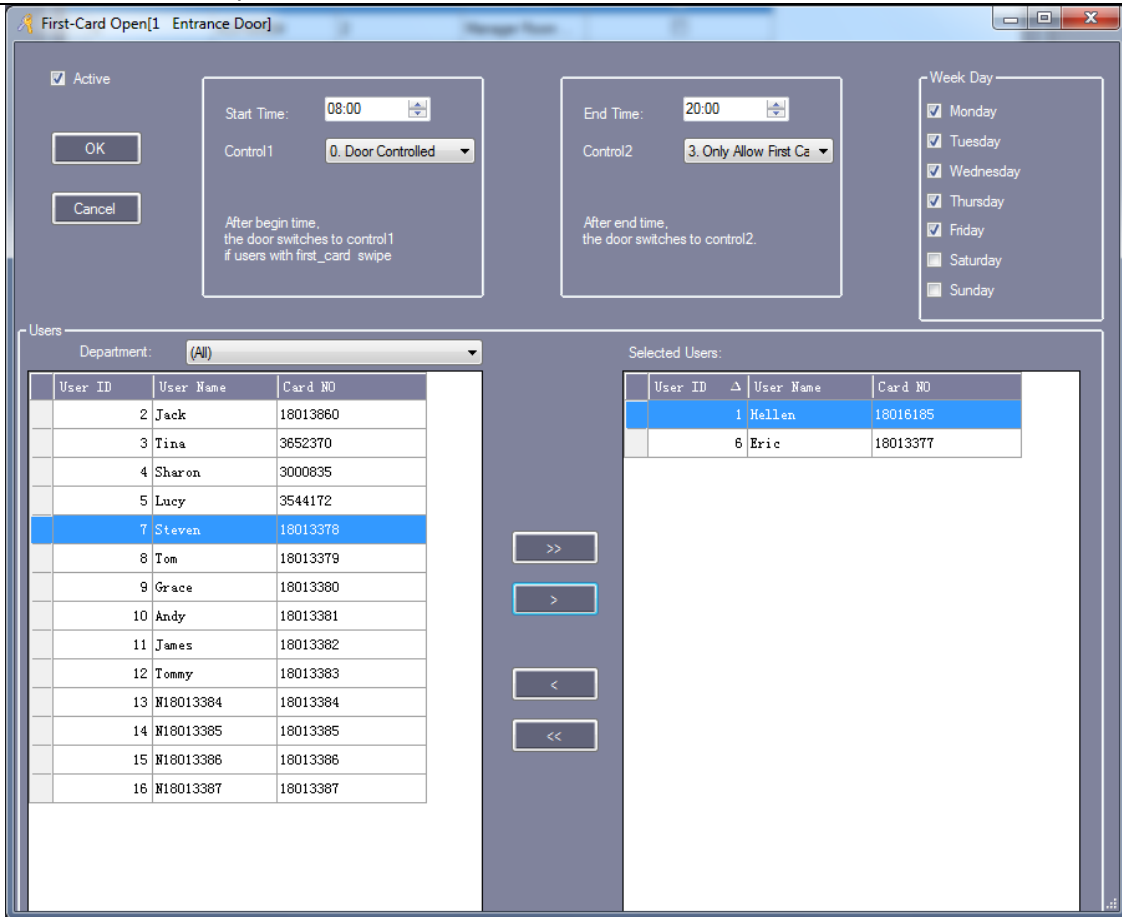


### 3.2.10 Activate Controller TaskList

Click **【Configuration】 > 【Task List】**

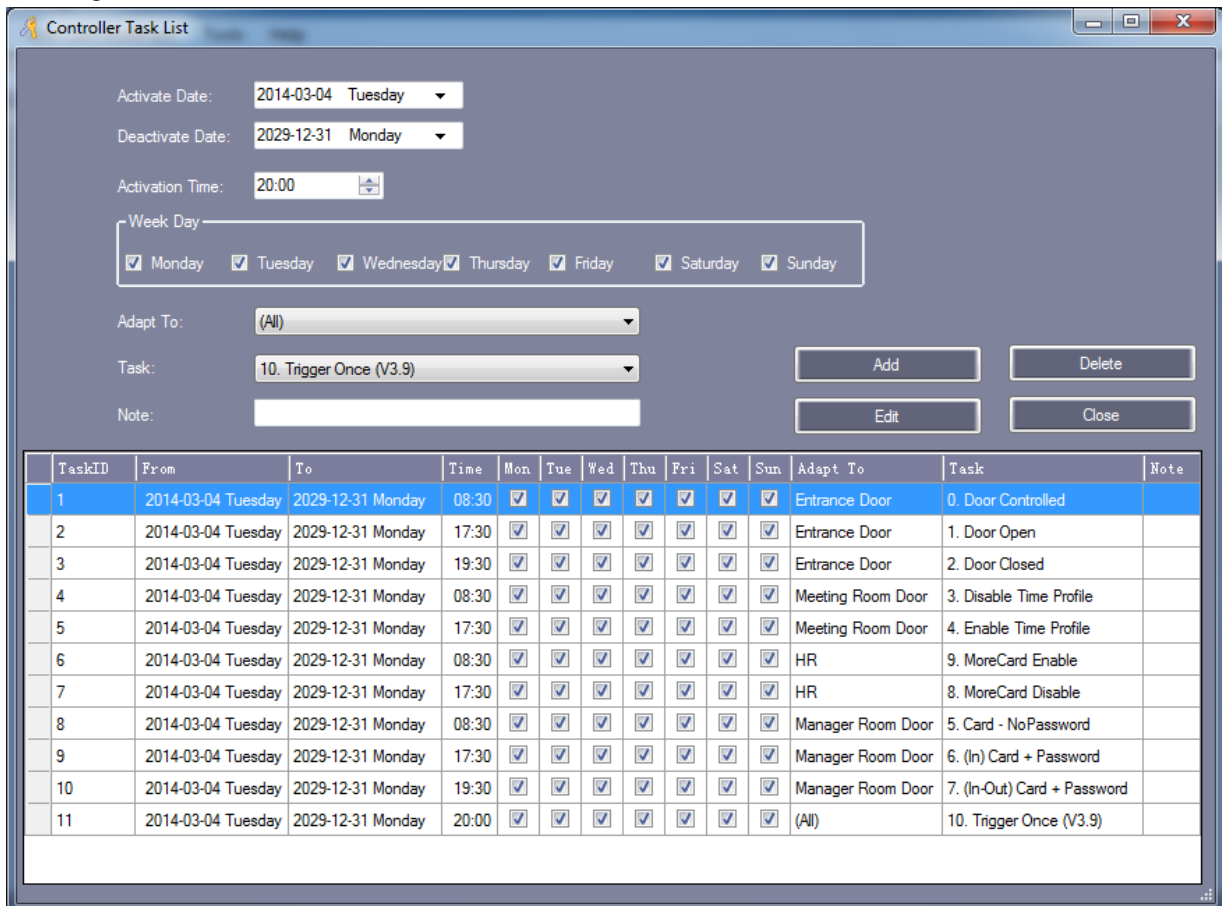


### 3.3 Operation

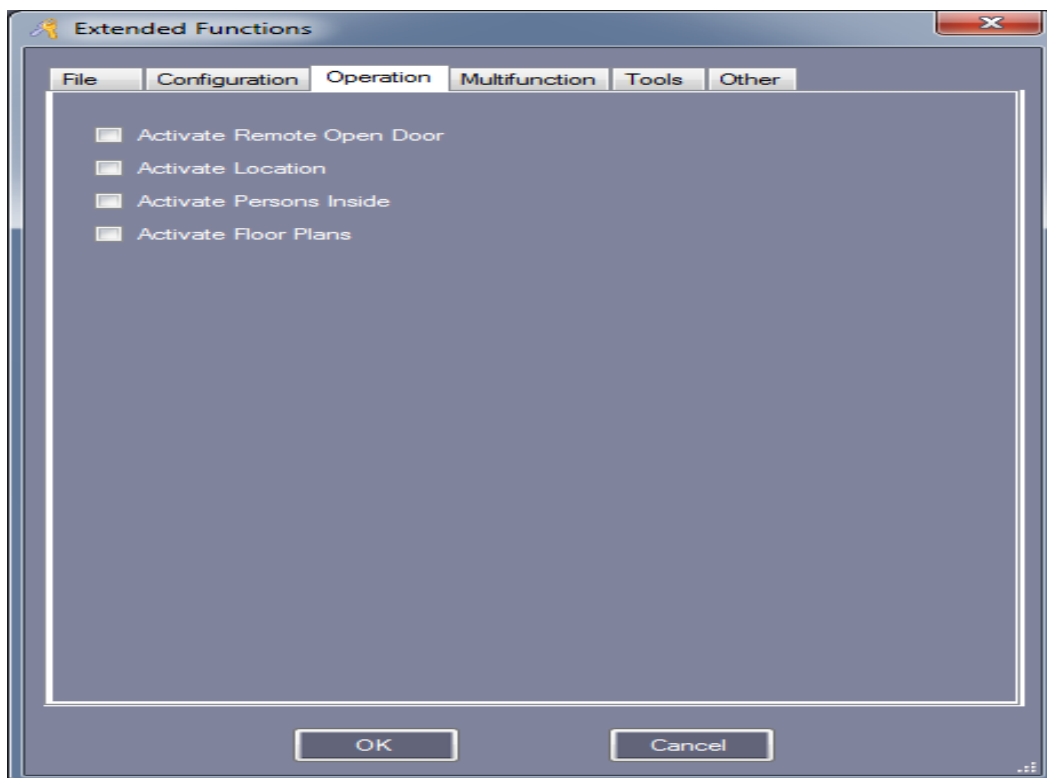


#### 3.3.1 Activate Remote Open Door

Click **【Operation】** > **【Console】**

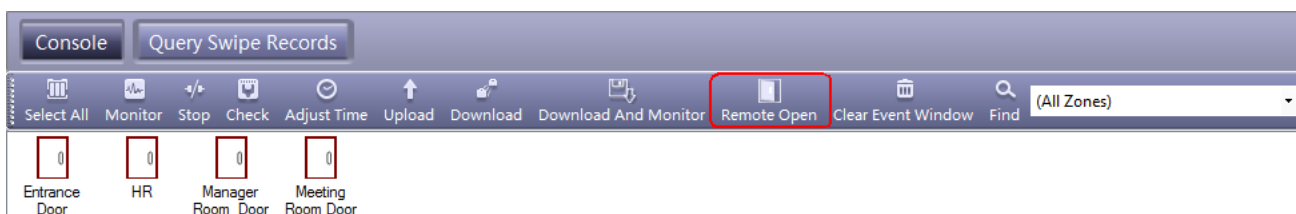


First selected “Entrance Door”, Then click “Remote Open”.

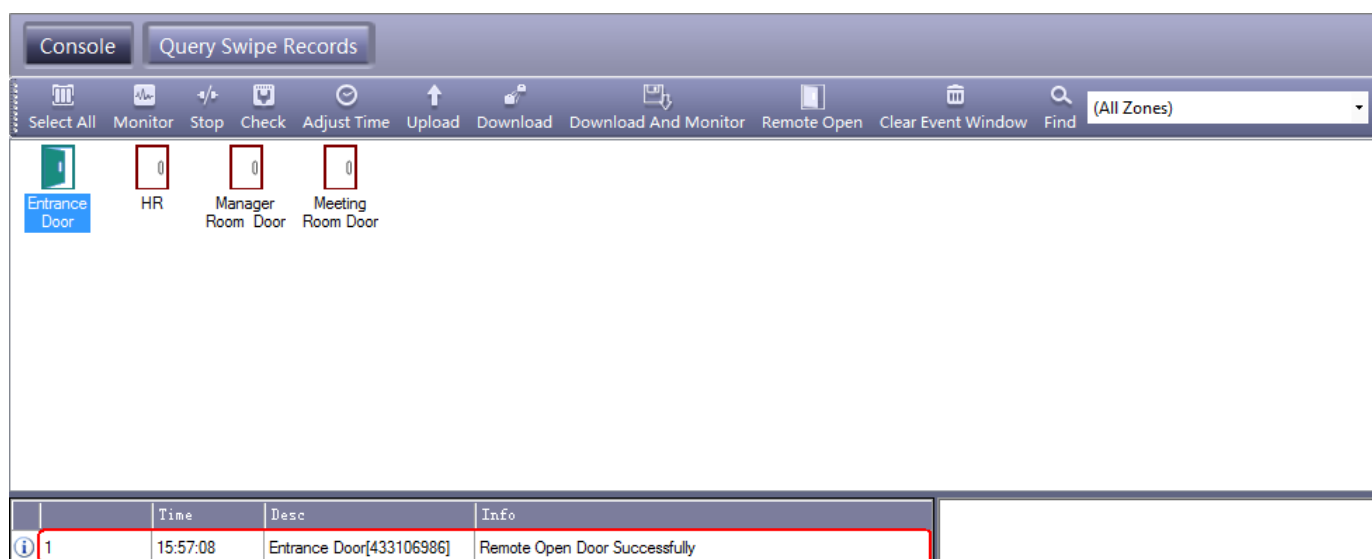




## 3.4 Multifunction

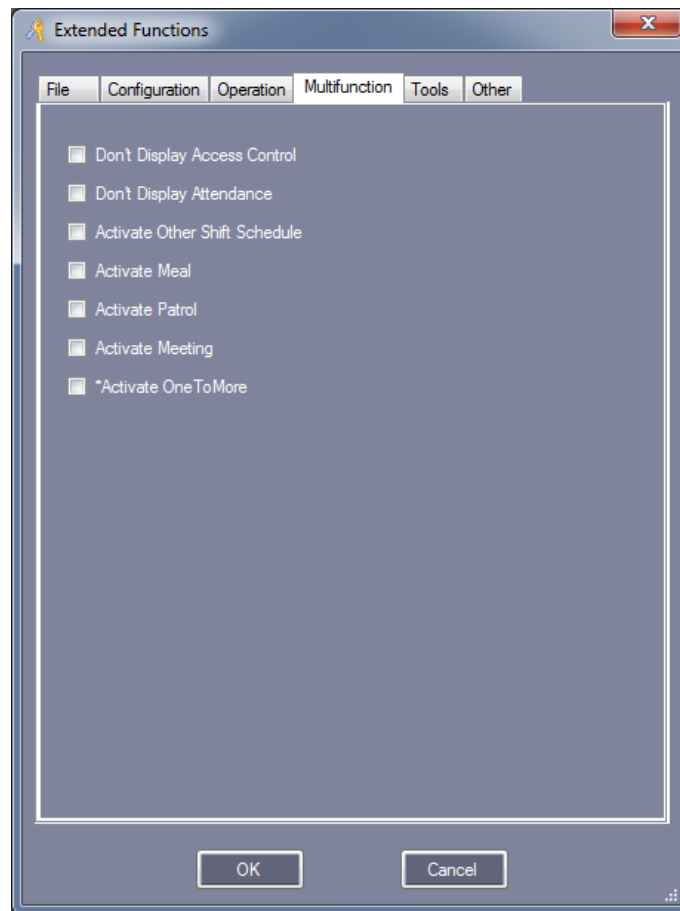

### 3.4.1 Activate Meal

Enter the “Extended Function”, In front of “Activate Meal” mark this  with  to active this function. After Active this function , Re-login software. Click **【Const Meal】** .

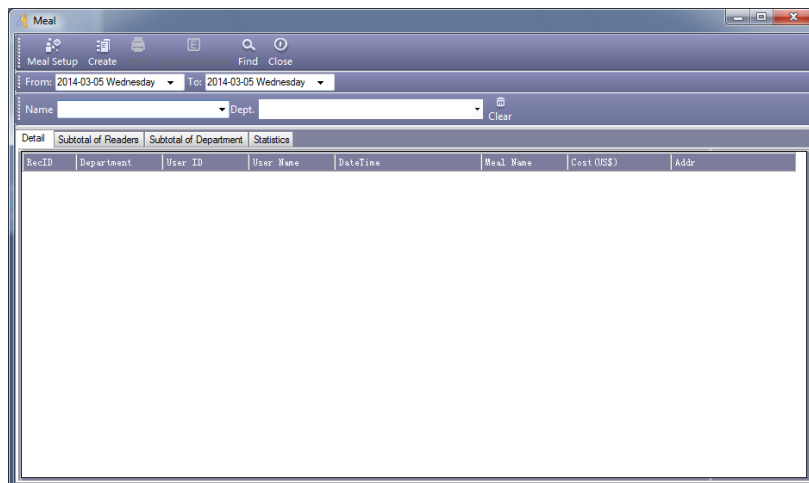


#### 3.4.1.1 Meal Setup

##### 3.4.1.1.1 Readers


Click “Meal Setup”, At the meal interface, Select “Readers”.

Eg: Set “Dining Room 1” and “Dining Room 2” is a dining point.

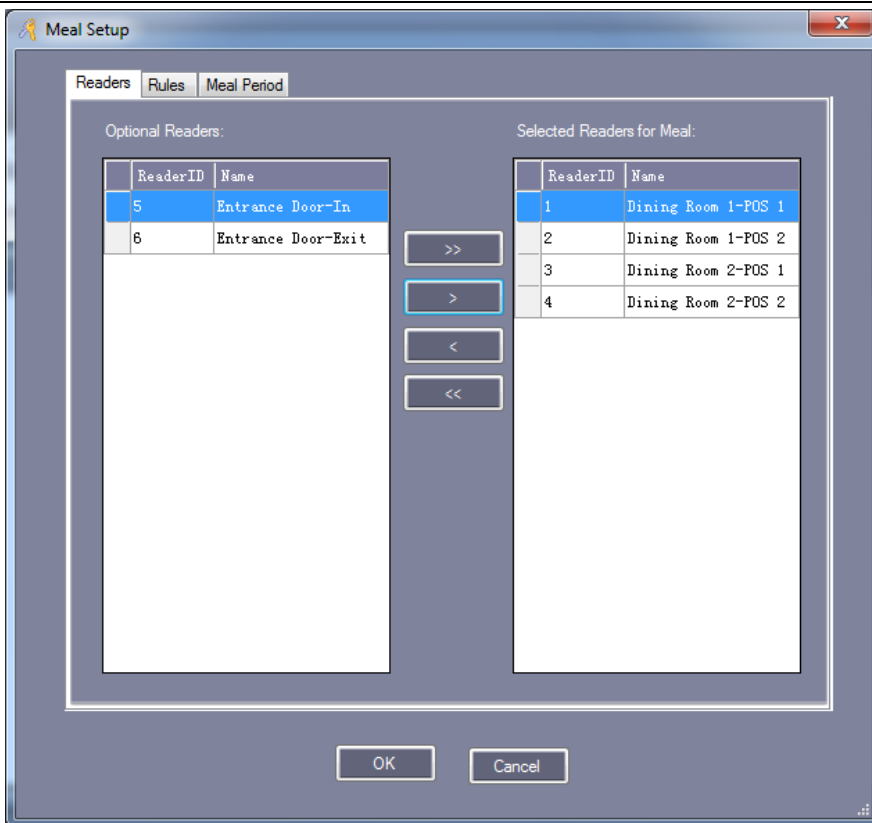


### 3.4.1.1.2 Rules

Click “Meal Setup”, At the meal interface, Select “Rules”.

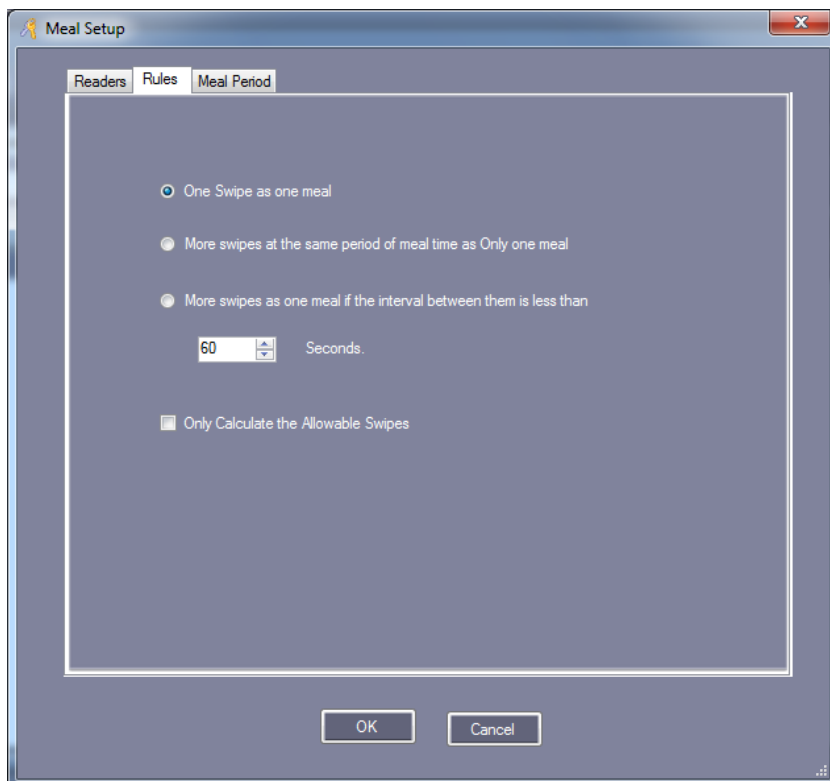


### 3.4.1.1.3 Meal Period

Click “Meal Setup”, At the meal interface, Select “Meal Period”.

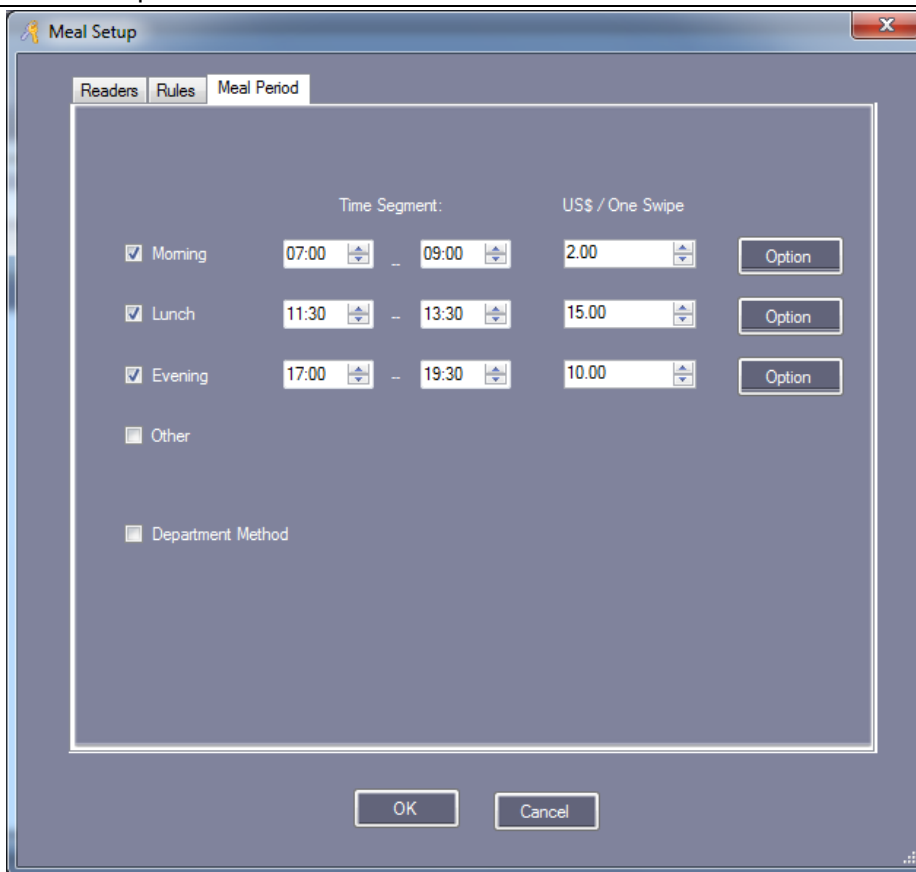

Click "Option", Set a fixed amount of consumption.

If you want set a fixed amount of consumption, Click "Option" to finish the settings.

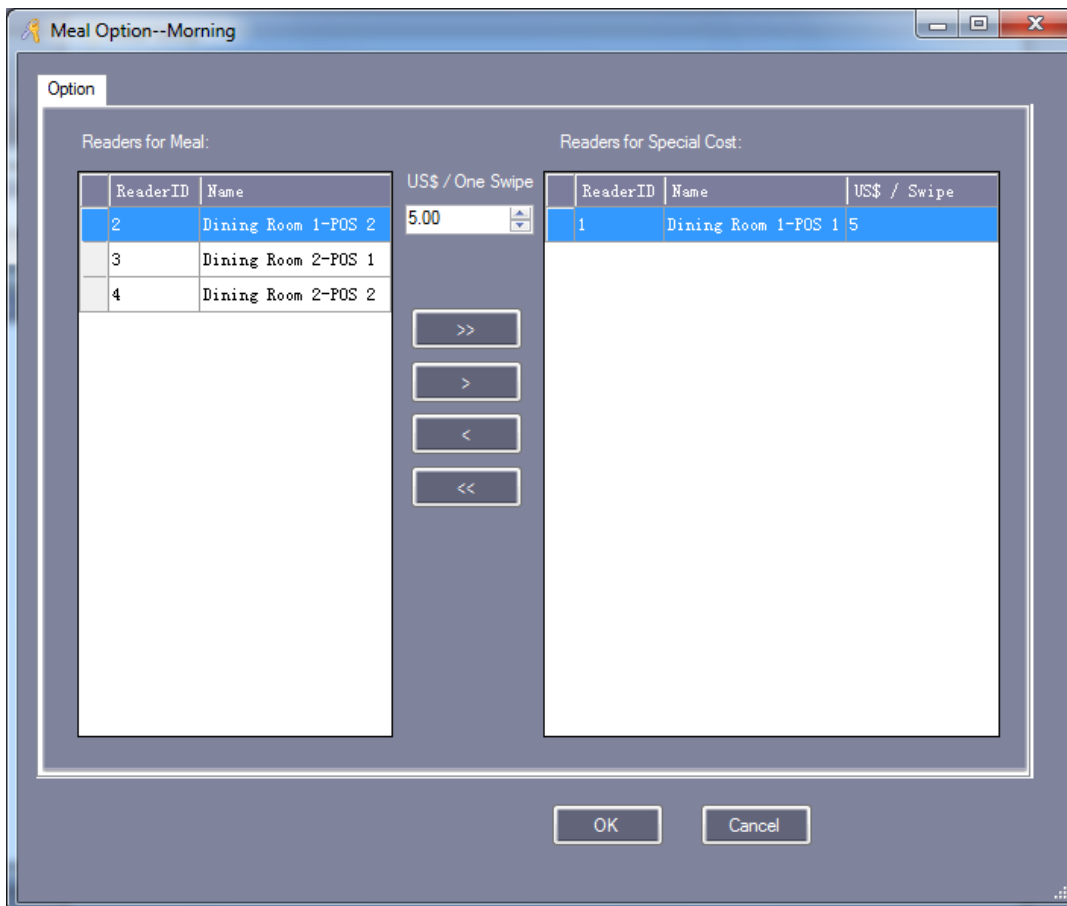

### 3.4.1.2 Meal Report

#### 3.4.1.2.1 Meal Details Report

Click “Create”, At the meal interface , Display the details of the staff dining at which POS machine.

RecID	Department	User ID	User Name	DateTime	Meal Name	Cost (US\$)	Addr
54	Sales Dep\Overs...	1	Hellen	2014-03-05 09:15:37 Wednesday	Morning	2.00	Dining Room 1-POS 1
58	Sales Dep\Overs...	1	Hellen	2014-03-05 09:23:38 Wednesday	Morning	2.00	Dining Room 1-POS 2
60	Sales Dep\Overs...	1	Hellen	2014-03-05 12:22:35 Wednesday	Lunch	15.00	Dining Room 1-POS 2
61	Sales Dep\Overs...	1	Hellen	2014-03-05 18:22:46 Wednesday	Evening	10.00	Dining Room 2-POS 1
63	Product	2	Jack	2014-03-05 07:23:06 Wednesday	Morning	2.00	Dining Room 2-POS 2
52	Product	2	Jack	2014-03-05 08:55:06 Wednesday	Morning	2.00	Dining Room 1-POS 1
53	Product	2	Jack	2014-03-05 08:55:42 Wednesday	Morning	2.00	Dining Room 2-POS 2
64	Product	2	Jack	2014-03-05 12:23:13 Wednesday	Lunch	15.00	Dining Room 2-POS 1
66	Product	2	Jack	2014-03-05 19:23:34 Wednesday	Evening	10.00	Dining Room 1-POS 1
68	Sales Dep	4	Sharon	2014-03-05 08:25:51 Wednesday	Morning	2.00	Dining Room 1-POS 2
69	Sales Dep	4	Sharon	2014-03-05 13:26:00 Wednesday	Lunch	15.00	Dining Room 2-POS 1
70	Sales Dep	4	Sharon	2014-03-05 18:26:06 Wednesday	Evening	10.00	Dining Room 2-POS 2
5	Product	9	Grace	2014-03-05 08:10:49 Wednesday	Morning	2.00	Dining Room 1-POS 1
6	Product	9	Grace	2014-03-05 08:29:10 Wednesday	Morning	2.00	Dining Room 1-POS 1
7	Product	9	Grace	2014-03-05 09:33:28 Wednesday	Morning	2.00	Dining Room 1-POS 1


#### 3.4.1.2.2 Meal Stat. report of Readers for Meal

Click “Create”, At the meal interface , Select “Subtotal of Readers”, Display all dining times and total money at the each dining point.

Addr	Count (Times)	Amount (US\$)
Dining Room 1-POS 1	6	20.00
Dining Room 1-POS 2	3	19.00
Dining Room 2-POS 1	3	40.00
Dining Room 2-POS 2	3	14.00
Total	15	93.00


#### 3.4.1.2.3 Meal Stat. report of Subtotal of Department

Click “Create”, At the meal interface , Select “Subtotal of Department”, Display all dining department and total money.

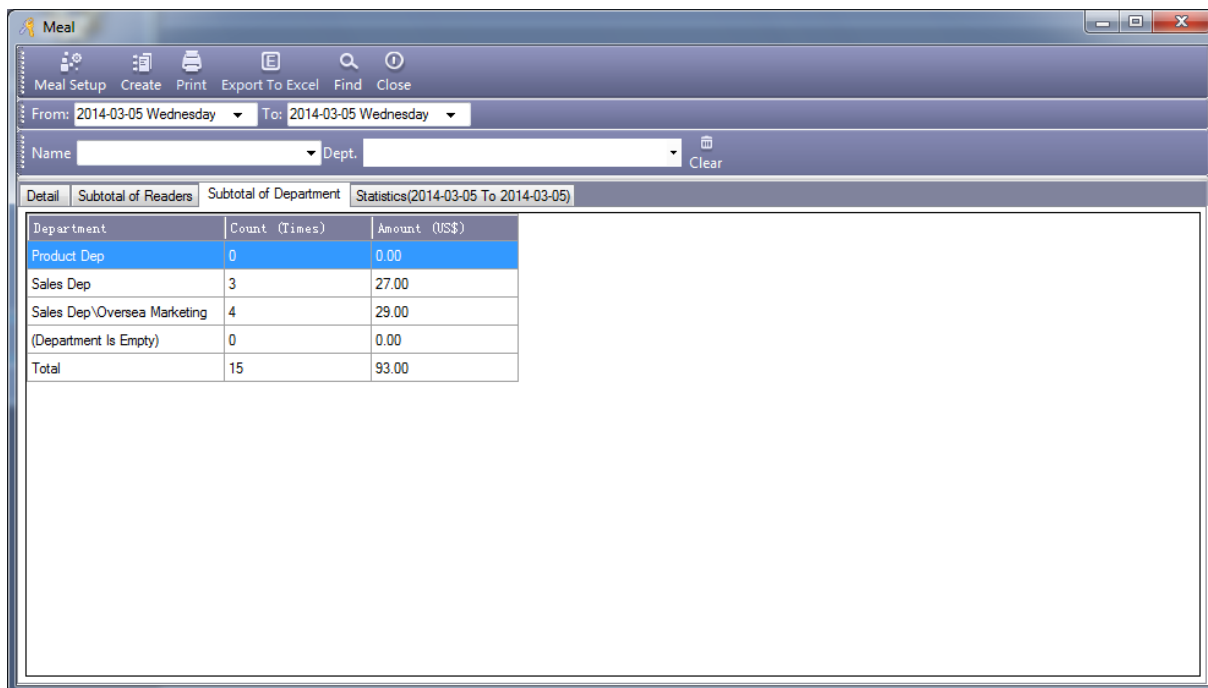


### 3.4.1.2.4 Meal Stat. report of Users

Click “Create”, At the meal interface , Select “Statistics”, Statistics of each employee dining times and total money.

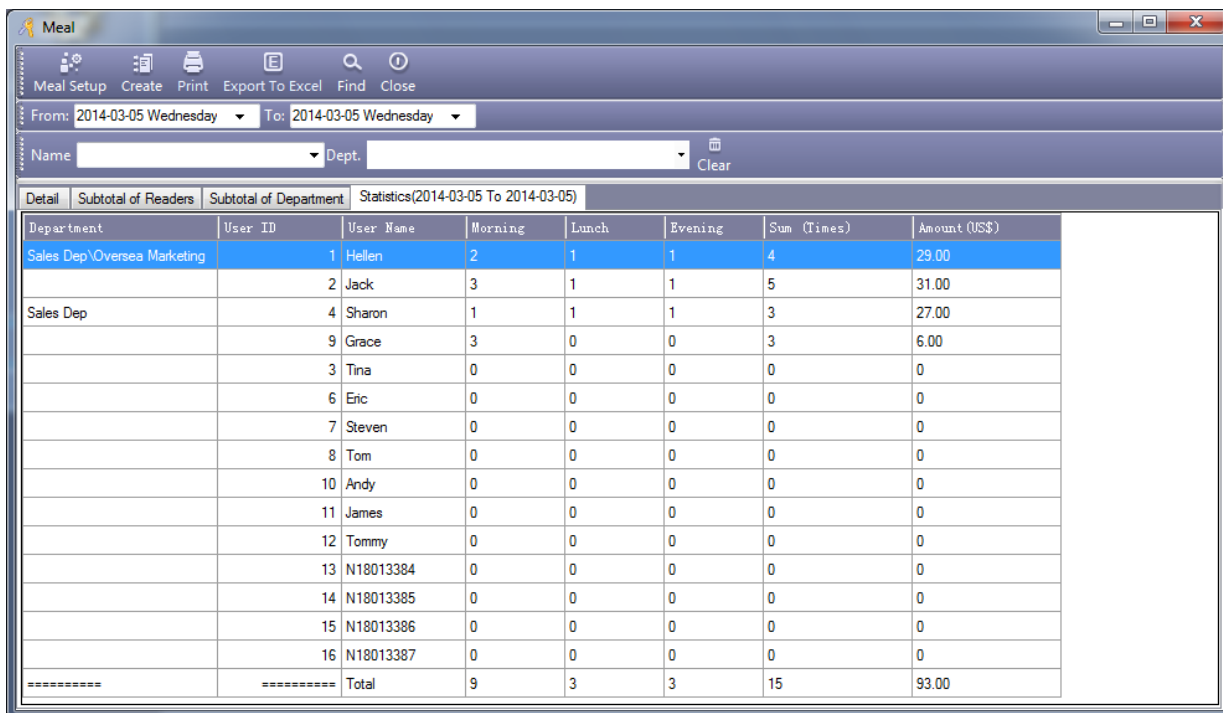

### 3.4.2 Activate Patrol


Enter the “Extended Function”, In front of “Activate Meal” mark this  with  to activate this function. After Active this function , Re-login software. Click **【Patrol】** .

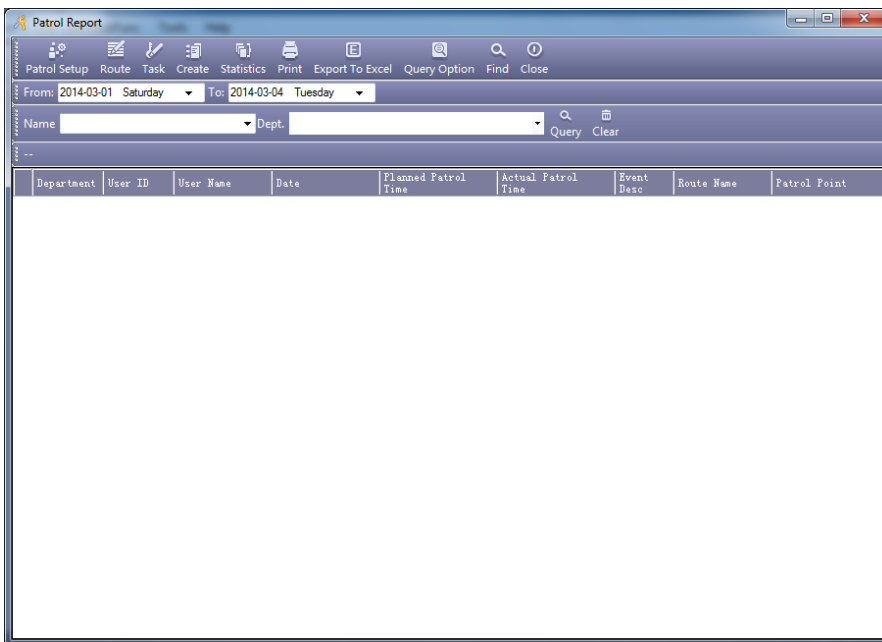

### 3.4.2.1 Patrol Setup


#### 3.4.2.1.1 Patrol Point

Click “Patrol Setup”, At the patrol interface.  
 Eg: Set “Entrance Door” is a Patrol Point.

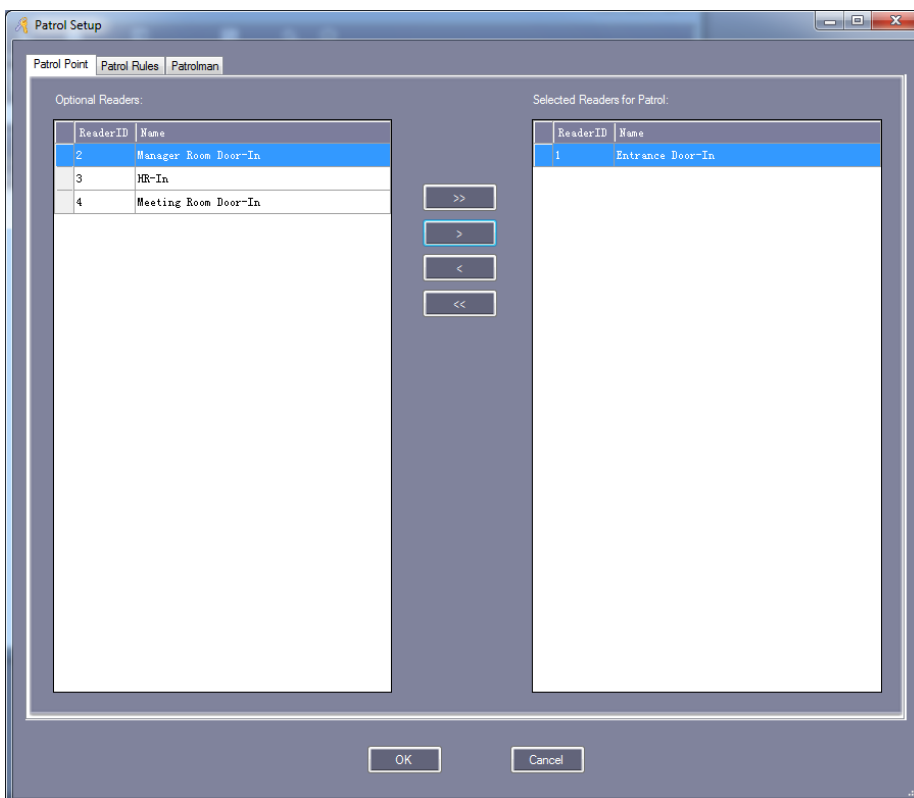

#### 3.4.2.1.2 Patrol Rules


Click “Patrol Setup”, At the patrol interface, Select “Patrol Rules” and set recording to your actually rules.

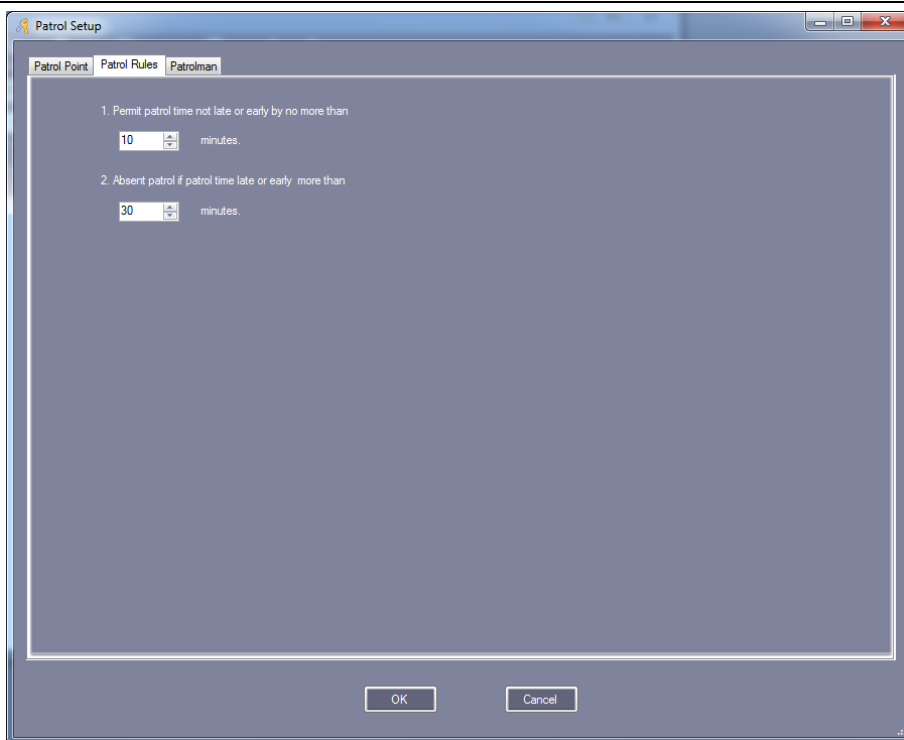

### 3.4.2.1.3 Patrolman


Click “Patrol Setup”, At the patrol interface, Select “Patrolman”.

Eg : Set “Tom” is a Patrolman.

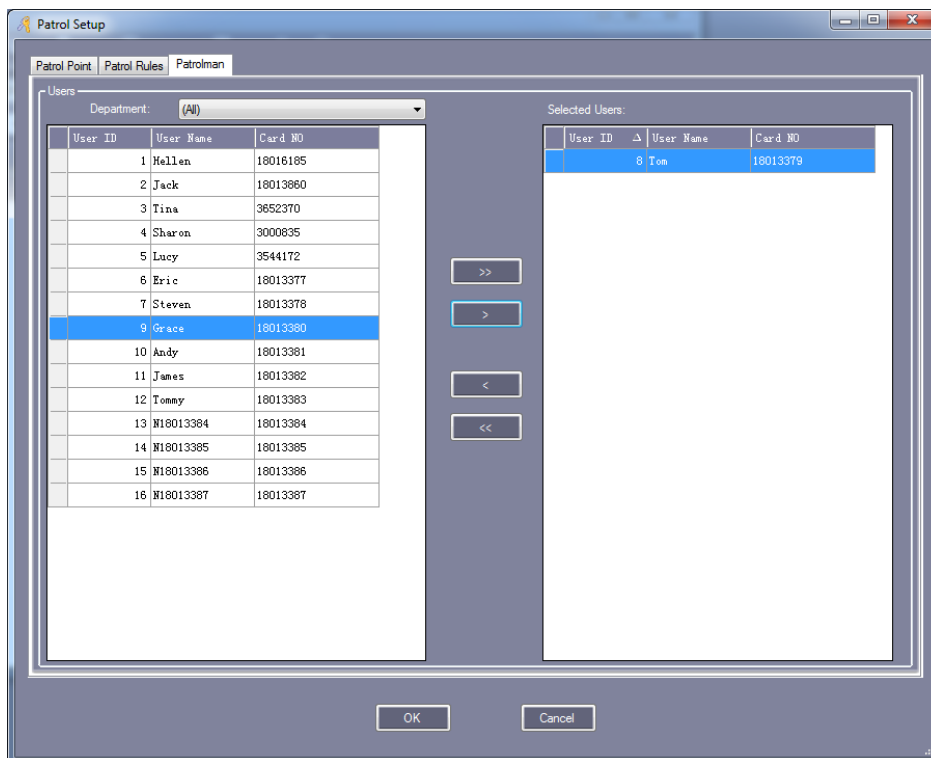


### 3.4.2.2 Patrol Route

Click “Route”, At the patrol interface.

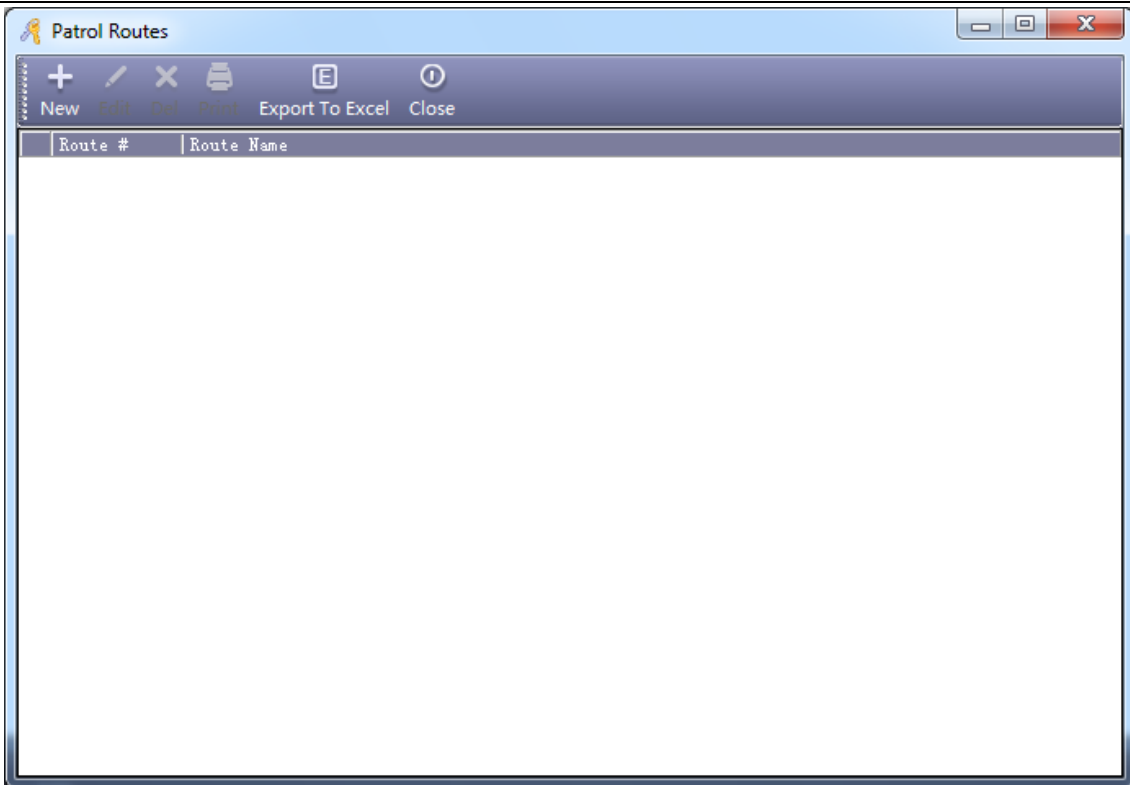

Click "New", Add the Patrol Route.

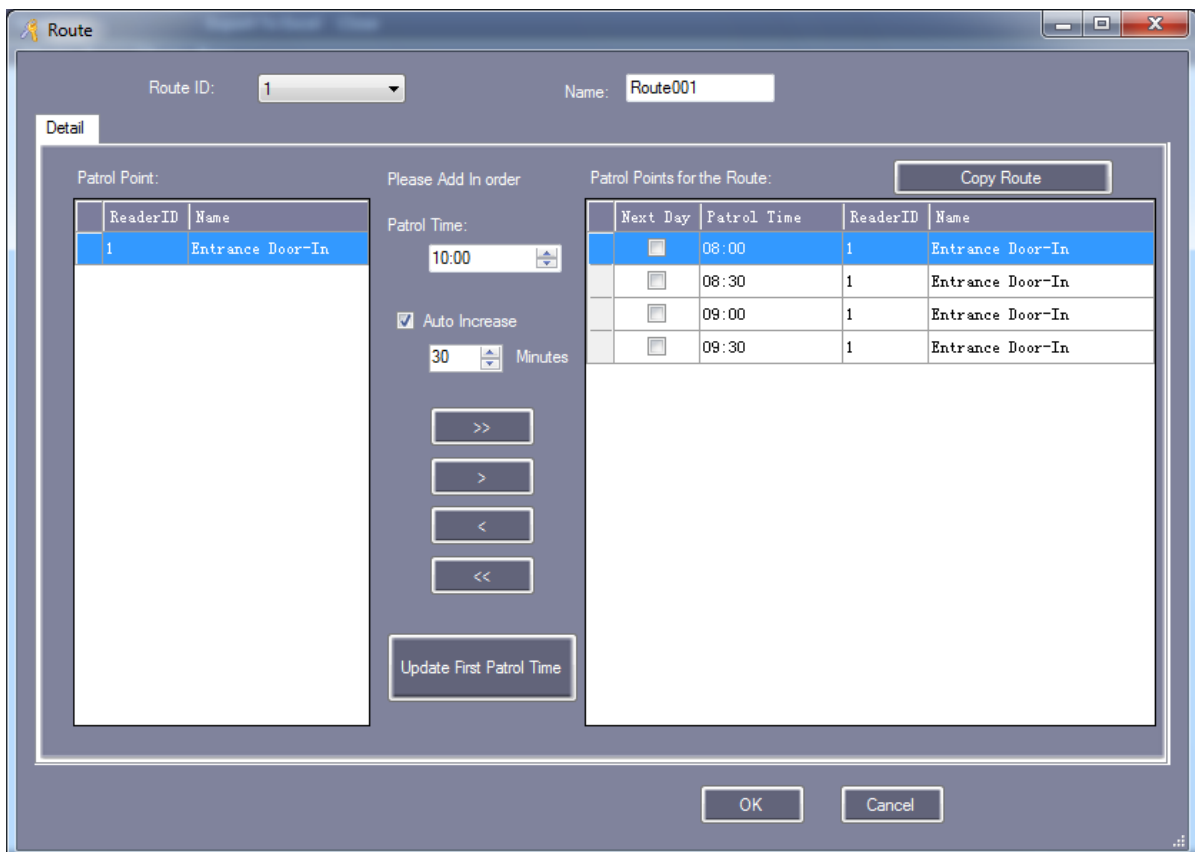


### 3.4.2.3 Patrol Task

Click "Task", At the patrol interface.

Eg: Set Tom's patrol route




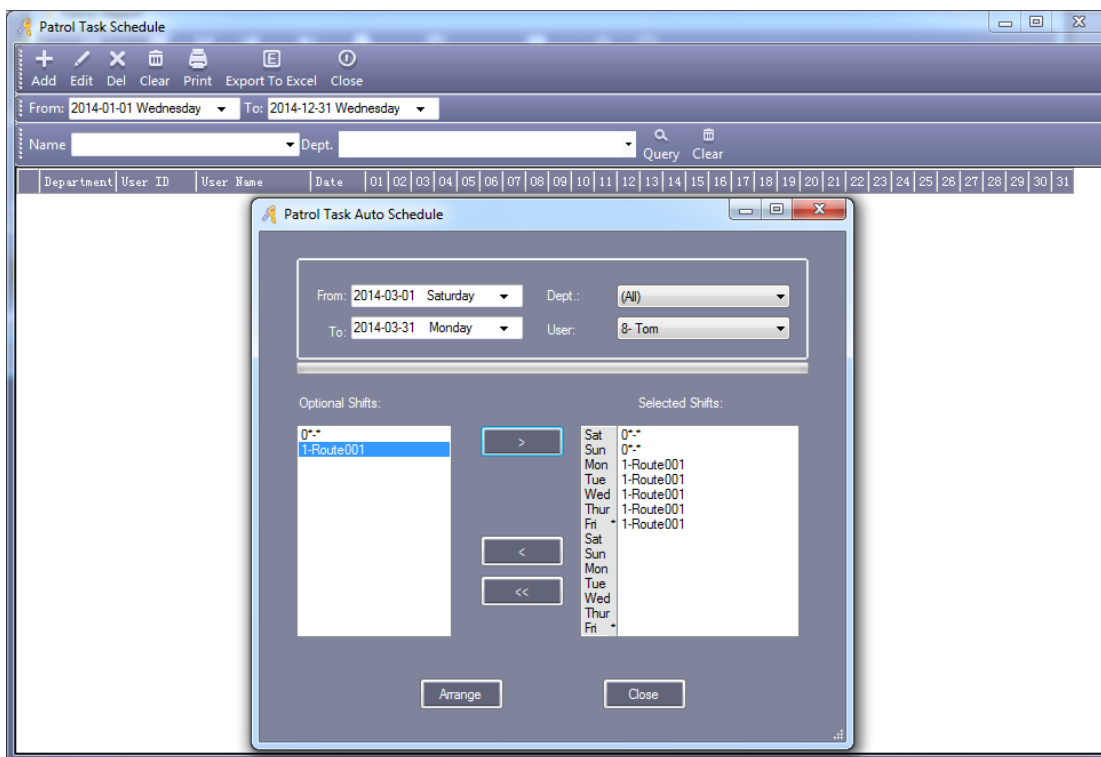


### 3.4.2.4 Patrol Report

Please Get Records Before Creating Report.

Click “Create”, At the Patrol interface ,

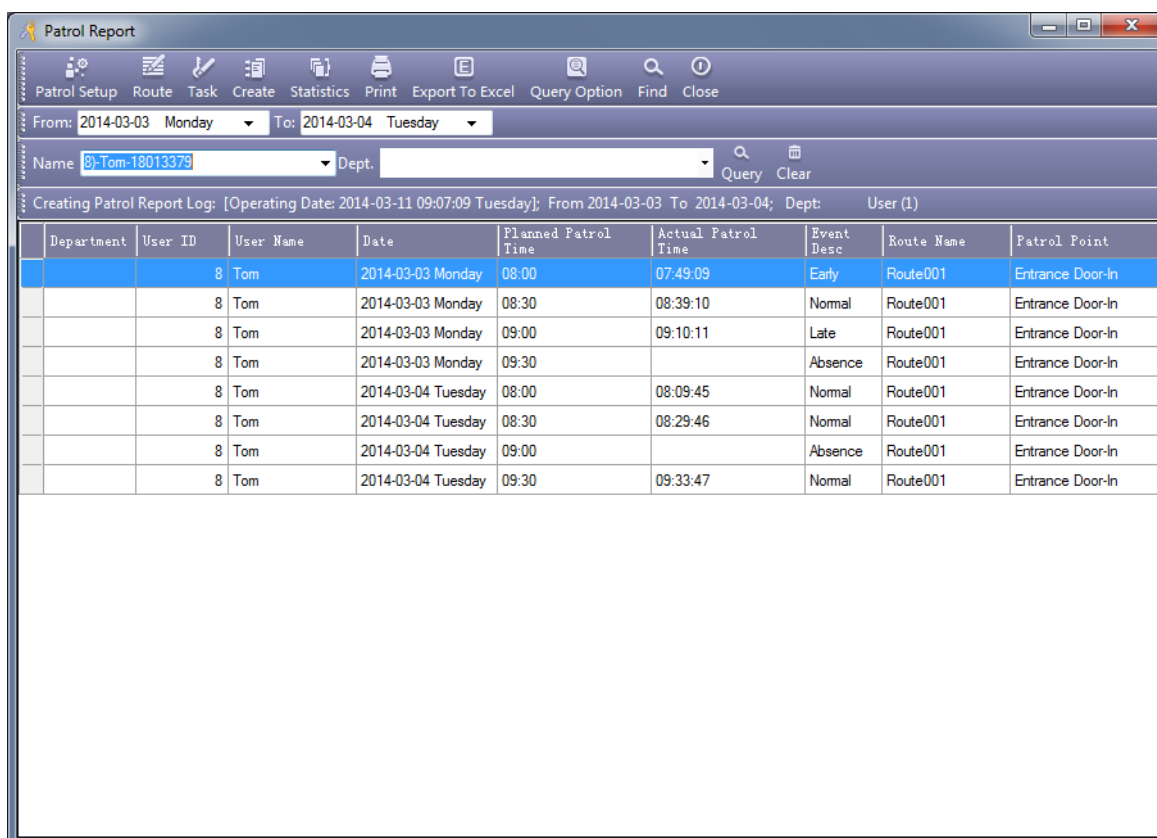


Click “Query Option”, Query “Event Desc”.

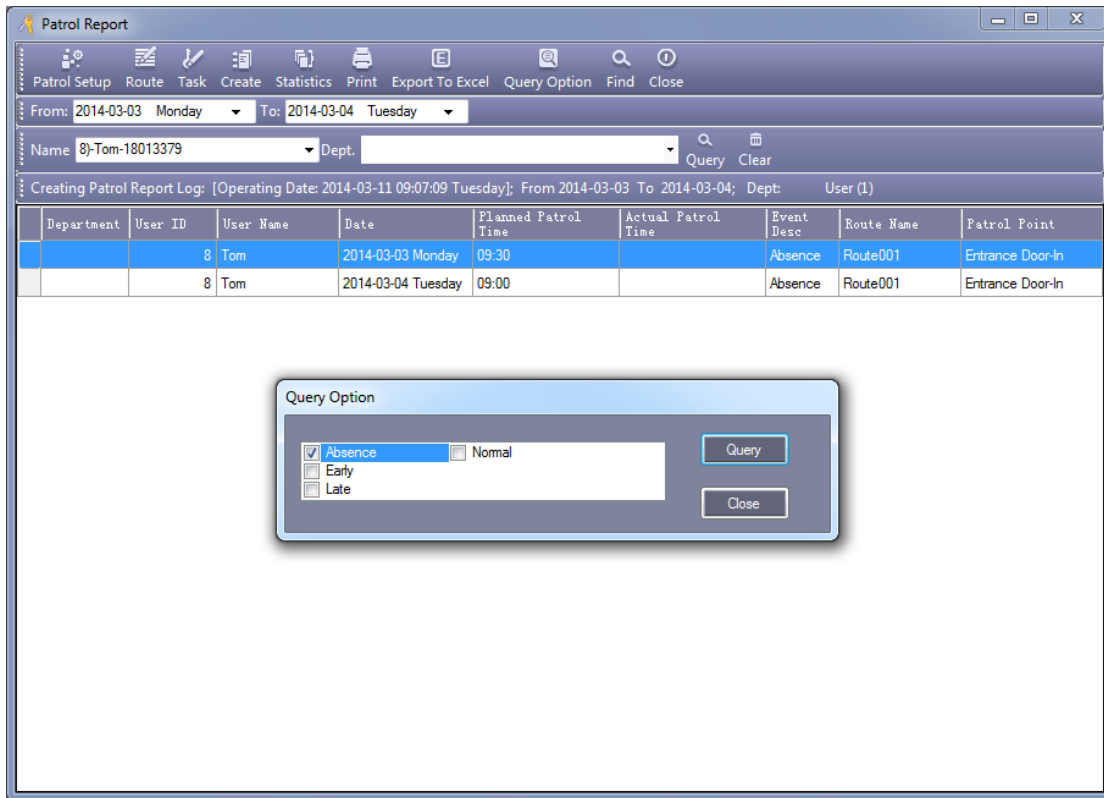


### 3.4.2.5 Patrol Statistics

Click “Statistics”, At the Patrol interface .  
 Statistics Patrolman of the Event Desc.

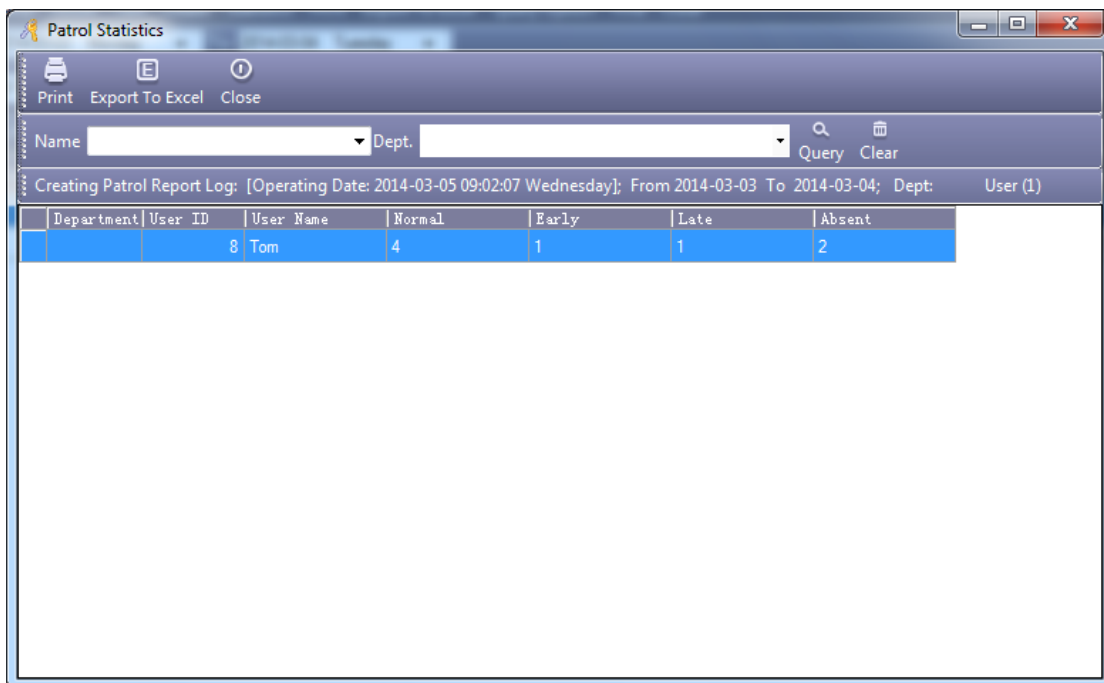


### 3.4.3 Activate Meeting

Enter “Extended Function”, In front of “Activate Meeting” mark this  with  to activate this function.  
 After Active this function , Re-login software. Click 【Meeting Sign】 .

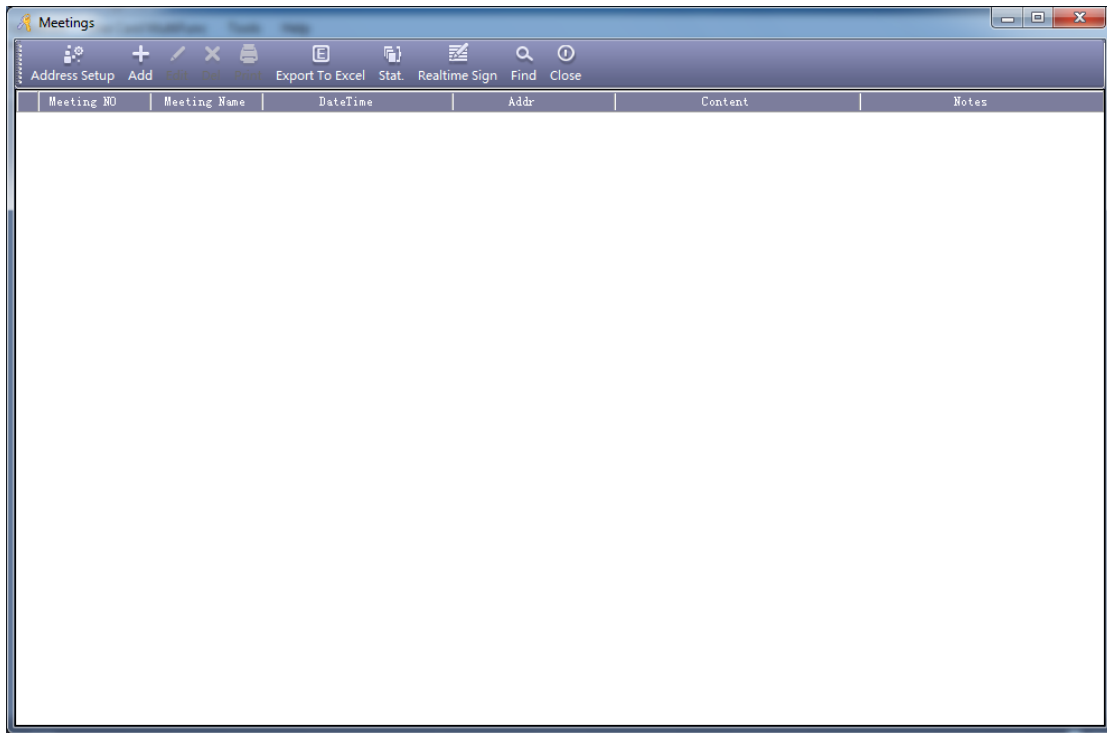


### 3.4.3.1 Address Setup

Click "Address Setup", Enter into the Address Setup interface.

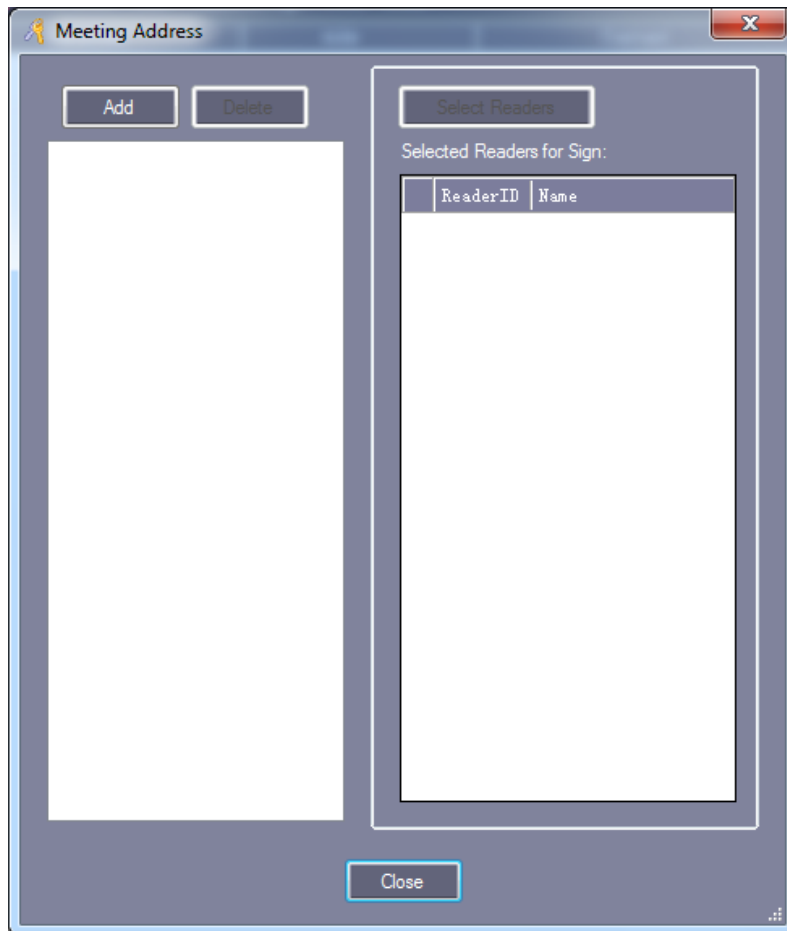

Click "Add" to add the Meeting Address.

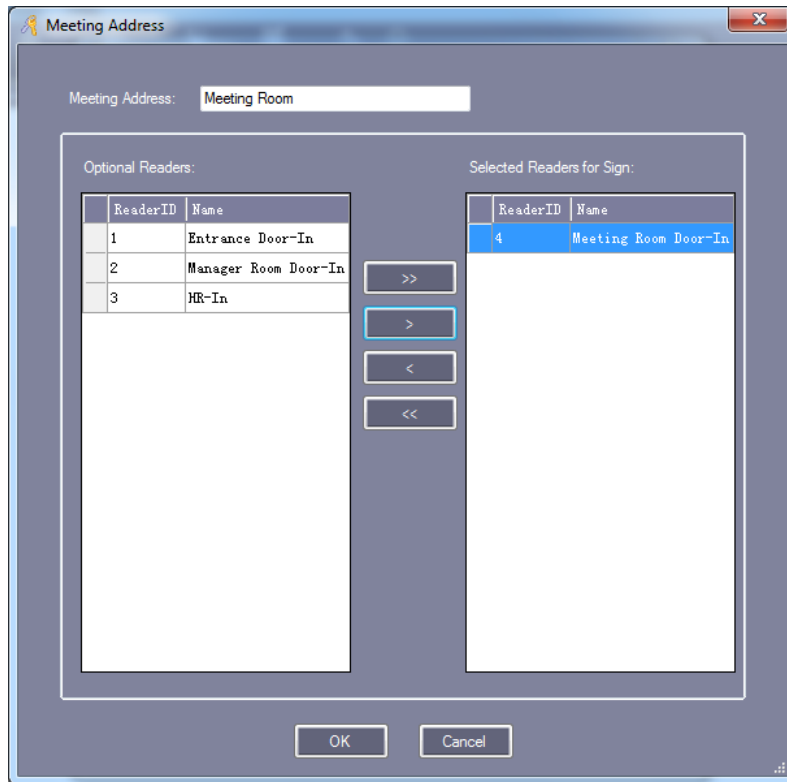


You must input a "Name" at the "Meeting Address."

### 3.4.3.2 Add Meeting

Click "Add", At the meeting interface.

Eg: Add "Weekly Meeting".

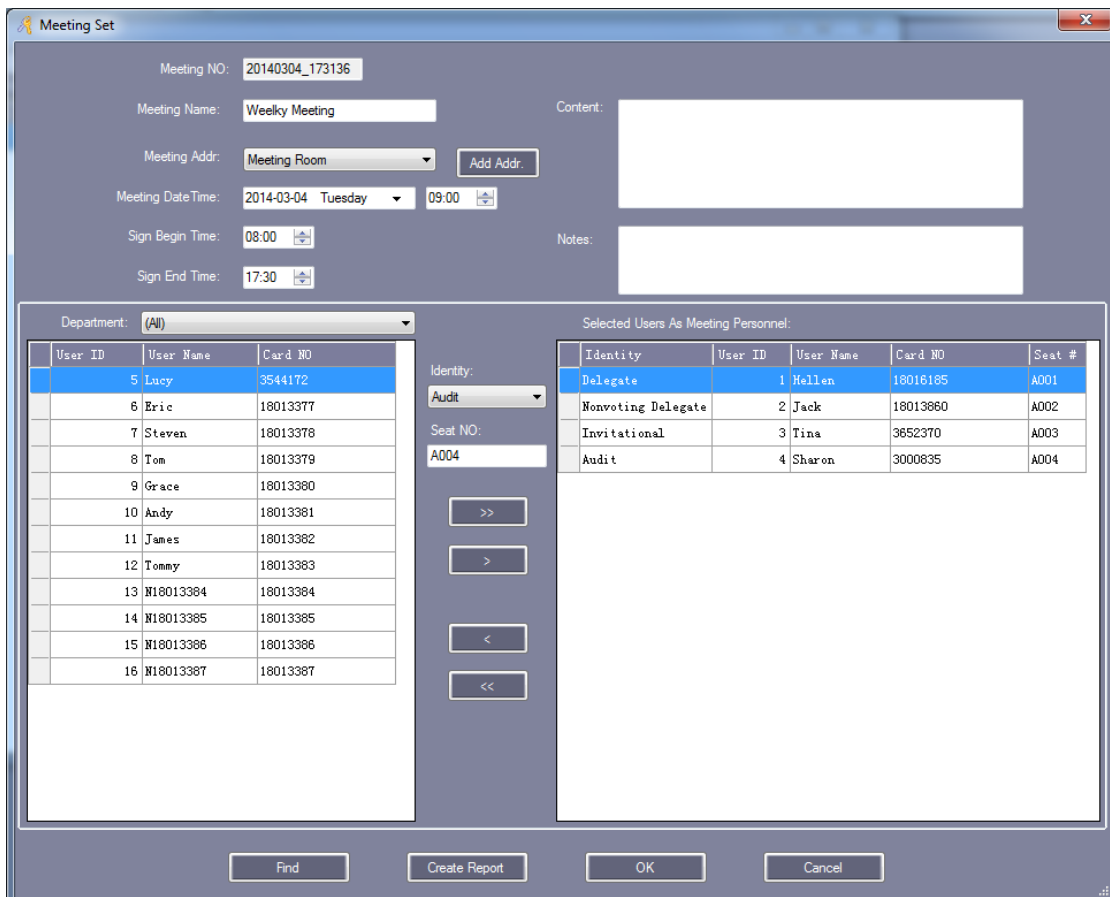


【Identity】 : Have "Delegate"、"Nonvoting Delegate" 、"Invitational" 、"Audit"、"Employee" 、"Other"

Modify the meeting, Click “Edit”, At the meeting interface.

Delete meeting, Click “Delete”, At the meeting interface.

### 3.4.3.3 Meeting Stat

Click “Stat”, Detailed statistical a single meeting attendance. Can statistical “Should” 、”In Fact” 、”Leave” 、”Absent” 、”Late” 、”Total statistical” and “Calculate participants rate”.

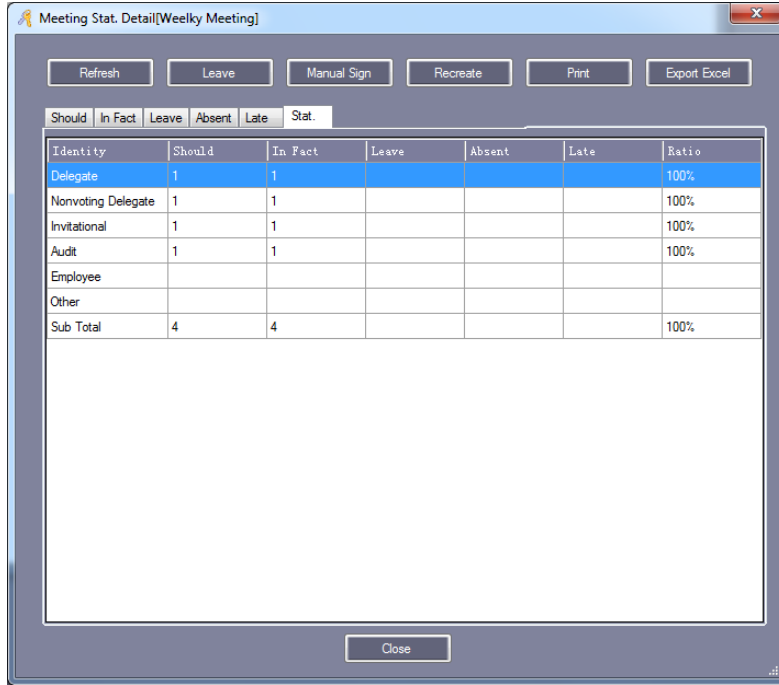

### 3.4.3.4 Realtime Sign

Click “Real –time Sign”, Real –time attendance of the meeting.




### 3.4.4 Activate One To More

Into the “Extended Function”, In front of “Activate One To More” mark this  with  to activate this function.


### 3.4.4.1 Add One To More Controller

Click **【Configuration】** > **【Controllers】** ,Click “New”.

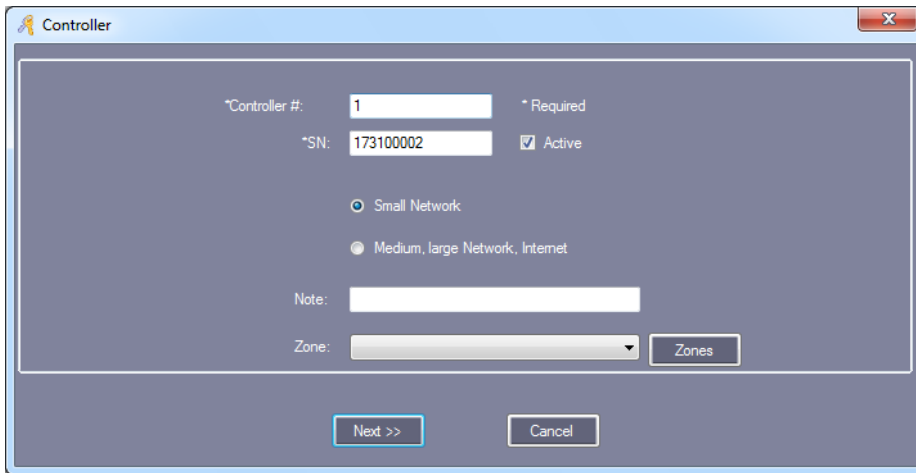


The details please reference chapter [2.2 Parameter Settings of Equipment](#).

Click “Next”.

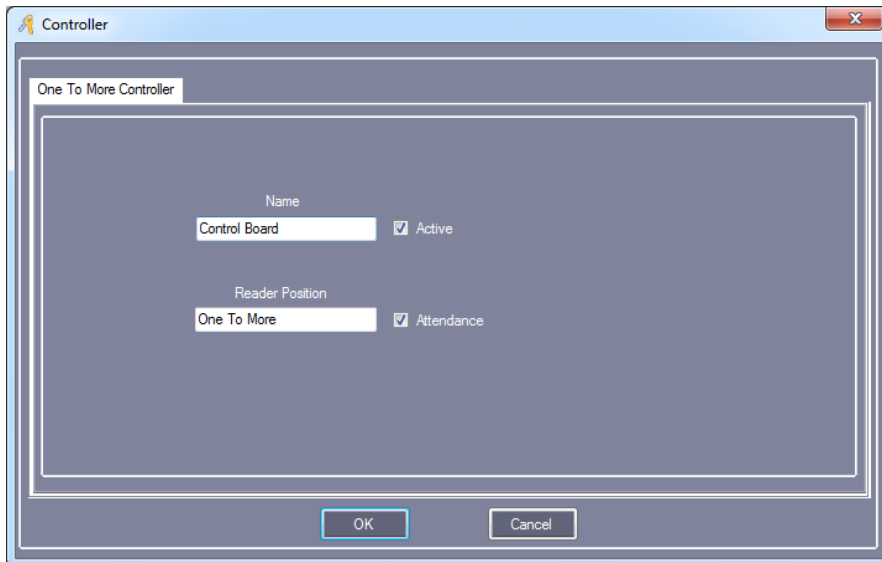

Click “OK”.

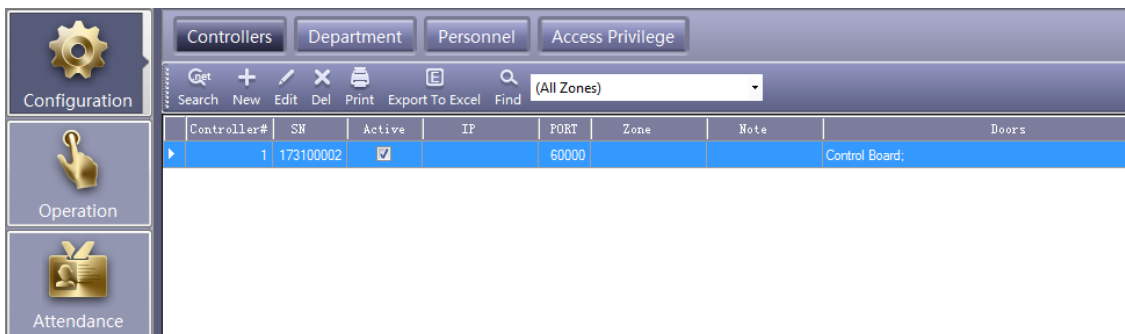

### 3.4.4.2 One To More Management

Click **【One To More】** .

User ID	User Name	Card NO	Department	Privilege
1	Hellen	18016185	Sales Dep\Oversea Marketing	
2	Jack	18013860		
3	Tina	3652370		
4	Sharon	3000835	Product Dep	
5	Lucy	3544172	Sales Dep	
6	Eric	18013377		
7	Steven	18013378		
8	Tom	18013379		
9	Grace	18013380		
10	Andy	18013381		
11	James	18013382		
12	Tommy	18013383		
13	N18013384	18013384		
14	N18013385	18013385		
15	N18013386	18013386		
16	N18013387	18013387		

### 3.4.4.2.1.Door Management

Click “Configure”, Enter into the door management interface.

Configure

\*Door Name:

Controller:

Door-Relay No.:


Change Name    Add    Delete    Close

Door Fullname	Controller	Door-Relay No.

Door Name: Click can be modified. Default value is "\_1 D" and the corresponding Floor-Relay NO."1"


**【Add Door】**

Fill in “Door Name”, select “Controller” and “Door-Relay NO”, Click “Add”. If you do not need to re-fill, Click “Add”.

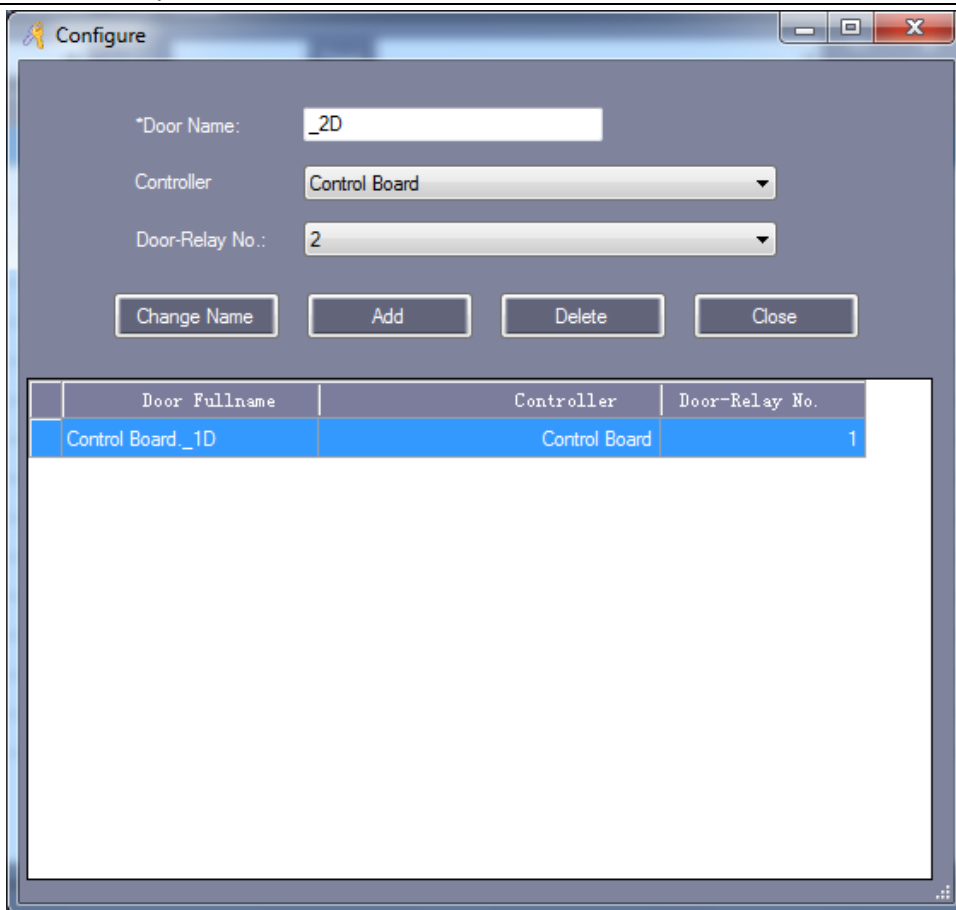


### 3.4.4.2.2 Set user up to door

Fist selected user, Then click "Privilege".  
 Example: Set "Hellen" up to "1 Door".

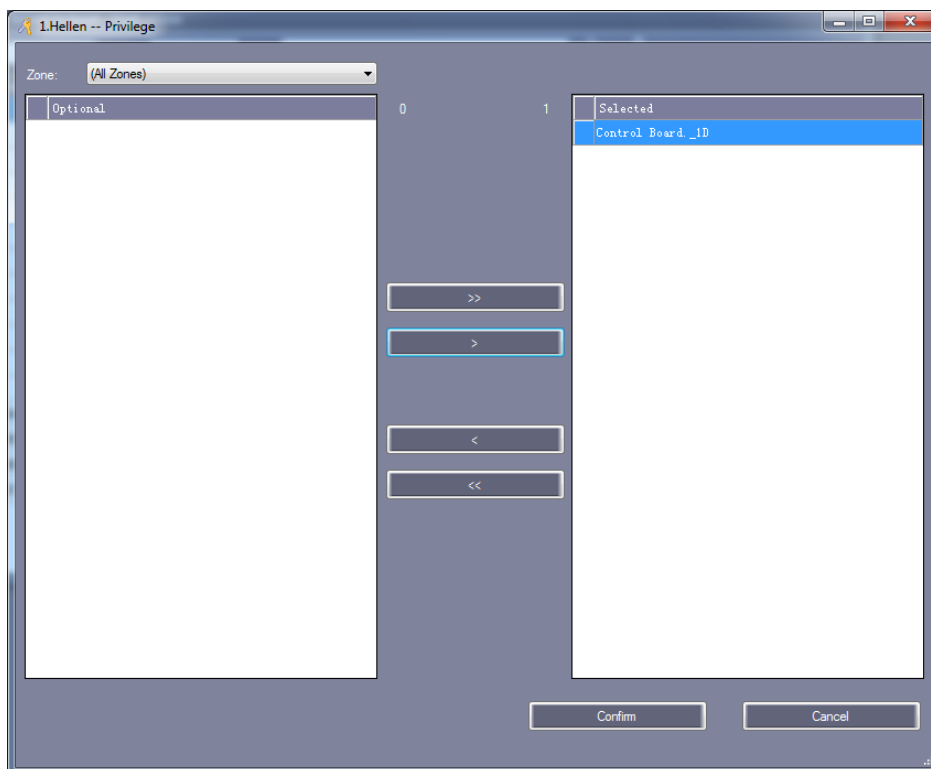


Click "Confirm", Back to "Console" click "Upload". Then Swiping Card, "Hellen" will be enter into 1 door.



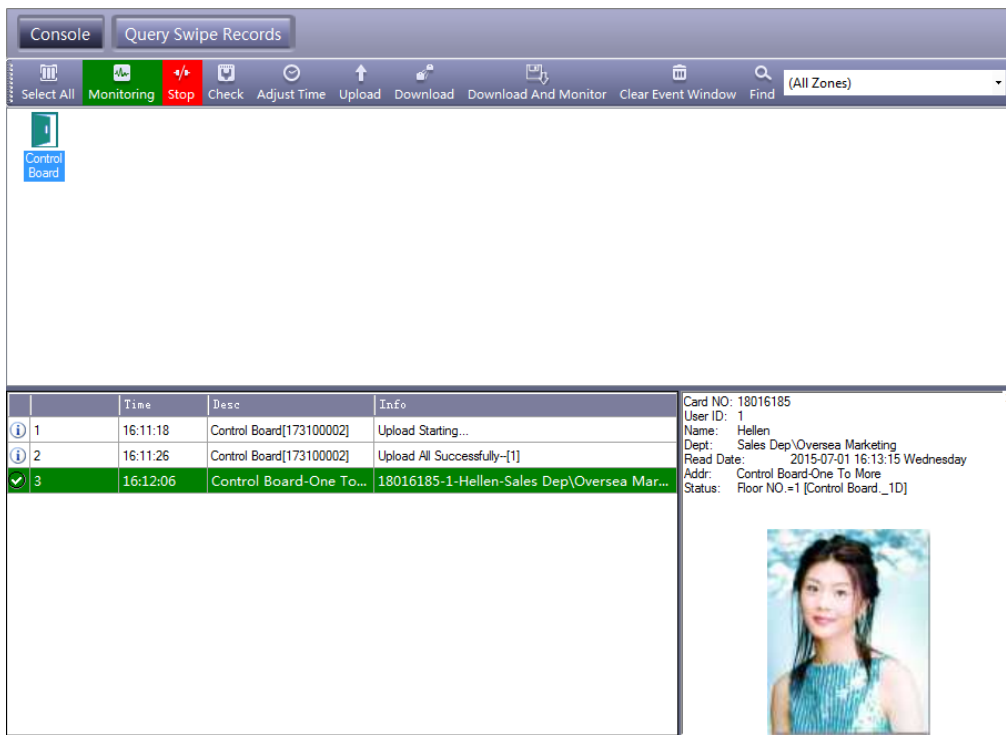


### 3.5 Tools

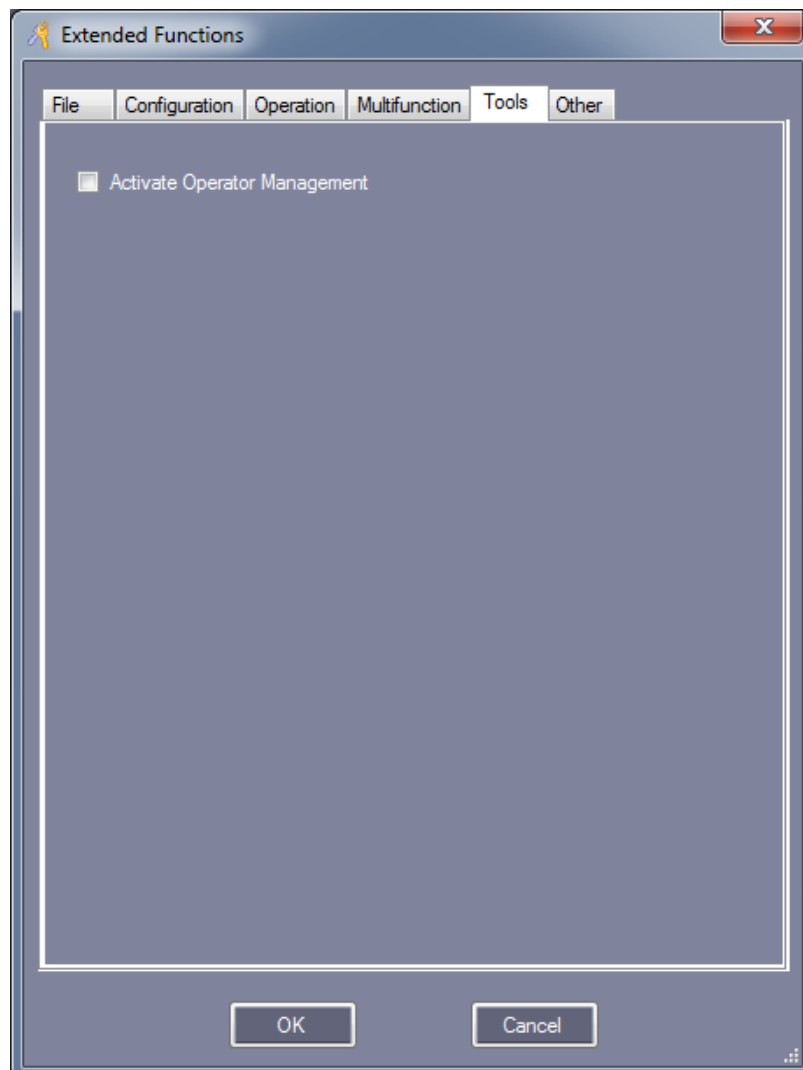

### 3.5.1 Activate Operator Management

Click **【Tools】** > **【Operator Management】**

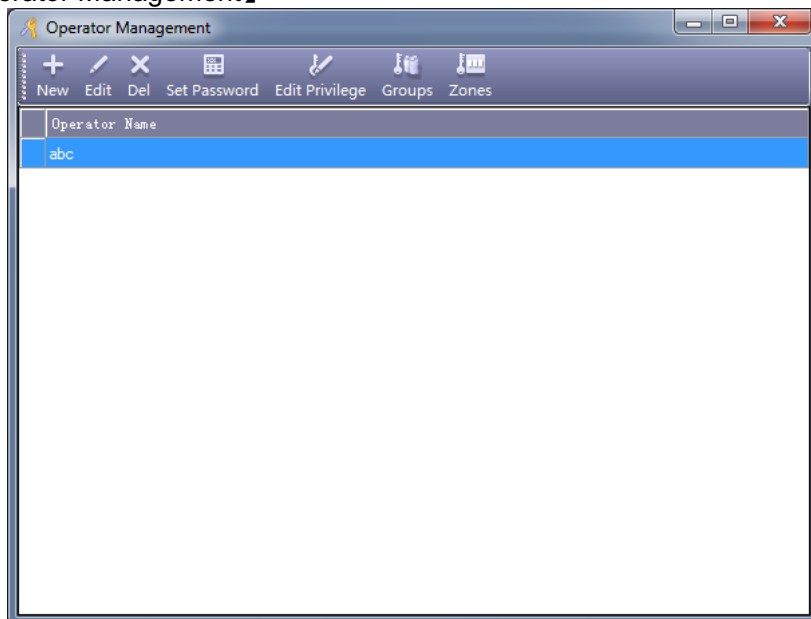

You can use the “New”, “Edit”, ”Del” , “Edit Privilege” , “Groups” and “Zones” for the operator.




**Edit Privilege**: assign the executive operation and function privilege to operators.

Attention: “abc” is the default high-level Administrators, can not “Del” and “Edit Privilege”.


## Part 4: Attendance

The Access Control System has activated the Attendance by default. If you want cancel this function ,please select **【Extended Functions】** > **【One Card Multifunction】** > **【Don't Display Attendance】**

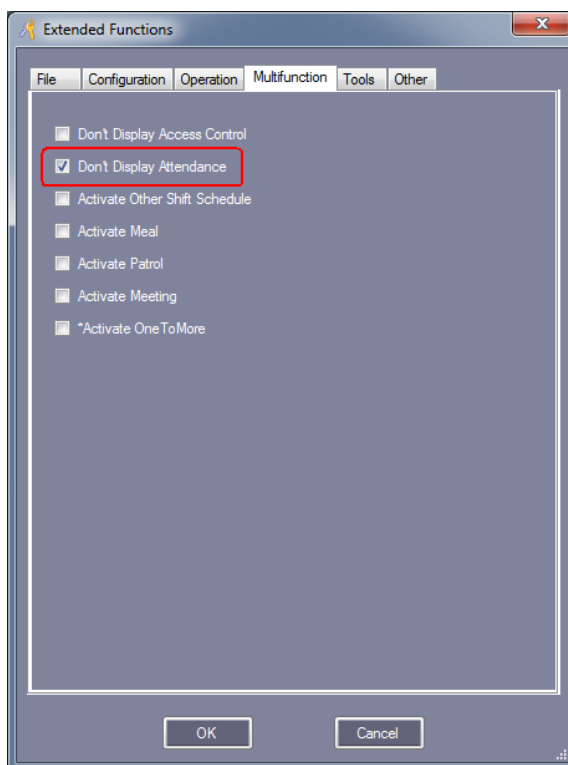

## 4.1 Normal Shift Rules

Click **【Attendance】** > **【Normal Shift Rules】**

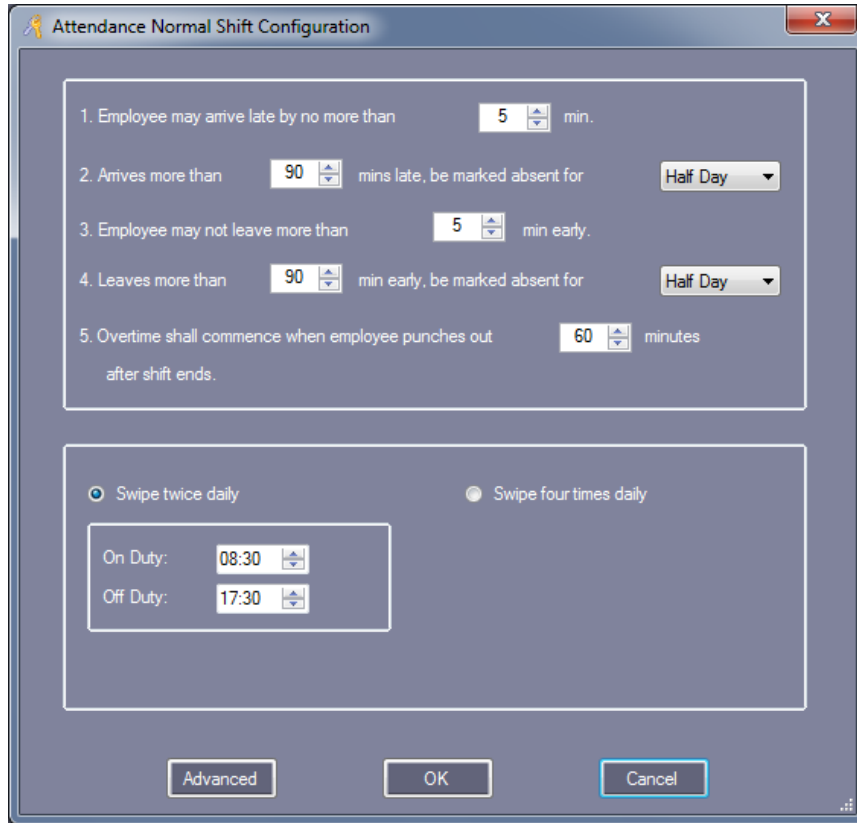

The dialog box is titled "Attendance Normal Shift Configuration". It contains five numbered settings:

- Employee may arrive late by no more than  min.
- Arrives more than  mins late, be marked absent for .
- Employee may not leave more than  min early.
- Leaves more than  min early, be marked absent for .
- Overtime shall commence when employee punches out  minutes after shift ends.


Below these settings are two radio buttons:  Swipe twice daily and  Swipe four times daily.

At the bottom, there are two time input fields: "On Duty:" with  and "Off Duty:" with .

At the bottom of the dialog are three buttons: "Advanced", "OK", and "Cancel".

## 4.2 Holiday

Click **【Attendance】** > **【Holiday】**

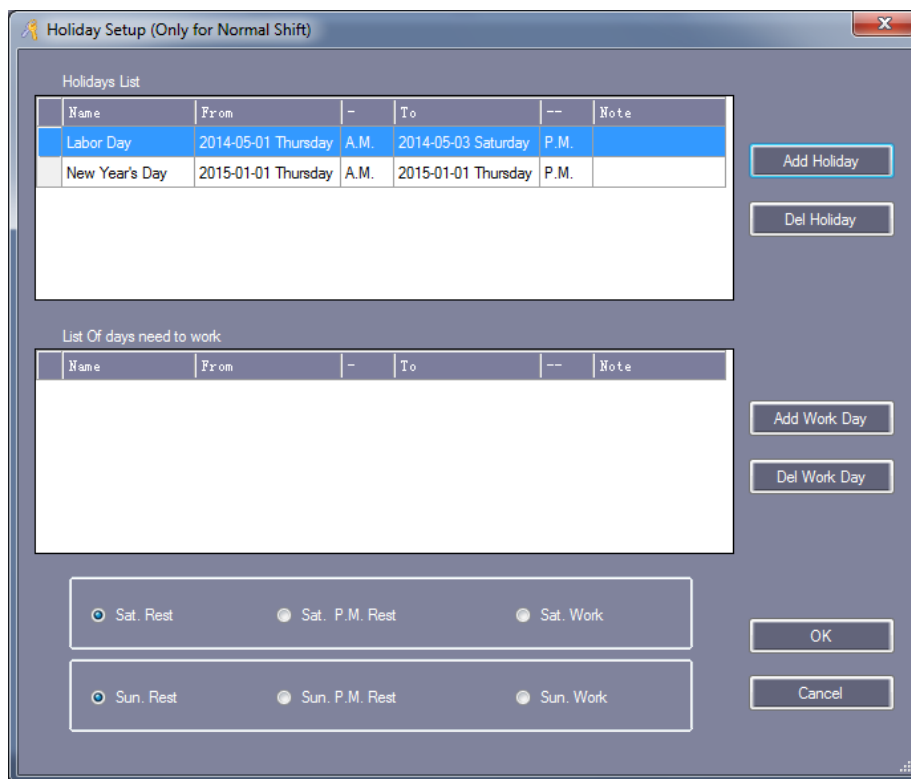

The dialog box is titled "Holiday Setup (Only for Normal Shift)". It features two tables and several control elements.

**Holidays List**

Name	From	-	To	--	Note
Labor Day	2014-05-01 Thursday	A.M.	2014-05-03 Saturday	P.M.	
New Year's Day	2015-01-01 Thursday	A.M.	2015-01-01 Thursday	P.M.	

Buttons: Add Holiday, Del Holiday

**List Of days need to work**

Name	From	-	To	--	Note

Buttons: Add Work Day, Del Work Day


Radio buttons for Saturday:  Sat. Rest,  Sat. P.M. Rest,  Sat. Work

Radio buttons for Sunday:  Sun. Rest,  Sun. P.M. Rest,  Sun. Work

Buttons: OK, Cancel



### 4.3 Leave/Business Trip

Click **【Attendance】** > **【Leave/Business Trip】**

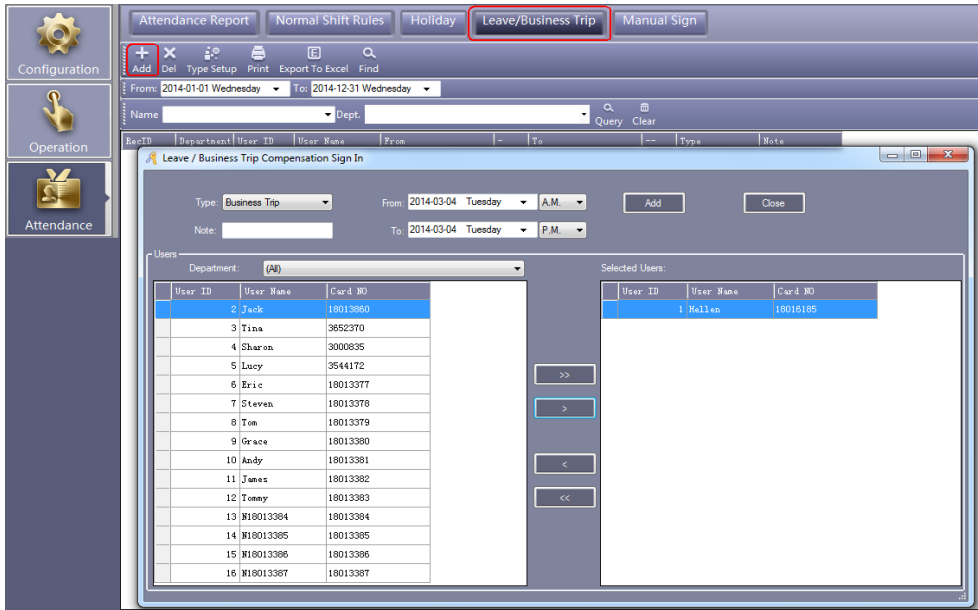

### 4.4 Manual Sign In

Click **【Attendance】** > **【Manual Sign In】**

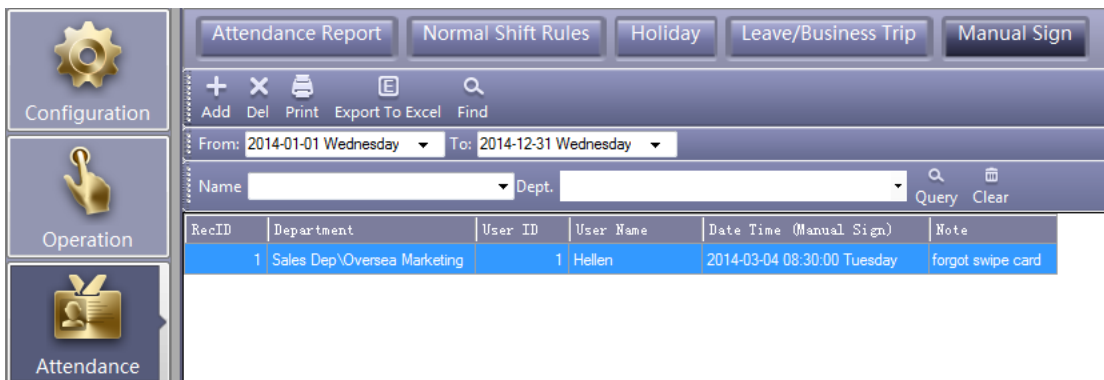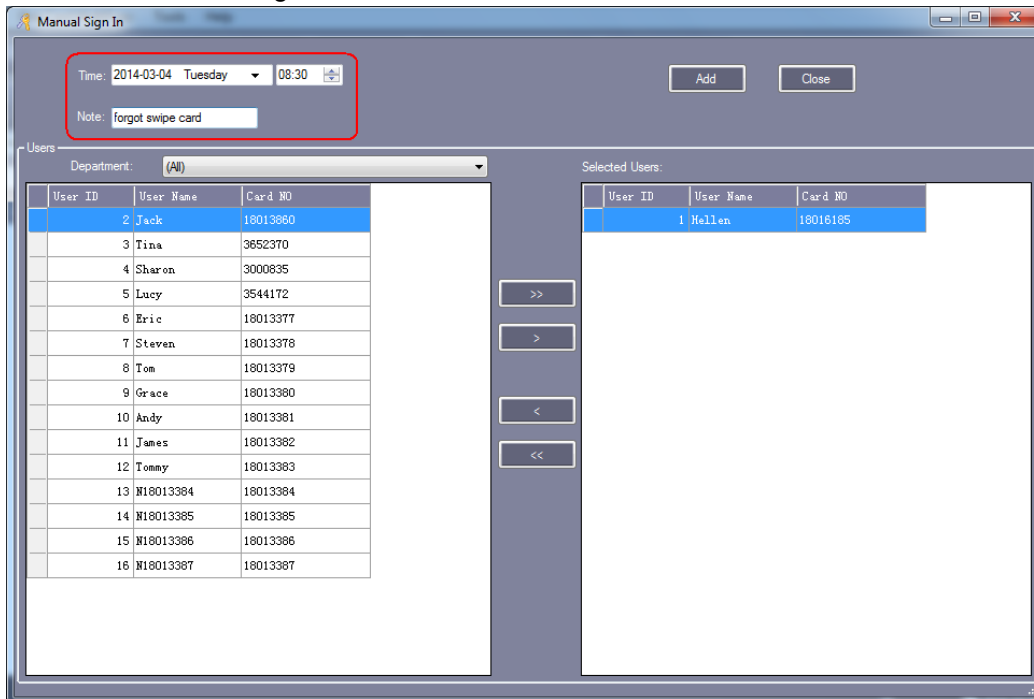

## 4.5 Attendance Report

Click **Attendance** > **Attendance Report**

Click "Create"

Department	User ID	User Name	Date	A. M. OnDuty	On Desc	P. M. OffDuty	Off Desc	Late min	Leave min	Overtime (hr)	Absent Days	Not Swipe
Sales Dep\Oversea Marketing	1	Hellen	2014-03-01 Saturday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-02 Sunday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-03 Monday	08:02:24		17:32:46						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-04 Tuesday	08:12:25		17:32:47						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-05 Wednesday	08:35:26	Arrive late	17:32:48		5				
Sales Dep\Oversea Marketing	1	Hellen	2014-03-06 Thursday	08:05:27		17:32:49						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-07 Friday	08:06:28		17:32:51						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-08 Saturday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-09 Sunday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-10 Monday	08:02:29		17:32:52						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-11 Tuesday	08:25:30		17:24:53	LeaveEarly	5				
Sales Dep\Oversea Marketing	1	Hellen	2014-03-12 Wednesday	08:24:31		17:32:54						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-13 Thursday	08:25:33		17:32:55						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-14 Friday	08:22:34		17:32:56						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-15 Saturday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-16 Sunday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-17 Monday	08:12:35		17:32:57						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-18 Tuesday	08:02:36		17:32:58						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-19 Wednesday	08:20:37		17:32:59						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-20 Thursday	08:22:38		15:30:00	Absent				0.5	
Sales Dep\Oversea Marketing	1	Hellen	2014-03-21 Friday	08:22:39		17:33:01						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-22 Saturday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-23 Sunday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-24 Monday	08:05:40		17:33:02						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-25 Tuesday	08:25:41		17:35:01						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-26 Wednesday	08:25:42		17:35:03						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-27 Thursday	08:15:44		17:35:04						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-28 Friday	08:18:44		17:35:05						
Sales Dep\Oversea Marketing	1	Hellen	2014-03-29 Saturday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-30 Sunday		*		*					
Sales Dep\Oversea Marketing	1	Hellen	2014-03-31 Monday	08:25:45		17:30:00	Manual Sign					

Click "Statistics"

The screenshot shows the 'Attendance Statistics' window. At the top, there are menu options: Print, Export To Excel, Find, and Close. Below that, there are search fields for Name and Dept, and buttons for Query and Clear. The main area displays a report for 'User (1)' with the following data:

Department	User ID	User Name	Planned Days	Full Work Days	Late Minutes	Late Count	Leave Ea Minutes	Leave Ear Count	Over (hr)	Absen Days	Not Swipe	Manual SignIn (Times)	Busine Trip (Days)	Sick Leave (Days)	Privat Leave (Days)
Sales Dep\Oversea Marketing	1	Hellen	21	18	5	1	5	1		0.5		1			

## Part 5: Appendix

### 5.1 How to display user’s photo when Monitoring


If you want to add user’s photo when adding the user, click “Photo” button, and add it.

The screenshot shows the 'User' configuration window. The 'Main' tab is active. The form contains the following fields and options:

- \*User ID: 1 (marked as \* Required)
- \*Name: Hellen
- Card NO: 18016185
- Department: Sales Dep\Oversea Marketing
- Photo: A button labeled 'Photo' next to a photo of a woman (Hellen).
- Attendance
- Access Control
- Activate: 2014-03-03
- Deactivate: 2029-12-31
- Dea. Time: 23:59

At the bottom, there are 'OK' and 'Exit' buttons.


At the monitor window, it can show the user’s photo when the user swiping card.

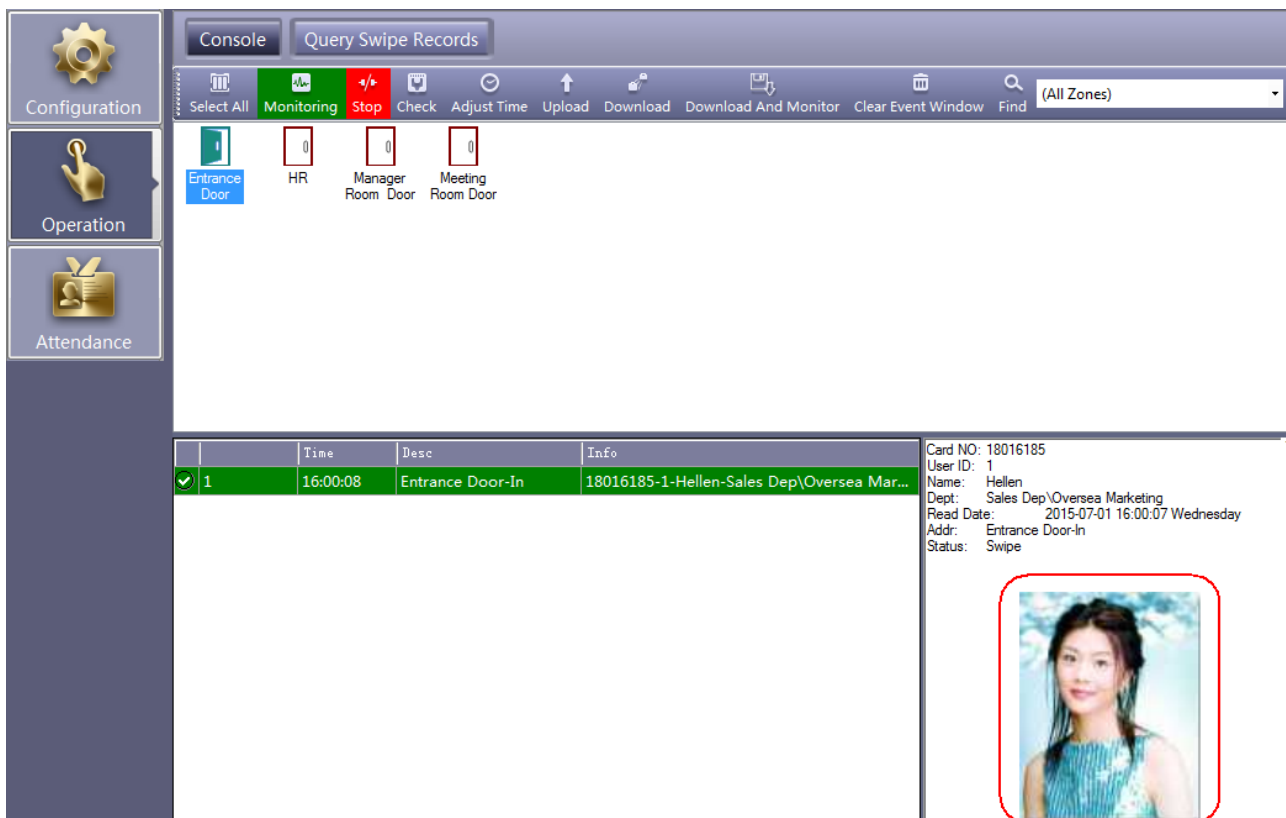


## 5.2 SQL Server Configuration

Install the SQL Server, and then configure Access Control SQL Server.


Click **【Start】** > **【Programs】** > **【Access Control】** > **【SqlSet】**

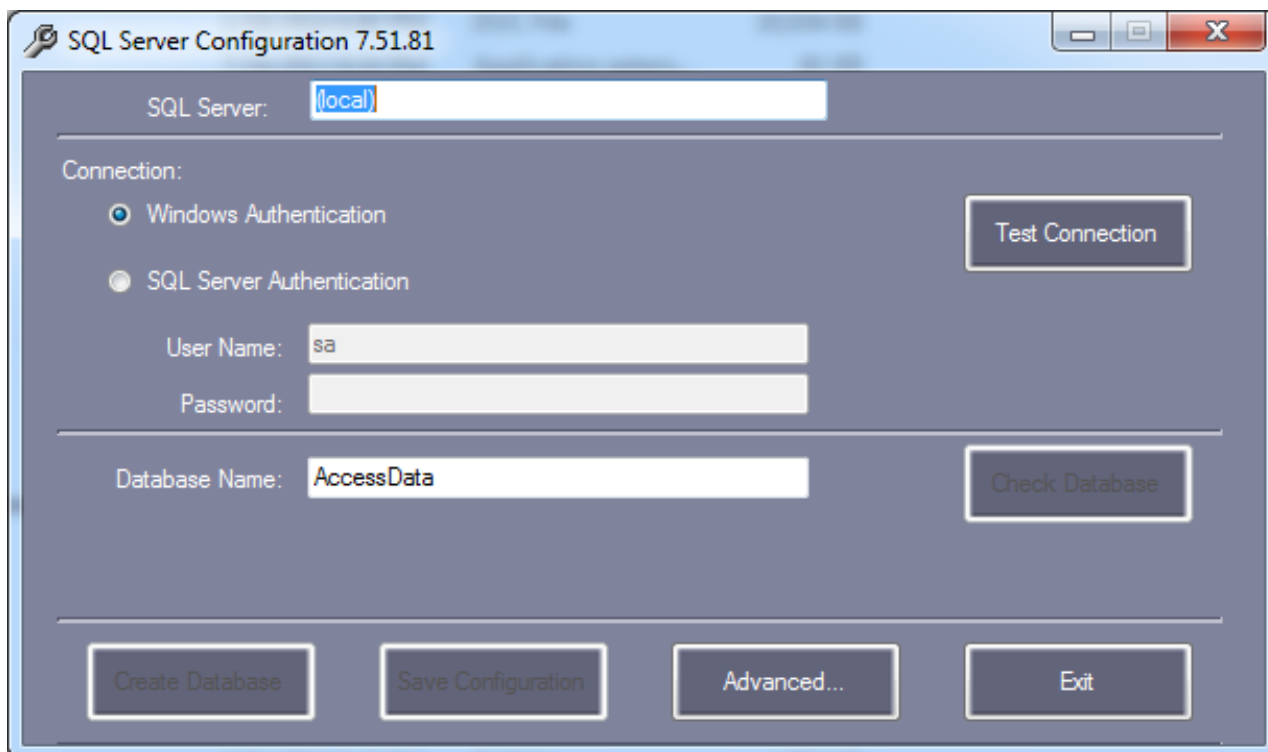


Click "Create Database"

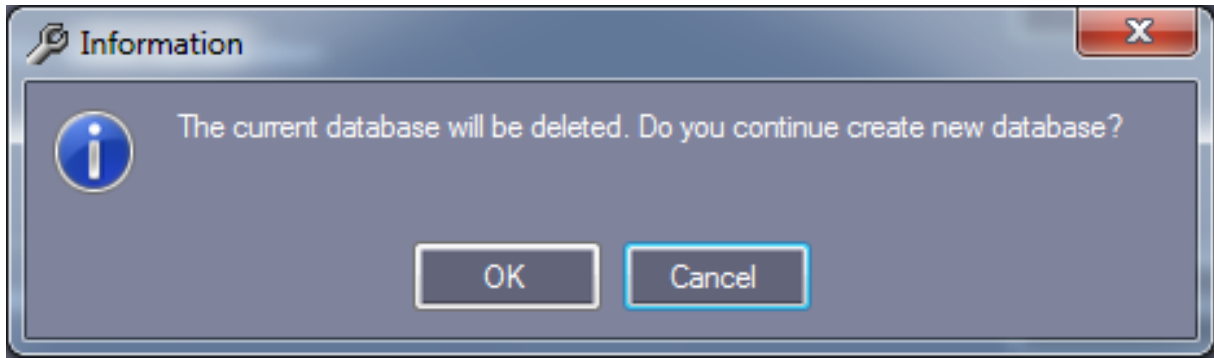


Click "OK"

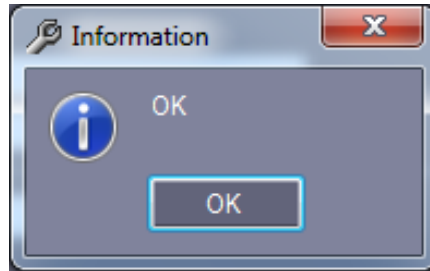

Click "OK", Then Click "Confirm"

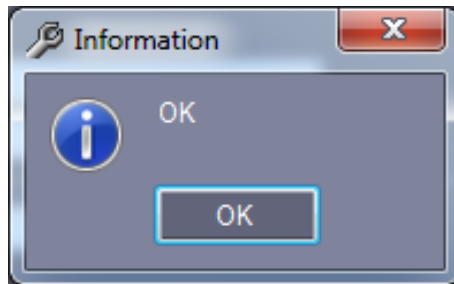

Click "OK", Run Software "Access Control", You can see the created database icon as "SQL:AccessData".

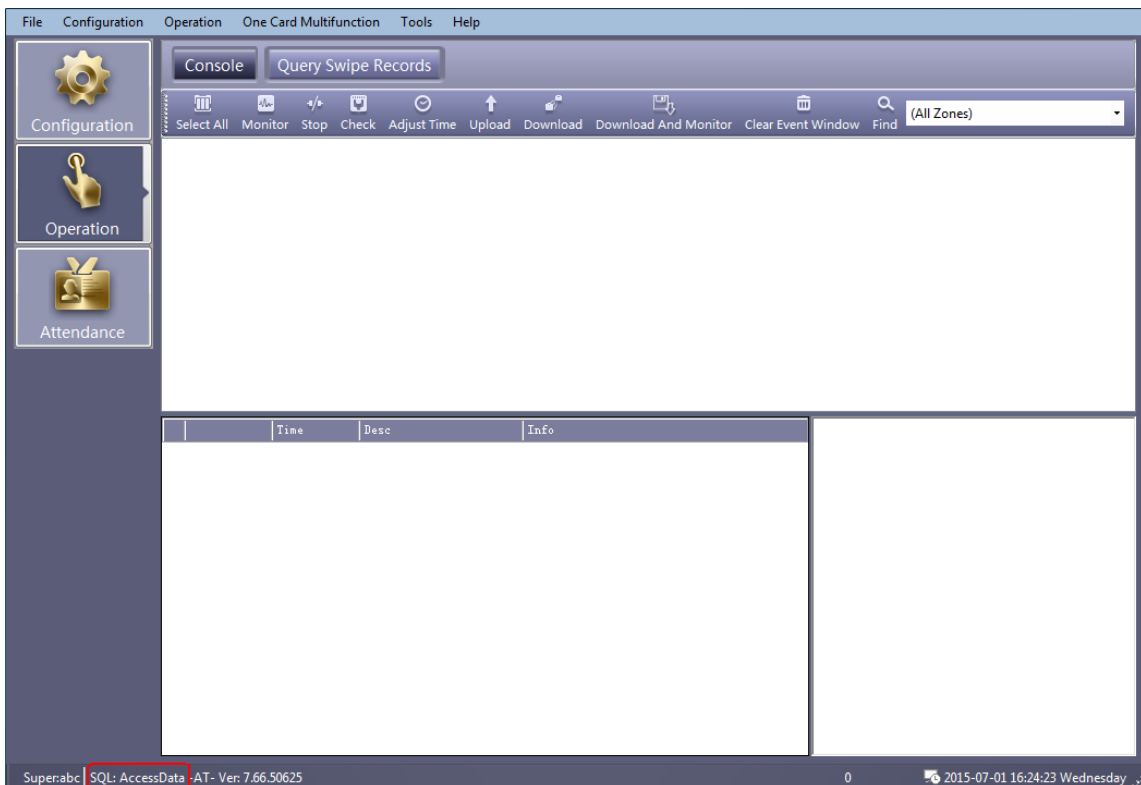




### 5.3 Import consumer's information from Excel


Attention: It can only import valid “Consumer NO”, “Name”, “Card ID” and “Department”.

First “Export To Excel”, Open the document, then export the new users information to Excel table.

Click **【Configuration】** > **【Personnel】** > **【Export To Excel】**

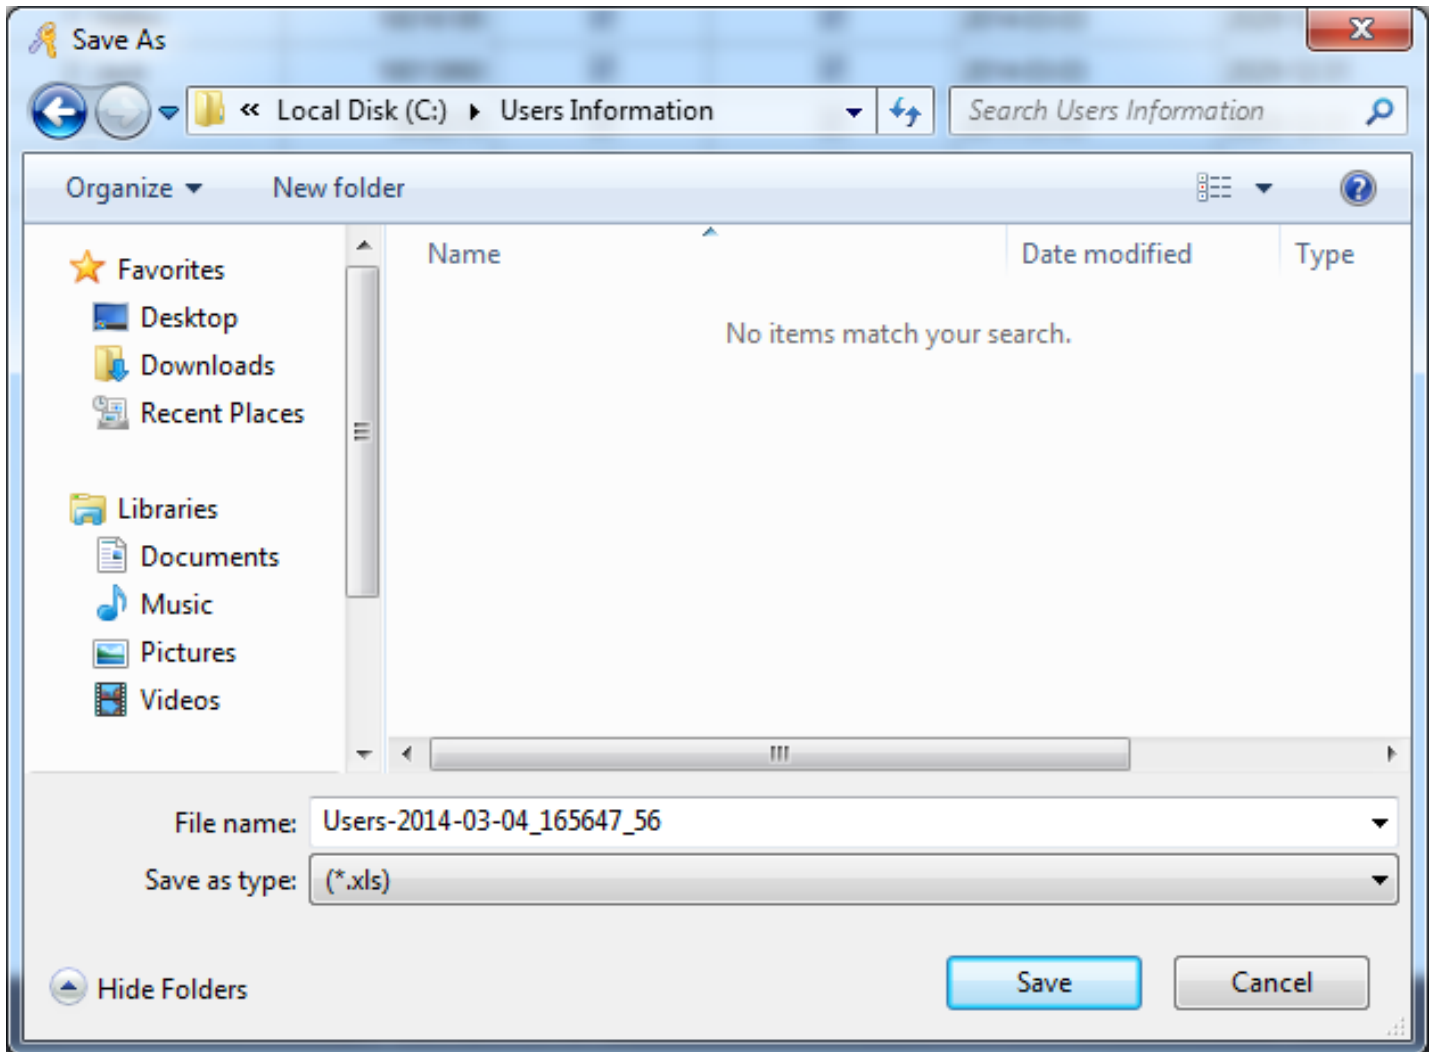

Click “Save”

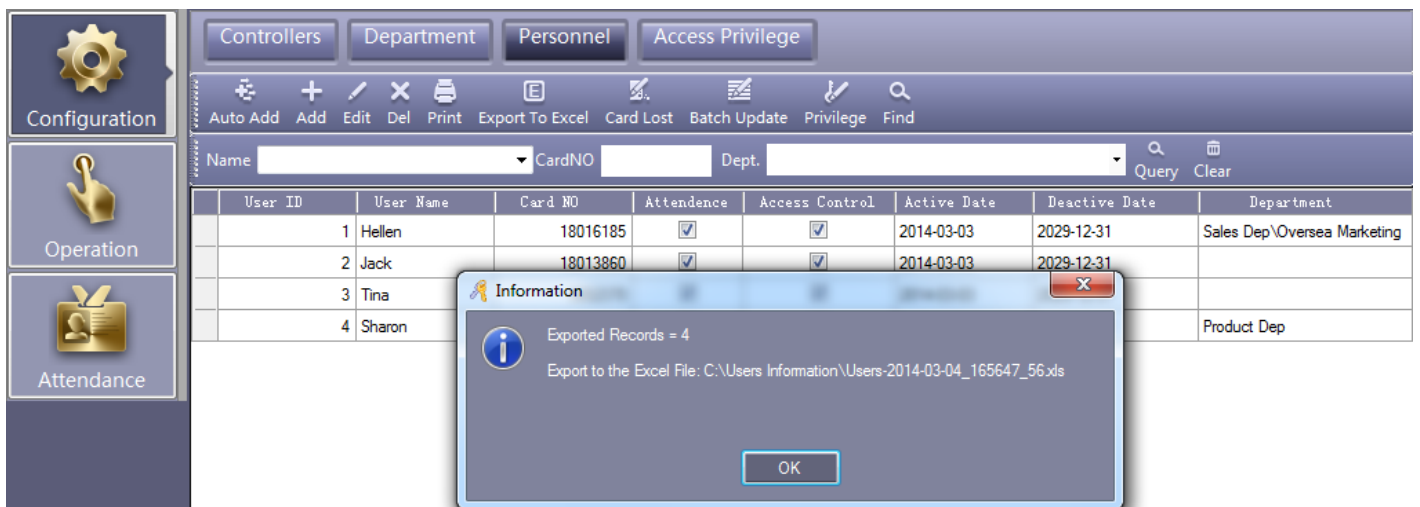

Open the exported Excel document “Users-2014-03-04\_165647\_56.xls”.


	A	B	C	D	E	F	G	H	I
1	User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department	
2									
3									
4									
5									
6									
7									
8									
9									

If the document has already users' information, delete, and then create new users data table. You just create users "Consumer NO", "Name", "Card ID" and "Department" of the data. For example:

	A	B	C	D	E	F	G	H	I
1	User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department	
2		Lucy	3544172					Sales Dep	
3		Eric	18013377						
4		Steven	18013378						
5		Tom	18013379						
6		Grace	18013380						
7		Andy	18013381						
8		James	18013382						
9		Tommy	18013383						

**Remark: department can only use "/" as separator. For example: Sales Dep\Oversea Marketing.** After create users' data, Login software "Access Control", Click **【Basic Configure】 > 【Personnel】** Mouse Right Click, Select **【Import From Excel】** and Click. Select edited Excel document "Users-2014-03-04\_165647\_56.xls"

Import customer's information from Excel successfully, there will be information prompt

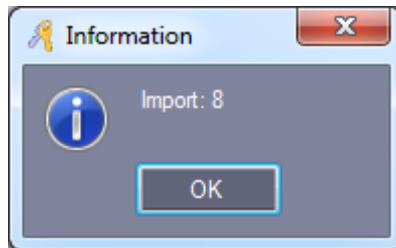

Import Result as:

	User ID	User Name	Card NO	Attendance	Access Control	Active Date	Deactive Date	Department
1	Helen	18016185	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31	Sales Dep\Oversea Marketing	
2	Jack	18013860	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31		
3	Tina	3652370	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31		
4	Sharon	3000835	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2014-03-03	2029-12-31	Product Dep	
5	Lucy	3544172	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31	Sales Dep	
6	Eric	18013377	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		
7	Steven	18013378	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		
8	Tom	18013379	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		
9	Grace	18013380	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		
10	Andy	18013381	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		
11	James	18013382	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		
12	Tommy	18013383	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	2012-01-01	2029-12-31		

## Troubleshooting

1 Q: What's the evaluation register code?

A: It is 2004



2. Q: Does this software support iOS system?

A: The software can't support iOS system and only supports all versions of Windows.

3. Q: Why can't the software find the access controller?

A: Please install the latest software version and then check whether the Ethernet cable is loose.

4. Q: Why is the card number read by the software different from the card number printed on the access keyfobs or cards?

A: This product only supports wiegand 26, and it needs to read the last 8 digits card number. But there is only the first 10 digits card number printed on some types of cards.

5. Q: What is the download link of the WEB configure software?

A: Please kindly download it via this link: [http://www.wiegand.com.cn/zip12/soft/WEBConfig\\_en.rar](http://www.wiegand.com.cn/zip12/soft/WEBConfig_en.rar)

6. Q: Can the WEB configure software and the management software be used at the same time?

A: No.

7. Q: What is the password to open iCCard3000.mdb?

A: It is 168168.

8. Q: Will this access control board support HID iclass readers?

A: Can use HID readers including Prox, iClass, iClass SE, Multiclass, Multiclass SE, etc. The limitation is that the cards you use must be 26-bit wiegand. So if you select HID cards to go with the HID reader(s), you'll want what they call H10301 format cards. These are available across the entire HID card/tag product line.

9. Q: Can the firmware be upgrader?

A: No.

**UHPPOTE**

**We Create Security**

Shenzhen Detai E-business Co.,Ltd.

**CONTACT US:**

Email: [unacart@hotmail.com](mailto:unacart@hotmail.com)

Phone Number: +0086-28-62319770 (Mon to Fri, 09:00-17:30 UTC+8)

Web: <http://www.unacart.cn>